

# AVIATION WEATHER SERVICES

## AC 00-45E



U.S. DEPARTMENT OF COMMERCE  
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION  
NATIONAL WEATHER SERVICE



U.S. DEPARTMENT OF TRANSPORTATION  
FEDERAL AVIATION ADMINISTRATION



Revised December 1999

## **FOREWORD**

AC 00-45E, Aviation Weather Services, is published jointly by the Federal Aviation Administration and the National Weather Service (NWS). This document supplements the companion manual AC 00-6A, Aviation Weather, that deals with weather theories and hazards.

This advisory circular, AC 00-45E, explains weather service in general and the details of interpreting and using coded weather reports, forecasts, and observed and prognostic weather charts. Many charts and tables apply directly to flight planning and inflight decisions. It can also be used as a source of study for pilot certification examinations.

The AC 00-45E was written primarily by Kathleen Schlachter with contributions from Jon Osterberg, Doug Streu, and Robert Prentice. A special thanks to Sue Roe for her help and patience in editing this manual.

Comments and suggestions for improving this publication are encouraged and should be directed to:

National Weather Service Coordinator, W/SR64  
Federal Aviation Administration  
Mike Monroney Aeronautical Center  
P.O. Box 25082  
Oklahoma City, OK 73125-0082

Advisory Circular AC 00-45E supersedes AC 00-45D, Aviation Weather Services, revised 1995.



## TABLE OF CONTENTS

### Section 1 - THE AVIATION WEATHER SERVICE PROGRAM

National Oceanic and Atmospheric Administration (NOAA) .....	1-1
Federal Aviation Administration (FAA) .....	1-3
Observations .....	1-8
Communications Systems .....	1-10
Users .....	1-10

### Section 2 - AVIATION ROUTINE WEATHER REPORT (METAR)

Type of Report .....	2-1
ICAO Station Identifier .....	2-2
Date and Time of Report .....	2-3
Modifier (As Required) .....	2-3
Wind .....	2-4
Visibility .....	2-5
Runway Visual Range (RVR) (As Required) .....	2-6
Weather Phenomena .....	2-6
Sky Condition .....	2-10
Temperature/Dew Point Group .....	2-19
Altimeter .....	2-19
Remarks (RMK) (As Required) .....	2-20

### Section 3 - PILOT AND RADAR REPORTS, SATELLITE PICTURES, AND RADIOSONDE ADDITIONAL DATA (RADATs)

Pilot Weather Reports (PIREPs) .....	3-1
Radar Weather Reports (SDs) .....	3-6
Satellite Weather Pictures .....	3-11
Radiosonde Additional Data (RADATs) .....	3-15

### Section 4 - AVIATION WEATHER FORECASTS

Aviation Terminal Forecast (TAF) .....	4-1
Aviation Area Forecast (FA) .....	4-17
Inflight Aviation Weather Advisories .....	4-23
Alaska, Gulf of Mexico, and International Area Forecasts (FAs) .....	4-27
Transcribed Weather Broadcast (TWEB) Text Products .....	4-31
Winds and Temperatures Aloft Forecast (FD) .....	4-35
Center Weather Service Unit (CWSU) Products .....	4-38
Hurricane Advisory (WH) .....	4-40
Convective Outlook (AC) .....	4-41
Severe Weather Watch Bulletins (WWs) and Alert Messages (AWWs) .....	4-42

**Section 5 - SURFACE ANALYSIS CHART**

Valid Time..... 5-1  
Isobars ..... 5-1  
Pressure Systems ..... 5-1  
Fronts..... 5-1  
Troughs and Ridges..... 5-1  
Other Information..... 5-2  
Using the Chart..... 5-2

**Section 6 - WEATHER DEPICTION CHART**

Plotted Data ..... 6-1  
Analysis..... 6-4  
Using the Chart..... 6-4

**Section 7 - RADAR SUMMARY CHART**

Echo (Precipitation) Type ..... 7-1  
Intensity ..... 7-2  
Echo Configuration and Coverage ..... 7-2  
Echo Tops..... 7-3  
Echo Movement ..... 7-3  
Severe Weather Watch Areas..... 7-3  
Using the Chart..... 7-3

**Section 8 - CONSTANT PRESSURE ANALYSIS CHARTS**

Plotted Data ..... 8-1  
Analysis..... 8-1  
Three-Dimensional Aspects ..... 8-3  
Using the Charts ..... 8-3

**Section 9 - COMPOSITE MOISTURE STABILITY CHART**

Stability Panel ..... 9-1  
Precipitable Water Panel ..... 9-4  
Freezing Level Panel ..... 9-5  
Average Relative Humidity Panel ..... 9-9  
Using the Chart..... 9-10

**Section 10 - WINDS AND TEMPERATURES ALOFT CHART**

Forecast Winds and Temperatures Aloft (FD)..... 10-1  
Observed Winds Aloft..... 10-3  
Using the Charts ..... 10-3  
International Flights ..... 10-4

**SECTION 11 - SIGNIFICANT WEATHER PROGNOSTIC CHARTS**

U.S. Low-Level Significant Weather (Sig Wx) Prog..... 11-1  
36- and 48-Hour Surface Prog..... 11-5  
High-Level Significant Weather Prog..... 11-6

**Section 12 - CONVECTIVE OUTLOOK CHART**

Day 1 Convective Outlook ..... 12-1  
Day 2 Convective Outlook ..... 12-1  
Levels of Risk..... 12-1  
Using the Chart..... 12-2

**Section 13 – VOLCANIC ASH ADVISORY CENTER PRODUCTS**

Volcanic Ash Advisory Statement (VAAS)..... 13-1  
Volcanic Ash Forecast Transport And Dispersion Chart (VAFTAD)..... 13-2  
VAFTAD Product ..... 13-3  
Using the Chart..... 13-3

**Section 14 - TURBULENCE LOCATIONS, CONVERSION AND DENSITY  
ALTITUDE TABLES, CONTRACTIONS AND ACRONYMS,  
SCHEDULE OF PRODUCTS, NATIONAL WEATHER SERVICE  
STATION IDENTIFIERS, WSR-88D SITES, AND INTERNET  
ADDRESSES**

Locations of Probable Turbulence ..... 14-1  
Standard Conversion Table ..... 14-3  
Density Altitude ..... 14-4  
Contractions and Acronyms ..... 14-6  
Scheduled Issuance and Valid Times of Forecast Products..... 14-20  
National Weather Service Station Identifiers..... 14-21  
WSR-88D Sites ..... 14-23  
Internet Addresses ..... 14-25

**Section 1**  
**THE AVIATION WEATHER SERVICE PROGRAM**

Providing weather service to aviation is a joint effort of the National Weather Service (NWS), the Federal Aviation Administration (FAA), the Department of Defense (DOD), and other aviation-oriented groups and individuals. This section discusses the civilian agencies of the U.S. Government and their observation and communication services to the aviation community.

**NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION (NOAA)**

The National Oceanic and Atmospheric Administration (NOAA) is an agency of the Department of Commerce. NOAA is one of the leading scientific agencies in the U.S. Government. Among its six major divisions are the National Environmental Satellite Data and Information Service (NESDIS) and the NWS.

**NATIONAL ENVIRONMENTAL SATELLITE DATA AND INFORMATION SERVICE (NESDIS)**

The National Environmental Satellite Data and Information Service (NESDIS) is located in Washington, D.C., and directs the weather satellite program. Figures 3-2 and 3-3 are examples of Geostationary Operational Environmental Satellite (GOES) images. These images are available to NWS meteorologists and a wide range of other users for operational use.

**Satellite Analysis Branch (SAB)**

The Satellite Analysis Branch (SAB) coordinates the satellite and other known information for the NOAA Volcanic Hazards Alert program under an agreement with the FAA. SAB works with the NWS as part of the Washington D.C. Volcanic Ash Advisory Center (VAAC).

**NATIONAL WEATHER SERVICE (NWS)**

The National Weather Service (NWS) collects and analyzes meteorological and hydrological data and subsequently prepares forecasts on a national, hemispheric, and global scale. The following is a description of the NWS facilities tasked with these duties.

**National Centers for Environmental Prediction (NCEP)**

There are nine separate national centers under National Centers for Environmental Prediction (NCEP), each with its own specific mission. They are the Climate Prediction Center, Space Environment Center, Marine Prediction Center, Hydrometeorological Prediction Center, Environmental Modeling Center, NCEP Center Operations, Storm Prediction Center, Aviation Weather Center, and the Tropical Prediction Center.

**National Center Operations (NCO)**

Located in Washington, D.C., the National Center Operations (NCO) is the focal point of the NWS's weather processing system. From worldwide weather reports, NCO prepares automated weather analysis charts and guidance forecasts for use by NWS offices and other users.

December 1999

Some NCO products are specifically prepared for aviation, such as the winds and temperatures aloft forecast. Figure 4-9 is the network of forecast winds and temperatures aloft for the contiguous 48 states. Figure 4-10 shows the Alaskan and Hawaiian network.

NCO is part of VAAC, which runs an ash dispersion model. NCO works with SAB to fulfill the VAAC responsibilities to the aviation communities regarding potential volcanic ash hazards to aviation.

#### Storm Prediction Center (SPC)

The Storm Prediction Center (SPC) is charged with monitoring and forecasting severe weather over the 48 continental United States. Its products include convective outlooks and forecasts, as well as severe weather watches. The center also develops severe weather forecasting techniques and conducts research. The SPC is located in Norman, Oklahoma, near the heart of the area most frequently affected by severe thunderstorms.

#### Hydrometeorological Prediction Center (HPC)

The Hydrometeorological Prediction Center (HPC) prepares weather charts which include basic weather elements of temperature, fronts and pressure patterns.

#### Aviation Weather Center (AWC)

The Aviation Weather Center (AWC), located in Kansas City, Missouri, issues warnings, forecasts, and analyses of hazardous weather for aviation interests. The center identifies existing or imminent weather hazards to aircraft in flight and creates warnings for transmission to the aviation community. It also produces operational forecasts of weather conditions expected during the next 2 days that will affect domestic and international aviation interests. As a Meteorological Watch Office (MWO) under regulations of the International Civil Aviation Organization (ICAO), meteorologists in this unit prepare and issue aviation area forecasts (FAs) and inflight weather advisories (Airman's Meteorological Information [AIRMET], Significant Meteorological Information [SIGMET], and Convective SIGMETs) for the contiguous 48 states.

#### Tropical Prediction Center (TPC)

The Tropical Prediction Center (TPC) is located in Miami, Florida. The National Hurricane Center, as an integral part of TPC, issues hurricane advisories for the Atlantic, the Caribbean, the Gulf of Mexico, the eastern Pacific, and adjacent land areas. The center also develops hurricane forecasting techniques and conducts hurricane research. The Central Pacific Hurricane Center in Honolulu, Hawaii, issues advisories for the central Pacific Ocean.

TPC prepares and distributes tropical weather, aviation and marine analyses, forecasts, and warnings. As an MWO, TPC meteorologists prepare and issue aviation forecasts, SIGMETs, and Convective SIGMETs for their tropical Flight Information Region (FIR).

#### **Weather Forecast Office (WFO)**

A Weather Forecast Office (WFO) issues various public and aviation forecast and weather warnings for its area of responsibility. In support of aviation, WFOs issue terminal aviation forecasts (TAFs) and transcribed weather broadcasts (TWEBs). As MWOs, the Guam and Honolulu Hawaii WFOs issue aviation area forecasts and inflight advisories (AIRMETs, and international SIGMETs). Figures 4-1 through 4-4 show locations for which TAFs are issued. Figure 4-8 shows the TWEB routes.

### **Alaskan Aviation Weather Advisory Unit (AAWU)**

The Alaskan Aviation Weather Unit (AAWU) is a regional aviation forecast unit located in Anchorage, Alaska. As an MWO, AAWU meteorologists prepare and issue International SIGMETs within the Alaskan FIR, as well as domestic FAs and AIRMETs for Alaska and the adjacent coastal waters. The AAWU prepares and disseminates to the FAA and the Internet a suite of graphic products, including a graphic FA and a 24- and 36-hour forecast of significant weather. The AAWU is one of nine VAACs worldwide, preparing Volcanic Ash Advisory Statements (VAAS) for the Anchorage FIR.

### **FEDERAL AVIATION ADMINISTRATION (FAA)**

The Federal Aviation Administration (FAA) is a part of the Department of Transportation. The FAA provides a wide range of services to the aviation community. The following is a description of those FAA facilities which are involved with aviation weather and pilot services.

### **FLIGHT SERVICE STATIONS (FSSs)**

The FAA is in the process of modernizing its Flight Service Station (FSS) program. The older, manual (or nonautomated) FSS is being consolidated into the newer, automated FSS (AFSS). With about one per state and with lines of communications radiating out from it, these new AFSSs are referred to as “hub” facilities. Pilot services provided previously by the older FSSs have been consolidated into facilities with new technology to improve pilot weather briefing services.

The FSS or AFSS provides more aviation weather briefing service than any other U.S Government service outlet. The FSS or AFSS provides preflight and inflight briefings, transcribed weather briefings, scheduled and unscheduled weather broadcasts, and furnishes weather support to flights in its area.

As a starting point for a preflight weather briefing, a pilot may wish to listen to one of the recorded weather briefings provided by an FSS or AFSS. For a more detailed briefing, pilots can contact the FSS or AFSS directly.

### **Transcribed Weather Broadcast (TWEB)**

The transcribed weather broadcast (TWEB) provides continuous aeronautical and meteorological information on low/medium frequency (L/MF) and very high frequency (VHF) omni-directional radio range (VOR) facilities.

At TWEB equipment locations controlling two or more VORs, the one used least for ground-to-air communications, preferably the nearest VOR, may be used as a TWEB outlet simultaneously with the nondirectional radio beacon (NDB) facility.

The sequence, source, and content of transcribed broadcast material shall be:

1. Introduction.
2. Synopsis. Prepared by selected WFOs and stored in Weather Message Switching Center (WMSC).
3. Adverse Conditions. Extracted from inflight weather advisories, center weather advisories (CWAs), and alert severe weather watch bulletins (AWWs).
4. TWEB Route Forecasts. Includes the valid time of forecasts prepared by WFOs and stored in the WMSC.
5. Winds Aloft Forecast. Broadcast for the location nearest to the TWEB. The broadcast should include the levels for 3,000 to 12,000 feet, but shall always include at least two forecast levels above the surface.
6. Radar Reports. Local or pertinent radar weather reports (SDs) are used. If there is access to real-time weather radar equipment, the observed data is summarized using the SDs to determine precipitation type, intensity, movement, and height.
7. Surface Weather Reports (METARs). Surface/special weather reports are recorded, beginning with the local reports, then the remainder of the reports beginning with the first station east of true north and continuing clockwise around the TWEB location.
8. Density Altitude. Includes temperature and the “check density altitude” statement for any station with a field elevation at or above 2,000 feet MSL and meets a certain temperature criteria.
9. Pilot Weather Reports (PIREPs). PIREPs are summarized. If the weather conditions meet soliciting requirements, a request for PIREPs will be appended.
10. Alert Notices (ALNOT), if applicable.
11. Closing Statement.

Items 2, 3, 4, and 5 are forecasts and advisories prepared by the NWS and are discussed in detail in Section 4. The synopsis and route forecasts are prepared specifically for the TWEB by WFOs. Adverse conditions, outlooks, and winds/temperature aloft are adapted from inflight advisories, area forecasts, and the winds/temperature aloft forecasts. Radar reports and pilot reports are discussed in Section 3. Surface reports are discussed in Section 2.

### **Pilots' Automatic Telephone Weather Answering System (PATWAS)**

Pilots' automatic telephone weather answering system (PATWAS) provides a continuous telephone recording of meteorological information. At PATWAS facilities where the telephone is connected to the TWEB, the information contained in the broadcast shall be in accordance with the TWEB format. PATWAS messages are recorded and updated at a minimum of every 5 hours beginning at 0600 and ending at 2200 local time using the following procedures:

1. Introduction (describing PATWAS area).
2. Adverse Conditions. Summarized inflight weather advisories, center weather advisories, alert severe weather watch bulletins, and any other available information that may adversely affect flight in the PATWAS area.
3. VFR Flight Not Recommended Statement (VNR). When current or forecast conditions, surface-based or aloft, would make visual flight doubtful.
4. Synopsis. Should be a reflection of current and forecast conditions using synopsis products prepared by selected WFOs or extracted from the synopsis section of the area forecast.
5. Current Conditions. Summarized current weather conditions over the broadcast area.
6. Surface Winds. Provided from local reports.
7. Forecast. Summarized forecast conditions over the PATWAS area.
8. Winds Aloft. Summarized winds aloft as forecast for the local station or as interpolated from forecasts of adjacent stations for levels 3,000 through 9,000 feet or a minimum of at least two forecast levels above the highest terrain.
9. Request for PIREPs, if applicable.
10. Alert Notices (ALNOT), if applicable.
11. Closing Announcement.

The PATWAS service holds high operational priority. This ensures the information is current and accurate. If service is reduced during the period of 2200-0600 local time, a suspension announcement is recorded including a time when the broadcast will be resumed. The [Airport Facility Directory](#) lists PATWAS telephone numbers for FSS briefing offices.

### **Telephone Information Briefing Service (TIBS)**

Telephone information briefing service (TIBS) is provided by AFSSs and provides continuous telephone recordings of meteorological and/or aeronautical information. TIBS shall contain area and/or route briefings, airspace procedures, and special announcements, if applicable.

TIBS should also contain, but not limited to, METARs, aviation terminal forecasts (TAFs), and winds/temperatures aloft forecasts.

Each AFSS shall provide at least four route and/or area briefings. Area briefings should encompass a 50-NM radius. Each briefing should require the pilot to access no more than two channels which shall be route- and/or area-specific. Pilots shall have access to NOTAM data through an area or route briefing on a separate channel designated specifically for NOTAMs or by access to a briefer.

TIBS service is provided 24 hours a day. Recorded information shall be updated as conditions change. Area and route forecast channels shall be updated whenever material is updated.

The order and content of the TIBS recording is as follows:

1. Introduction. Includes the preparation time and the route and/or the area of coverage.
2. Adverse Conditions. A summary of inflight weather advisories, center weather advisories, alert severe weather watch bulletins, and any other available information that may adversely affect flight in the route/area.
3. VFR Not Recommended Statement (VNR). Included when current or forecast conditions, surface or aloft, would make the flight under visual flight rules doubtful.
4. Synopsis. A brief statement describing the type, location, and movement of weather systems and/or masses which might affect the route or the area.
5. Current Conditions. A summary of current weather conditions over the route/area.
6. Density Altitude. A "check density altitude" statement will be included for any weather reporting point with a field elevation at or above 2,000 feet MSL and meets certain temperature criteria.
7. En Route Forecast. A summary of appropriate forecast data in logical order; i.e., climb out, en route, and descent.
8. Winds Aloft. A summary of winds aloft forecast for the route/area for levels through 12,000 feet.
9. Request for PIREPs, if applicable.
10. NOTAM information that affects the route/area as stated above.
11. Military Training Activity. Included in the closing announcement.
12. ALNOT Alert Announcement. If applicable.
13. Closing Announcement. Shall be appropriate for the facility equipment and the mode of operation.

Service may be reduced during the hours of 2200 and 0600 local time. During the period of reduced service, an announcement must be recorded. The Airport Facility Directory lists TIBS telephone numbers for AFSS briefing offices. A touch-tone telephone is necessary to access the TIBS program.

For those pilots already in flight and needing weather information and assistance, the following services are provided by flight service stations. They can be accessed over the proper radio frequencies printed in flight information publications.

#### Hazardous Inflight Weather Advisory Service (HIWAS)

The hazardous inflight weather advisory service (HIWAS) is a continuous broadcast of inflight weather advisories; i.e., SIGMETs, Convective SIGMETs, AIRMETs, AWWs, CWAs, and urgent PIREPs.

The HIWAS broadcast area is defined as the area within 150 NM of HIWAS outlets. HIWAS broadcasts shall not be interrupted/delayed except for emergency situations. The service shall be provided 24 hours a day.

An announcement shall be made if there are no hazardous weather advisories. Hazardous weather information shall be recorded if it is occurring within the HIWAS broadcast area. The broadcast shall include the following elements:

1. A statement of introduction including the appropriate area(s) and a recording time.
2. A summary of inflight weather advisories, center weather advisories, and alert severe weather watch bulletins, and any other weather not included in a current hazardous weather advisory.
3. A request for PIREPs, if applicable.
4. A recommendation to contact AFSS/FSS/FLIGHT WATCH for additional details concerning hazardous weather.

Once the HIWAS broadcast is updated, an announcement will be made once on all communications/NAVAID frequencies except emergency, and En Route Flight Advisory Service (EFAS). In the event that a HIWAS broadcast area is out of service, an announcement shall be made on all communications/NAVAID frequencies except emergency and EFAS.

#### En Route Flight Advisory Service (EFAS)

The en route flight advisory service (EFAS), or “Flight Watch,” is a service from selected FSSs or AFSSs on a common frequency 122.0 MHz below flight level (FL) 180 and on assigned discrete frequencies to aircraft at FL180 and above. The purpose of EFAS is to provide en route aircraft with timely and pertinent weather data tailored to a specific altitude and route using the most current available sources of aviation meteorological information. Additionally, EFAS is a focal point for rapid receipt and dissemination of pilot reports. Figure 1-1 indicates the sites where EFAS and associated outlets are located. To use this service, call for flight watch. Example, “(Oakland) FLIGHT WATCH, THIS IS...”

The following paragraphs describe other FAA facilities which provide support to the aviation community.

#### Air Traffic Control System Command Center (ATCSCC)

The Air Traffic Control System Command Center (ATCSCC), also known as “central flow control,” is located in Herndon, Virginia. ATCSCC has the mission of balancing air traffic demand with system capacity. This ensures maximum safety and efficiency for the National Airspace System while minimizing delays. The ATCSCC utilizes the Traffic Management System, aircraft situation display, monitor alert, the follow-on functions, and direct contact with the air route traffic control center (ARTCC) and terminal radar approach control facility (TRACON) traffic management units to manage flow on a national as well as local level.

Because weather is the most common reason for air traffic delays and re-routings, the ATCSCC is supported full-time by Air Traffic Control System Command Center Weather Unit Specialists (ATCSCCWUS). These specialists are responsible for the dissemination of meteorological information as it pertains to national air traffic flow management.

#### Air Route Traffic Control Center (ARTCC)

An air route traffic control center (ARTCC) is a facility established to provide air traffic control service to aircraft operating on IFR flight plans within controlled airspace and principally during the en route phase of flight. When equipment capabilities and controller workload permit, certain advisory/assistance services may be provided to VFR aircraft.

En route controllers become familiar with pertinent weather information and stay aware of current weather information needed to perform air traffic control duties. En route controllers shall advise pilots of hazardous weather that may impact operations within 150 NM of the controller’s assigned sector or area of jurisdiction.

#### Center Weather Service Unit (CWSU)

The purpose of the center weather service unit (CWSU) is to provide weather consultation, forecasts, and advice to managers and staff within ARTCCs and to other supported FAA facilities. The CWSU is a joint agency aviation weather support team located at each ARTCC. The unit is composed of NWS meteorologists and FAA traffic management personnel, the latter being assigned as Weather

Coordinators. The CWSU meteorologist provides FAA traffic managers with accurate and timely weather information. This information is based on monitoring, analysis, and interpretation of real-time weather data at the ARTCC through the use of all available data sources including radar, satellite, PIREPs, and various NWS products such as TAFs and area forecasts, inflight advisories, etc. The flow or exchange of weather information between the CWSU meteorologists and the FAA personnel in the ARTCC is the responsibility of the Weather Coordinator.

#### Air Traffic Control Tower (ATCT)

An air traffic control tower (ATCT) is a terminal facility that uses air/ground communications, visual signaling, and other devices to provide ATC services to aircraft operating in the vicinity of an airport or on the movement area. It authorizes aircraft to land or take off at the airport controlled by the tower or to transit the Class D airspace area regardless of flight plan or weather conditions (IFR or VFR). A tower may also provide approach control services.

Terminal controllers become familiar with pertinent weather information and stay aware of current weather information needed to perform air traffic control duties. Terminal controllers shall advise pilots of hazardous weather that may impact operations within 150 NM of the controller's assigned sector or area of jurisdiction. Tower cab and approach control facilities may opt to broadcast hazardous weather information alerts only when any part of the area described is within 50 NM of the airspace under the ATCT's jurisdiction.

The responsibility for disseminating weather information is shared with the NWS at many ATCT facilities. If the responsibility is not shared, the controllers are properly certified and acting as official weather observers for the elements being reported.

An automatic terminal information service (ATIS) is a continuous broadcast of recorded information in selected terminal areas. Its purpose is to improve controller effectiveness and to relieve frequency congestion by automating the repetitive transmission of noncontrol airport/terminal area and meteorological information.

#### Direct User Access Terminal Service (DUATS)

The direct user access terminal system (DUATS) provides current FAA weather and flight plan filing services to U.S. Coast Guard and certified civil pilots. The computer-based system receives and stores up-to-date weather and NOTAM data from the FAA's WMSC. Pilots using a personal computer, modem, and a telephone line can access the system and request specific types of weather briefings and other pertinent data for planned flights. The pilot can also file, amend, or cancel flight plans while dialed into the system. Further information about DUATS can be obtained from any AFSS or FAA Flight Standards District Office (FSDO).

### **OBSERVATIONS**

Weather observations are measurements and estimates of existing weather conditions both at the surface and aloft. When recorded and transmitted, an observation becomes a report; and reports are the basis of all weather analyses, forecasts, advisories, and briefings. The following paragraphs briefly describe the observation programs of the NWS and the FAA. More detailed information on each program follows.

## **SURFACE AVIATION WEATHER OBSERVATIONS (METARs)**

Surface aviation weather observations (METARs) include weather elements pertinent to flying. A network of airport stations provides routine up-to-date surface weather information. For more information on surface aviation observation, see Section 2.

## **UPPER-AIR OBSERVATIONS**

Upper-air weather data is received from sounding balloons (known as radiosonde observations) and pilot weather reports (PIREPs). Upper-air observations are taken twice daily at specified stations. These upper-air observations furnish temperature, humidity, pressure, and wind data, often to heights above 100,000 feet. In addition, pilots are a vital source of upper-air weather observations. In fact, aircraft in flight are the only means of directly observing turbulence, icing, and height of cloud tops. For more information on PIREPs, see Section 3. Recently some US and other international airlines have equipped their aircraft with instruments that automatically send weather observations via a satellite downlink. These are important observations which are used by NCEP in their production of forecasts.

## **RADAR OBSERVATIONS**

The weather radar provides detailed information about precipitation, winds, and weather systems. Doppler technology allows the radar to provide measurements of winds through a large vertical depth of the atmosphere, even within “clear air.” This information helps support public and aviation warning and forecast programs. Figure 7-2 shows the weather radar network across the United States.

FAA terminal doppler weather radars (TDWRs) are being installed near a number of major airports around the country. The TDWRs will be used to alert and warn airport controllers of approaching wind shear, gust fronts, and heavy precipitation which could cause hazardous conditions for landing or departing aircraft.

Also installed at major airports are the FAA airport surveillance radars. With this radar, specific locations of six different precipitation intensity levels are available for the routing of air traffic in and about a terminal location. However, the radar’s primary function is for aircraft detection.

## **LOW-LEVEL WIND SHEAR ALERT SYSTEM (LLWAS)**

The low-level wind shear alert system (LLWAS) provides pilots and controllers with information on hazardous surface wind conditions (on or near the airport) that create unsafe landing or departure conditions. LLWAS evaluates wind speed and direction from sensors on the airport periphery with center field wind data. During the time that an alert is posted, air traffic controllers provide wind shear advisories to all arriving and departing aircraft.

## **SATELLITE IMAGERY**

Visible, infrared (IR), and other types of images (or pictures) of clouds are taken from weather satellites in orbit. These images are then made available on a near-real-time basis to NWS and FAA facilities. Satellite pictures are an important source of weather information. For more information on satellite products, see Section 3.

## **COMMUNICATION SYSTEM**

High speed communications and automated data processing have improved the flow of weather data and products through the nation's weather network. The flow of weather information within and between agencies is becoming faster as computers and satellites are being used to facilitate the exchange of data. A new computer-based advanced weather interactive processing system (AWIPS) workstation is being deployed for the NWS. This system is replacing the current system and will allow quicker dissemination of weather information. AWIPS will be linked with the weather radars to provide better detection, observing, and forecasting of weather systems, especially severe weather.

The flow of alphanumeric weather information to the FAA service outlets is accomplished through leased lines to computer-based equipment. The NWS and FAA service outlets exchange weather information through the use of graphic products and alphanumeric information. Graphic products (weather maps) are received by FAA service outlets from NCEP through a private sector contractor. Alphanumeric information exchanged through telecommunication gateways at NWS and FAA switching centers serves to pass data between the various FAA facilities, NWS, and other users.

## **USERS**

The ultimate users of the aviation weather service are pilots and dispatchers. Maintenance personnel may use the service to keep informed of weather that could cause possible damage to unprotected aircraft. Pilots contribute to, as well as use, the service. Pilots should send PIREPs to help fellow pilots, briefers, and forecasters. The service can be no better or more complete than the information that goes into it.

In the interest of safety and in compliance with Title 14, Code of Federal Regulations, all pilots should get a complete weather briefing before each flight. It is the responsibility of the pilot to ensure he/she has all the information needed to make a safe flight.

## **OBTAINING A GOOD WEATHER BRIEFING**

When requesting a briefing, pilots should identify themselves as pilots and give clear and concise facts about their flight:

1. Type of flight (VFR or IFR)
2. Aircraft identification or pilot's name
3. Aircraft type
4. Departure point
5. Proposed time of departure
6. Flight altitude(s)
7. Route of flight
8. Destination
9. Estimated time en route (ETE)

With this background, the briefer can proceed directly with the briefing and concentrate on weather relevant to the flight. The weather information received depends on the type of briefing requested. A “standard” briefing should include:

1. Adverse conditions. Meteorological or aeronautical conditions reported or forecast that may influence a pilot to alter the proposed flight.
2. VFR flight not recommended (VNR). VFR flight is proposed and sky conditions or visibilities are present or forecast, surface or aloft, that, in the judgment of the AFSS/FSS briefer, would make flight under visual flight rules doubtful.
3. Synopsis. A brief statement describing the type, location, and movement of weather systems and/or air masses which might affect the proposed flight.
4. Current conditions. A summary from all available sources reporting weather conditions applicable to the flight.
5. En Route forecast. A summary from appropriate data forecast conditions applicable to the proposed flight.
6. Destination forecast. Destination forecast including significant changes expected within 1 hour before and after the ETA.
7. Winds aloft. Forecast winds aloft for the proposed route; temperature information on request.
8. NOTAMs. Provides NOTAMs pertinent to the flight.
9. ATC delays. Informs the pilot of any known ATC delays and/or flow control advisories that may affect the proposed flight.
10. Request for PIREPs. A request is made if a report of actual inflight conditions would be beneficial or when conditions meet the criteria for solicitation of PIREPs.
11. EFAS. Informs pilots of the availability of Flight Watch for weather updates.
12. Any other information the pilot requests; e.g., military training routes, etc.

An “abbreviated” briefing will be provided at the user’s request:

1. To supplement mass disseminated data.
2. To update a previous briefing.
3. To request that the briefing be limited to specific information.

An “outlook” briefing will be provided when the proposed departure is 6 hours or more from the time of the briefing. Briefing will be limited to applicable forecast data needed for the proposed flight.

The FSS/AFSS’s purpose is to serve the aviation community. Pilots should not hesitate to ask questions and discuss factors they do not fully understand. The briefing should be considered complete only when the pilot has a clear picture of what weather to expect. It is also advantageous for the pilot to make a final weather check immediately before departure if at all possible.

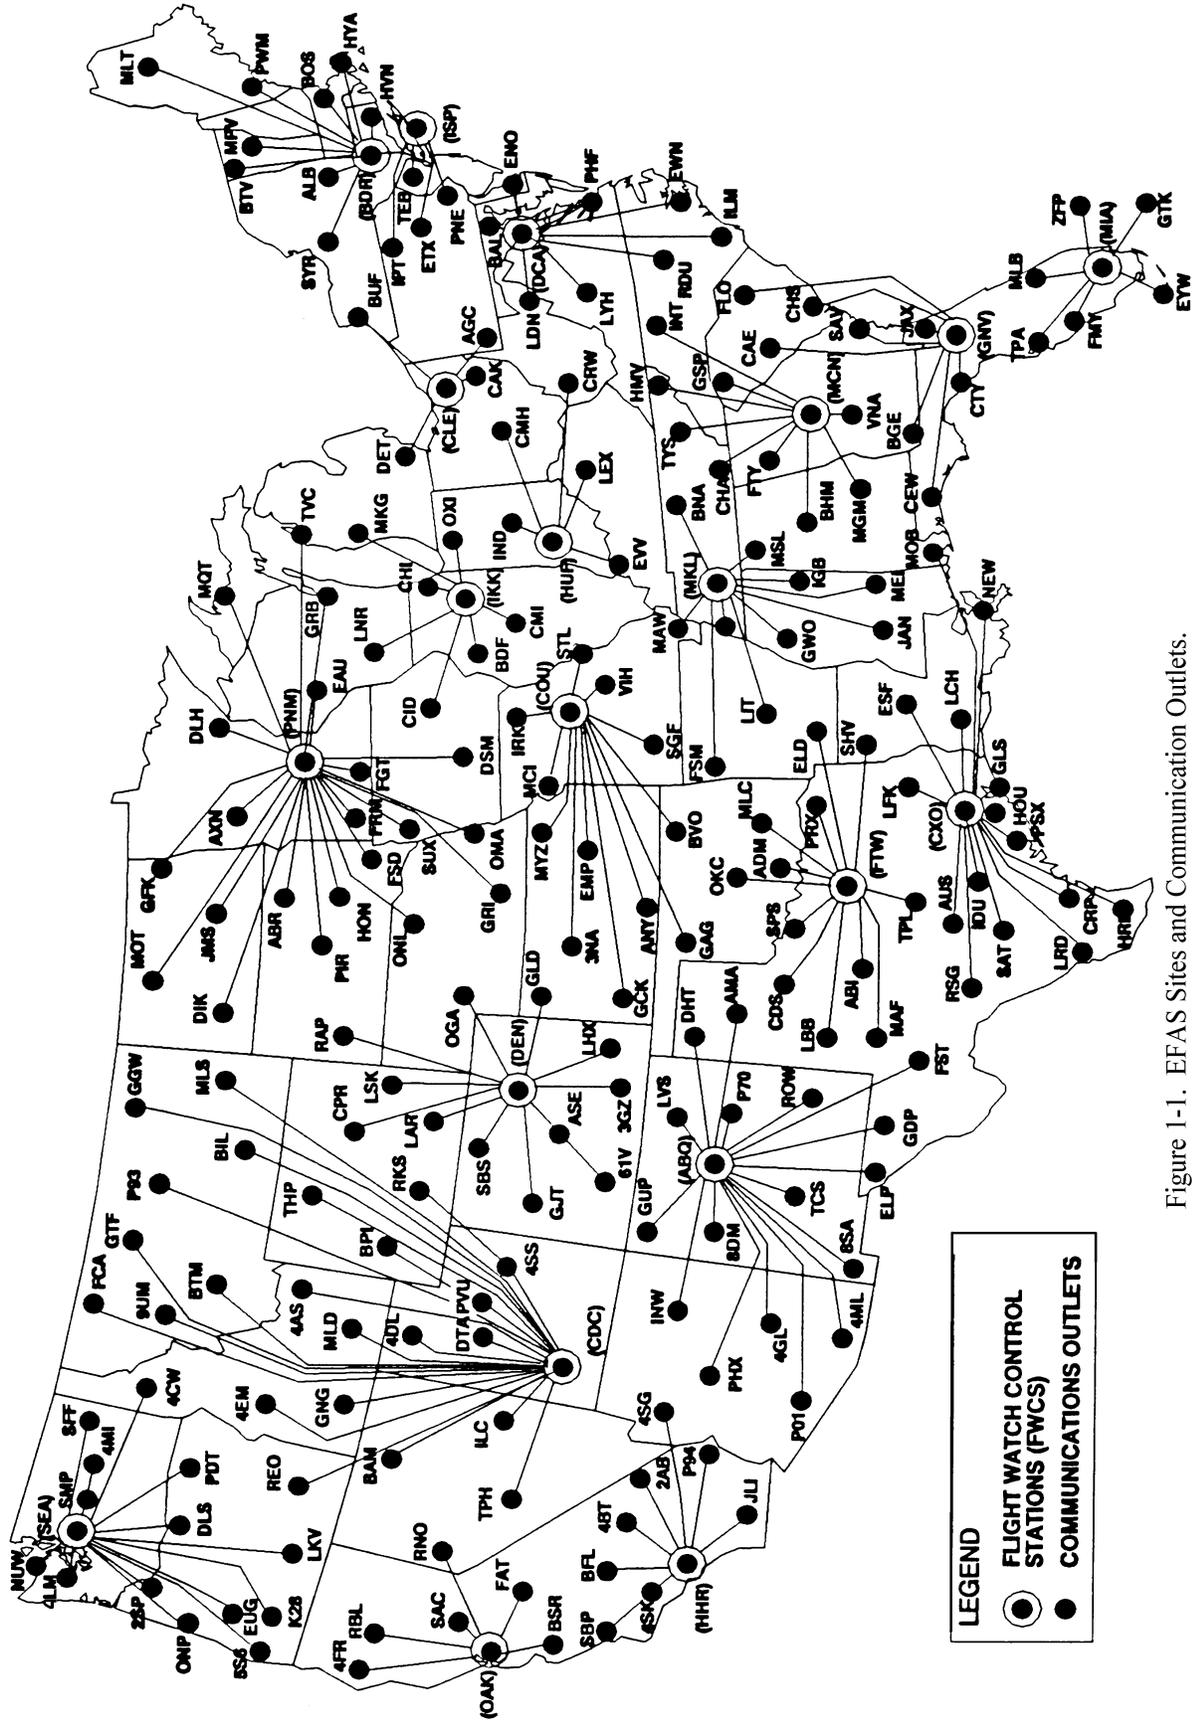


Figure 1-1. EFAS Sites and Communication Outlets.

## Section 2

### AVIATION ROUTINE WEATHER REPORT (METAR)

The aviation routine weather report (METAR) is the weather observer's interpretation of the weather conditions at a given site and time. The METAR is used by the aviation community and the National Weather Service (NWS) to determine the flying category - visual flight rules (VFR), marginal VFR (MVFR), or instrument flight rules (IFR) - of the airport, as well as produce the Aviation Terminal Forecast (TAF). (See Section 4.)

Although the METAR code is being adopted worldwide, each country is allowed to make modifications or exceptions to the code for use in that particular country. The U.S.A. reports temperature and dew point in degrees Celsius and continues to use current units of measurement for the remainder of the report.

The elements in the body of a METAR report are separated with a space. The only exception is temperature and dew point that are separated with a solidus (/). When an element does not occur, or cannot be observed, the preceding space and that element are omitted from that particular report. A METAR report contains the following elements in order as presented:

1. Type of report
2. ICAO station identifier
3. Date and time of report
4. Modifier (as required)
5. Wind
6. Visibility
7. Runway visual range (RVR) (as required)
8. Weather phenomena
9. Sky condition
10. Temperature/dew point group
11. Altimeter
12. Remarks (RMK) (as required)

The following paragraphs describe the elements in a METAR report. A sample report will accompany each element with the subject element highlighted.

#### **TYPE OF REPORT**

**METAR** KLAX 140651Z AUTO 0000KT 1SM R35L/4500V6000FT -RA BR BKN030 10/10 A2990 RMK AO2

There are two types of reports: The METAR and the aviation selected special weather report (SPECI). The METAR is observed hourly between 45 minutes after the hour till the hour and transmitted between 50 minutes after the hour till the hour. It will be encoded as a METAR even if it meets SPECI criteria. The SPECI is a non-routine aviation weather report taken when any of the SPECI criteria have been observed. The criteria are listed in Table 2-1, "SPECI Criteria."

**Table 2-1 SPECI Criteria**

Report Element	Criteria
Wind	Wind direction changes by 45 degrees or more in less than 15 minutes and the wind speed is 10 knots or more throughout the windshift.
Visibility	Surface visibility as reported in the body of the report decreases to less than, or if below, increases to equal or exceeds: 3,2, or 1mile or the lowest standard instrument approach procedure minimum as published in the National Ocean Service U.S Instrument Procedures. If none is published use ½ mile.
RVR	Changes to above or below 2,400 feet
Tornado, Funnel Cloud, Waterspout	When observed or when disappears from sight (ends)
Thunderstorm	Begins or ends
Precipitation	When freezing precipitation or ice pellets begin, end, or change intensity or hail begins or ends
Squalls	When they occur
Ceilings	The ceiling forms or dissipates below, decreases to less than, or if below, increases to equal or exceeds: 3,000, 1,500, 1,000, or 500 feet or the lowest standard instrument approach procedure minimum as published in the National Ocean Service U.S Instrument Procedures. If none is published use 200 feet.
Sky Condition	A layer of clouds or obscuring phenomenon aloft that forms below 1,000 feet
Volcanic Eruption	When an eruption is first noted
Aircraft Mishap	Upon notification of an aircraft mishap, unless there has been an intervening observation
Miscellaneous	Any other meteorological situation designated by the agency, or which, in the opinion of the observer, is critical

**ICAO STATION IDENTIFIER**

METAR **KLAX** 140651Z AUTO 0000KT 1SM R35L/4500V6000FT -RA BR BKN030 10/10 A2990 RMK AO2

The METAR code uses International Civil Aviation Organization (ICAO) four-letter station identifiers that follow the type of report. In the conterminous United States, the three-letter identifier is prefixed with K. For example SEA (Seattle) becomes KSEA. Elsewhere, the first one or two letters of the ICAO identifier indicate in which region of the world and country (or state) the station is located. Pacific locations such as Alaska, Hawaii, and the Mariana Islands start with P followed by an A, H, or G respectively. The last two letters reflect the specific reporting station identification. If the location's three-letter identification begins with an A, H, or G, the P is added to the beginning. If the location's three-letter identification does not begin with an A, H, or G, the last letter is dropped and the P is added to the beginning.

Examples:

ANC (Anchorage, AK) becomes PANC.  
OME (Nome, AK) becomes PAOM.  
HNL (Honolulu, HI) becomes PHNL.  
KOA (Keahole Point, HI) becomes PHKO.  
UAM (Anderson AFB, Guam) becomes PGUA.

Canadian station identifiers start with C.

Example:

Toronto, Canada, is CYYZ.

Mexican and western Caribbean station identifiers start with M.

Examples:

Mexico City, Mexico, is MMMX.  
Guantanamo, Cuba, is MUGT.  
Santo Domingo, Dominican Republic, is MDGM.  
Nassau, Bahamas, is MYNN.

The identifier for the eastern Caribbean is T, followed by the individual country's letter.

Example:

San Juan, Puerto Rico, is TJSJ.

For a complete worldwide listing, see ICAO Document 7910, "Location Indicators."

### **DATE AND TIME OF REPORT**

METAR KLAX **140651Z** AUTO 00000KT 1SM R35L/4500V6000FT -RA BR BKN030 10/10  
A2990 RMK AO2

The date and time the observation is taken are transmitted as a six-digit date/time group appended with **Z** to denote Coordinated Universal Time (UTC). The first two digits are the date followed with two digits for hour and two digits for minutes. If a report is a correction to a previously disseminated erroneous report, the time entered on the corrected report shall be the same time used in the report being corrected.

### **MODIFIER (AS REQUIRED)**

METAR KLAX 140651Z **AUTO** 00000KT 1SM R35L/4500V6000FT -RA BR BKN030 10/10  
A2990 RMK AO2

The modifier element, if used, follows the date/time element. The modifier, **AUTO**, identifies a METAR/SPECI report as an automated weather report with no human intervention. If AUTO is shown in the body of the report, AO1 or AO2 will be encoded in the remarks section of the report to indicate the type of precipitation sensor used at the station. A remark of AO1 indicates a report from a station that does not have a precipitation discriminator, and an AO2 remark indicates a report from a station

December 1999

which has a precipitation discriminator. The absence of AUTO indicates that the report was made manually or the automated report had human augmentation/backup.

The modifier, **COR**, identifies a corrected report that is sent out to replace an earlier report with an error.

Example:

METAR KLAX 140651Z **COR**...

### WIND

METAR KLAX 140651Z AUTO **0000KT** 1SM R35L/4500V6000FT -RA BR BKN030 10/10 A2990 RMK AO2

The wind element is reported as a five-digit group (six digits if speed is over 99 knots). The first three digits are the direction from which the wind is blowing in tens of degrees referenced to true north. Directions less than 100 degrees are preceded with a zero. The next two digits are the average speed in knots, measured or estimated, or if over 99 knots, the next three digits.

Example:

340105KT

If the wind speed is less than 3 knots, the wind is reported as calm, 0000KT. If the wind is gusty, 10 knots or more between peaks and lulls, **G** denoting gust is reported after the speed followed by the highest gust reported. The abbreviation **KT** is appended to denote the use of knots for wind speed. Other countries may use kilometers per hour or meters per second.

If the wind direction is variable by 60 degrees or more and the speed is greater than 6 knots, a variable group consisting of the extremes of the wind directions separated by **V** will follow the wind group.

Example:

08012G25KT 040V120

The wind direction may also be considered variable if the wind speed is 6 knots or less and is varying in direction (60-degree rule does not apply). This is indicated with the contraction **VRB**.

Example:

VRB04KT

### **WIND REMARKS**

At facilities that have a wind recorder or at automated weather reporting systems, whenever the peak wind exceeds 25 knots, **PK WND** will be included in the Remarks element in the next report. The peak wind remark includes three digits for direction and two or three digits for speed followed by the time in hours and minutes of occurrence. If the hour can be inferred from the report time, only the minutes are reported.

Example:  
PK WND 28045/15

When a windshift occurs, **WSHFT** will be included in the Remarks element followed by the time the windshift began (with only minutes reported, if the hour can be inferred from the time of observation). A windshift is indicated by a change in wind direction of 45 degrees or more in less than 15 minutes with sustained winds of 10 knots or more throughout the windshift. The contraction, **FROPA**, may be entered following the time if the windshift is the result of a frontal passage.

Example:  
WSHFT 30 FROPA

### **VISIBILITY**

METAR KLAX 140651Z AUTO 00000KT **1SM** R35L/4500V6000FT -RA BR BKN030 10/10 A2990  
RMK AO2

Prevailing visibility is reported in statute miles followed by a space, fractions of statute miles, as needed, and the letters **SM**. Other countries may use meters or kilometers. Prevailing visibility is considered representative of the visibility conditions at the observing site. Prevailing visibility is the greatest visibility equaled or exceeded throughout at least half the horizon circle, which need not be continuous. When visibilities are less than 7 miles, the restriction to visibility will be shown in the weather element. The only exception to this rule is that if volcanic ash, low drifting dust, sand, or snow is observed, it is reported, even if it does not restrict visibility to less than 7 miles.

### **VISIBILITY REMARKS**

If tower or surface visibility is less than 4 statute miles, the lesser of the two will be reported in the body of the report; the greater will be reported in the Remarks element.

Example:  
TWR VIS 1 1/2 or SFC VIS 1 1/2

Automated reporting stations will show visibility less than 1/4 statute mile as **M1/4SM** and visibility 10 or greater than 10 statute miles as **10SM**.

For automated reporting stations having more than one visibility sensor, site-specific visibility (which is lower than the visibility shown in the body) will be shown in the Remarks element.

Example:  
VIS 2 1/2 RWY 11

When the prevailing visibility rapidly increases or decreases by 1/2 statute mile or more during the observation, and the average prevailing visibility is less than 3 statute miles, the visibility is variable. Variable visibility is shown in the Remarks element with the minimum and maximum visibility values separated by a V.

December 1999

Example:  
VIS 1/2V2

Sector visibility is shown in the Remarks element when it differs from the prevailing visibility and either the prevailing or sector visibility is less than 3 miles.

Example:  
VIS NE 2 1/2

### **RUNWAY VISUAL RANGE (RVR) (AS REQUIRED)**

METAR KLAX 140651Z AUTO 00000KT 1SM **R35L/4500V6000FT** -RA BR BKN030 10/10  
A2990 RMK AO2

Runway visual range (RVR) follows the visibility element. RVR, when reported, is in the following format: **R** identifies the group; followed by the runway heading and, if needed, the parallel runway designator; next is a solidus (*/*); last is the visual range in feet (meters in other countries) indicated by “**FT.**” RVR is shown in a METAR/SPECI if the airport has RVR equipment and whenever the prevailing visibility is 1 statute mile or less and/or the RVR value is 6,000 feet or less. When the RVR varies by more than one reportable value, the lowest and highest values are shown with **V** between them.

Example:  
R35L/4500V6000FT

When the observed RVR is above the maximum value which can be determined by the system, it should be reported as P6000 where 6,000 is the maximum value for this system. When the observed RVR is below the minimum value which can be determined by the system, it should be reported as M0600 where 600 is the minimum value for this system.

Example:  
R27/P6000FT and R12C/M0600FT

### **WEATHER PHENOMENA**

METAR KLAX 140651Z AUTO 00000KT 1SM R35L/4500V6000FT **-RA BR** BKN030 10/10  
A2990 RMK AO2

Weather phenomena is broken into two categories: qualifiers and weather phenomena.

## QUALIFIERS

### Intensity

Intensity may be shown with most precipitation types.

A “-” denotes a light intensity level, no symbol denotes a moderate intensity level, and a “+” denotes a heavy intensity level. When more than one type of precipitation is present, the intensity refers to the first precipitation type (most predominant). (See Table 2-2.)

Example:

+SHRASN indicates heavy rainshowers and snow.

**Table 2-2 Intensity Qualifiers**

Intensity Qualifiers	
-	Light
	Moderate
+	Heavy

### Proximity

Proximity is applied to and reported only for weather phenomena occurring in the vicinity of the airport. Vicinity of the airport is defined to be between 5 and 10 miles of the usual point of observation for obscuration and just beyond to point of observation to 10 miles for precipitation. It is denoted by **VC**. Intensity and VC will never be shown in the same group.

Examples:

VCSH indicates showers in the vicinity of the airport.

VCFG indicates fog in the vicinity of the airport.

### Descriptor

The eight descriptors shown in Table 2-3 further identify weather phenomena and are used with certain types of precipitation and obscurations. Although **TS** and **SH** are used with precipitation and may be preceded with an intensity symbol, the intensity still applies to the precipitation and not the descriptor.

Example:

+TSRA is a thunderstorm with heavy rain and not a heavy thunderstorm with rain.

**Table 2-3 Descriptor Qualifiers**

<b>Descriptor</b>	
<b>MI<sup>1</sup></b>	<b>Shallow</b>
<b>BC<sup>2</sup></b>	<b>Patches</b>
<b>DR<sup>3</sup></b>	<b>Low drifting</b>
<b>BL<sup>4</sup></b>	<b>Blowing</b>
<b>SH</b>	<b>Showers</b>
<b>TS</b>	<b>Thunderstorm</b>
<b>FZ</b>	<b>Freezing</b>
<b>PR</b>	<b>Partial</b>

<sup>1</sup>MI shall be used only to further describe fog that has little vertical extent (less than 6 feet).

<sup>2</sup>BC shall be used only to further describe fog that has little vertical extent and reduces horizontal visibility.

<sup>3</sup>DR shall be used when dust, sand, or snow is raised by the wind to less than 6 feet.

<sup>4</sup>BL shall be used when dust, sand, snow, and/or spray is raised by the wind to a height of 6 feet or more.

**WEATHER PHENOMENA**

If more than one significant weather phenomenon is observed, entries will be listed in the following order: Tornadoic activity, thunderstorms, and weather phenomena in order of decreasing predominance (i.e., the most dominant type is reported first).

If more than one significant weather phenomenon is observed, except precipitation, separate weather groups will be shown in the report. No more than three weather groups will be used to report weather phenomena at or in the vicinity of the station. If more than one type of precipitation is observed, the appropriate contractions are combined into a single group with the predominant type being reported first. In such a group, any intensity will refer to the first type of precipitation in the group.

Refer to Table 2-4 while reading the rest of this section.

Examples:

TSRA indicates thunderstorm with moderate rain.

+SHRA indicates heavy rainshowers.

-FZRA indicates light freezing rain.

**Precipitation**

The types of precipitation in the METAR code are shown in Table 2-4. Precipitation is any form of water particle, whether liquid or solid, that falls from the atmosphere and reaches the ground.

Examples:

**GR** is used to indicate hail ¼ inch in diameter or larger.

**GS** is used to indicate hail less than ¼ inch in diameter.

**UP** is unknown precipitation and is used only at automated sites. This occurs when light precipitation is falling but the precipitation discriminator cannot determine the precipitation type. This situation usually occurs when rain and snow are falling at the same time.

**Obscurations**

The types of obscuration phenomena in the METAR code are shown in Table 2-4. They are any phenomena in the atmosphere, other than precipitation, that reduce horizontal visibility.

Examples:

**BR** is used to indicate mist restricting visibility and is used only when the visibility is from 5/8 mile to 6 miles.

**FG** is used to indicate fog restricting visibility and is used only when visibility is less than 5/8 mile.

**Other**

The other weather phenomena, shown in the table, are reported when they occur.

Examples:

**SQ** is a sudden increase in wind speed of at least 16 knots, the speed rising to 22 knots or more, and lasting at least 1 minute.

**+FC** is used to denote a tornado or waterspout.

**FC** is used to denote a funnel cloud.

**Table 2-4 Weather Phenomena**

<b>Precipitation</b>	<b>Obscuration</b>	<b>Other</b>
<b>DZ Drizzle</b>	<b>BR Mist</b>	<b>PO Dust/Sand whirls</b>
<b>RA Rain</b>	<b>FG Fog</b>	<b>SQ Squalls</b>
<b>SN Snow</b>	<b>DU Dust</b>	<b>FC Funnel cloud</b>
<b>SG Snow grains</b>	<b>SA Sand</b>	<b>+FC Tornado or Waterspout</b>
<b>IC Ice crystals</b>	<b>HZ Haze</b>	<b>SS Sandstorm</b>
<b>PL Ice pellets</b>	<b>PY Spray</b>	<b>DS Dust storm</b>
<b>GR Hail</b>	<b>VA Volcanic ash</b>	
<b>GS Small hail or Snow pellets</b>	<b>FU Smoke</b>	
<b>UP Unknown precipitation</b>		

December 1999

### **Weather Begins/Ends**

When weather begins or ends, the Remarks element will show the beginning and ending times of any type of precipitation or thunderstorms. Types of precipitation may be combined if beginning or ending times are the same.

Example:

RAB05E30SNB30E45 This means that rain began at 5 minutes past the hour and ended at 30 minutes past the hour, snow began at 30 minutes past the hour and ended at 45 minutes past the hour.

Example:

TSB05E45 This means a thunderstorm began at 5 minutes past the hour and ended at 45 minutes past the hour.

### **Hailstone Size**

When hailstones, **GR**, are shown in the body of a report, the largest hailstone size is shown in the Remarks element in 1/4-inch increments and identified with the contraction GR. Hailstones less than 1/4 inch are shown in the body of a report as **GS** and no remarks are entered indicating hailstone size.

Example:

GR 1  $\frac{3}{4}$

**SKY CONDITION**

METAR KLAX 140651Z AUTO 00000KT 1SM R35L/4500V6000FT -RA BR**BKN030** 10/10  
A2990 RMK AO2

Sky condition is reported in the following format:

Amount/Height/Type (as required) or Indefinite Ceiling/Height (Vertical Visibility)

**AMOUNT**

A clear sky, a layer of clouds, or an obscuring phenomenon is reported by one of the six sky cover contractions. (See Table 2-5.) When more than one layer is reported, they are reported in ascending order of height. For each layer above a lower layer or layers, the sky cover for that higher layer will be the total sky cover that includes that higher layer and all lower layers. In other words, the summation of the cloud layers from below and at that higher level determines what sky cover is reported. This summation includes both clouds and obscuration. The amount of sky cover is reported in eighths of the sky, using the contractions in Table 2-5.

**Table 2-5 Reportable Contractions for Sky Cover**

<b>Reportable Contractions</b>	<b>Meaning</b>	<b>Summation Amount</b>
<b>*SKC or CLR</b>	<b>Clear</b>	<b>0 or 0 below 12,000</b>
<b>FEW</b>	<b>Few</b>	<b>&gt;0 but &lt; 2/8</b>
<b>SCT</b>	<b>Scattered</b>	<b>3/8-4/8</b>
<b>BKN</b>	<b>Broken</b>	<b>5/8-7/8</b>
<b>OVC</b>	<b>Overcast</b>	<b>8/8</b>
<b>VV</b>	<b>Vertical Visibility (indefinite ceiling)</b>	<b>8/8</b>

\***SKC** will be reported at manual stations. The abbreviation **CLR** shall be used at automated stations when no clouds below 12,000 feet are detected.

**Note:** For aviation purposes, the ceiling is defined as the height (AGL) of the lowest broken or overcast layer aloft or vertical visibility into an obscuration.

**HEIGHT**

Cloud bases are reported with three digits in hundreds of feet above ground level.

Example:  
SCT020

Clouds above 12,000 feet cannot be detected by automated reporting systems. At reporting stations located in the mountains, if the cloud layer is below the station level, the height of the layer will be shown as three solidi (///).

Example:  
SCT///

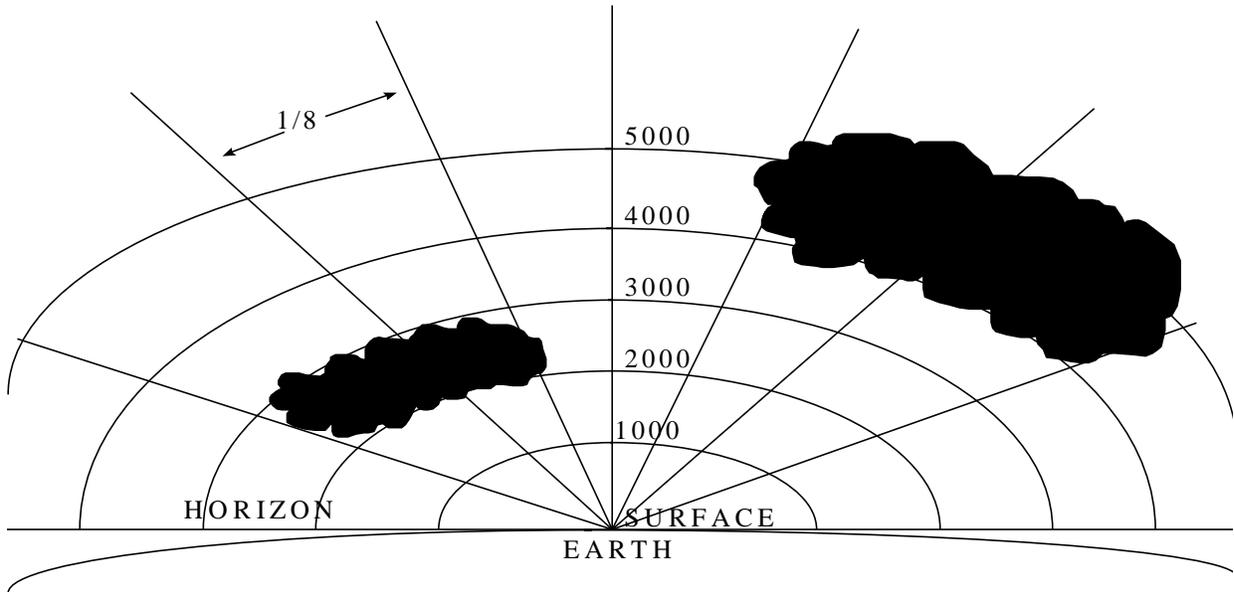


Figure 2-1. Few sky cover at 2,000 feet (2/8) and scattered sky cover at 4,000 feet (4/8). The summation of sky cover would be coded as FEW020 SCT040.

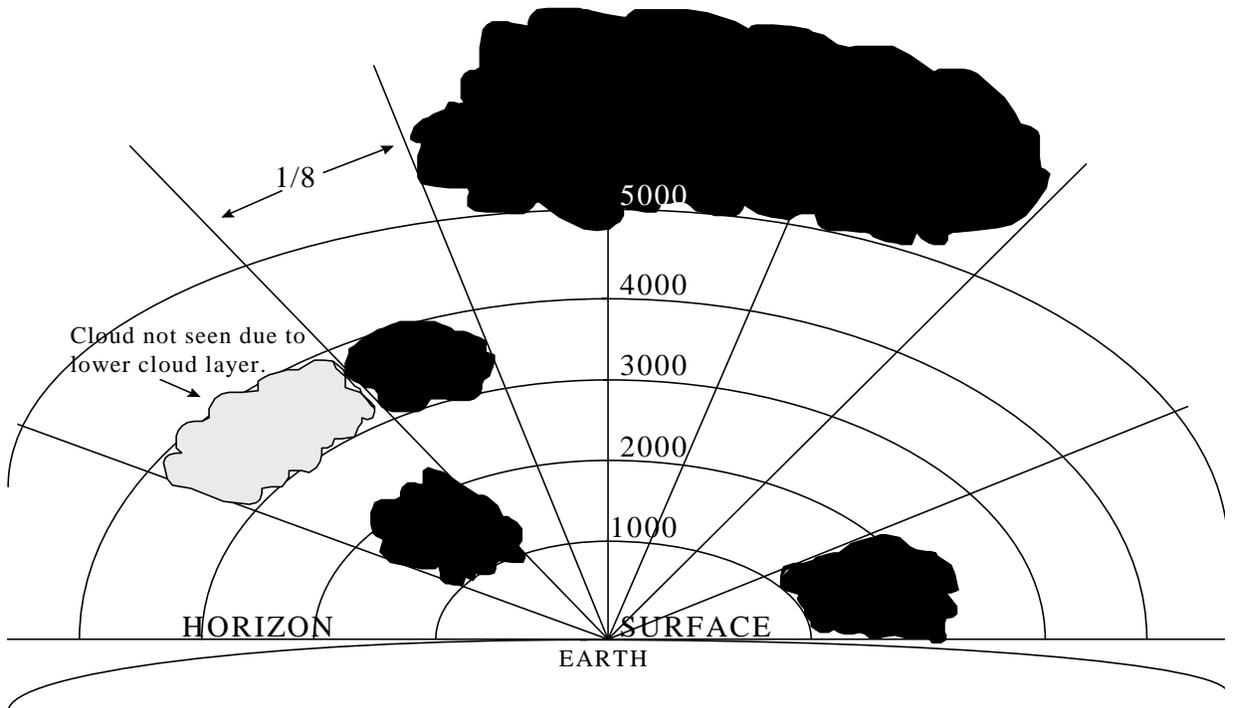


Figure 2-2. The sky cover consists of few clouds at 1,000 feet (2/8), scattered clouds at 3,000 feet (3/8), and broken clouds at 5,000 feet (6/8). This is coded as FEW010 SCT030 BKN050.

**TYPE (AS REQUIRED)**

If towering cumulus clouds, **TCU**, or cumulonimbus clouds, **CB**, are present, they are reported after the height that represents their base.

Example:

BKN025CB or SCT040TCU



Figure 2-3. Towering Cumulus (TCU). The significance of this cloud is that it indicates the atmosphere in the lower altitudes is unstable and conducive to turbulence. (Photo courtesy of National Severe Storms Laboratory/University of Oklahoma.)



Figure 2-4. Cumulonimbus (CB). The anvil portion of a CB is composed of ice crystals. The CB or thunderstorm cloud contains most types of aviation weather hazards, particularly turbulence, icing, hail, and low-level wind shear (LLWS). (Photo courtesy of Doug Streu.)

### **INDEFINITE CEILING/HEIGHTS (VERTICAL VISIBILITY)**

The height into an indefinite ceiling is preceded with VV followed by three digits indicating the vertical visibility in hundreds of feet above ground level. The layer is spoken as “indefinite ceiling” and indicates total obscuration.

Example:  
VV002

### **Partial Obscurations**

The amount of obscuration is reported in the body of the METAR when the sky is partially obscured by a surface-based phenomenon by indicating the amount of obscuration as **FEW**, **SCT**, or **BKN** followed with three zeros (**000**). The type of obscuring phenomenon is stated in the Remarks element and precedes the amount of obscuration and three zeros. For example, if fog is hiding >1/8 to 2/8 of the sky, it will be coded in the body of the METAR as “FEW000.” Because the fog is partially obscuring the sky, a remark is required. (See Figure 2-5.)

Example of Remark:  
FG FEW000.

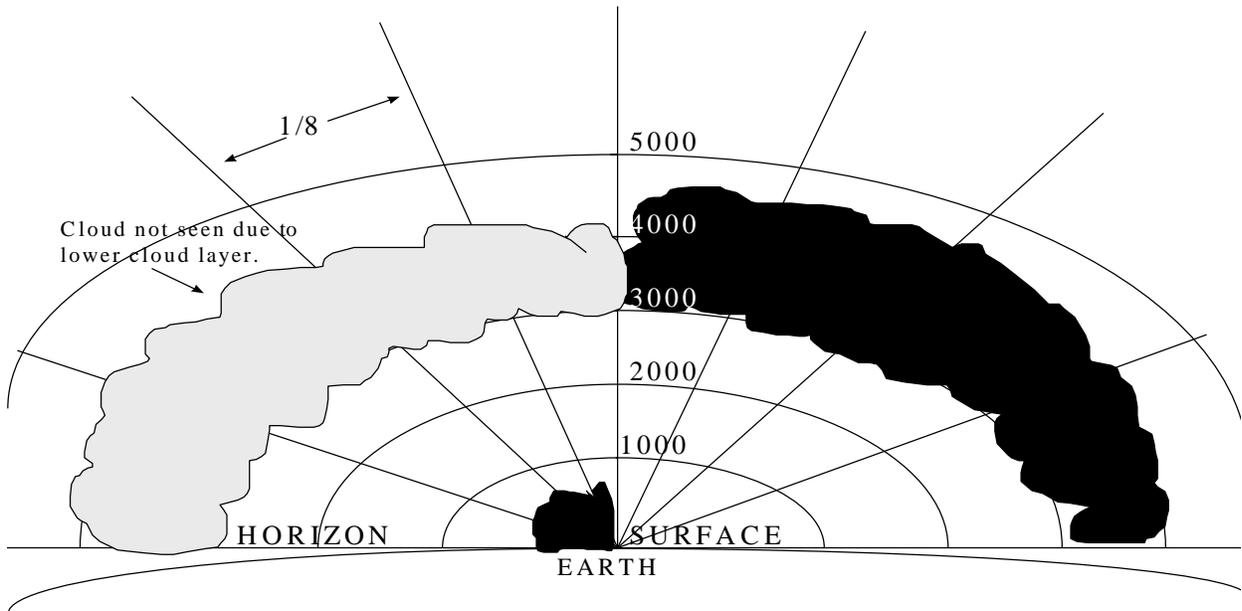


Figure 2-5. The sky cover consists of surface-based obscuration and an overcast layer at 3,000 feet. This is coded as SCT000 OVC030 with FG SCT000 in remarks.

The sky cover and ceiling, as determined from the ground, represent as nearly as possible what the pilot should experience in flight. In other words, a pilot flying at or above a reported ceiling layer (BKN-OVC) should see less than half the surface below. A pilot descending through a surface-based total obscuration should first see the ground directly below from the height reported as vertical visibility into the obscuration. However, due to the differing viewing points of the pilot and the observer, the observed values and what the pilot sees do not always exactly agree. Figure 2-6 illustrates the effect of an obscured sky on the vision from a descending aircraft.

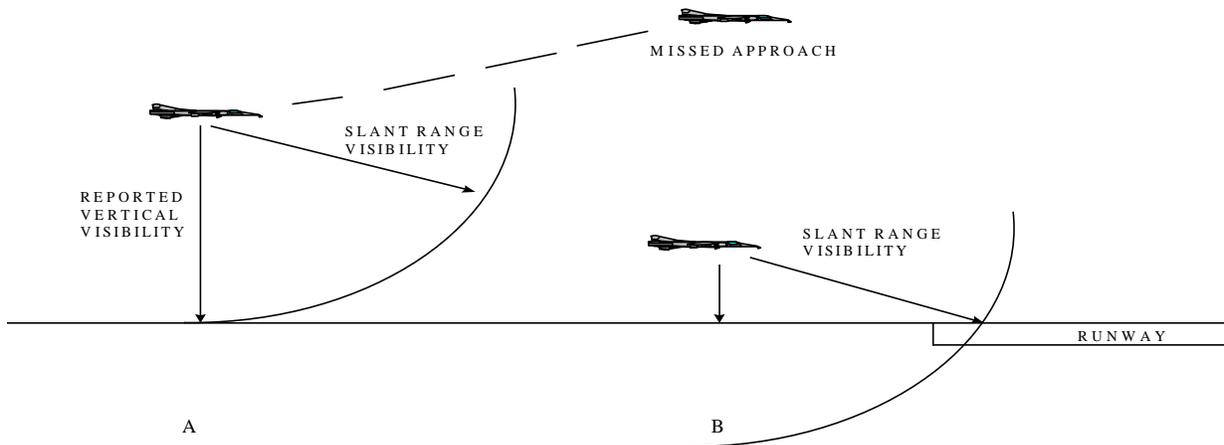


Figure 2-6. The obscuration limits runway acquisition due to slant range effects (A). This pilot would be able to see the ground but not the runway. The pilot will not be able to see the runway until position B, which is at a much lower altitude. If position A represented approach minimums, the approach could not be continued and a missed approach must be executed.

### ADDITIONAL SKY CONDITION REMARKS

Whenever the ceiling is below 3,000 feet and is variable, the remark **CIG** will be shown in the Remarks element followed with the lowest and highest ceiling heights separated with a **V**.

Example:  
CIG 005V010

When an automated station uses meteorological discontinuity sensors, site-specific sky conditions that differ from the ceiling height in the body of the report will be shown in the Remarks element.

Example:  
CIG 002 RWY 11

When a layer is varying in sky cover, the variability range will be shown in the Remarks element. If there is more than one cloud layer of the same coverage, the variable layer will be identified by including the layer height.

Example:  
BKN014 V OVC

When significant clouds are observed, they are shown in the Remarks element. The following cloud types are shown:

Towering cumulus, **TCU**, and direction from the station.

Example:

TCU W

Cumulonimbus, **CB**; or cumulonimbus mammatus, **CBMAM**; direction from the station; and direction of movement (if known). If the clouds are beyond 10 miles from the airport, **DSNT** will indicate that they are distant. (See Figure 2-7.)

Examples:

CB DSNT E or CBMAM E MOV NE

(For TCU and CB see Figures 2-3 and 2-4.)



Figure 2-7. Cumulonimbus Mammatus (CBMAM). This characteristic cloud can result from violent up- and downdrafts. This cloud type indicates possible severe or greater turbulence. (Photo courtesy of Grant Goodge taken at Asheville, NC on 4/15/87.)

December 1999

Alto cumulus castellanus, **ACC**; standing lenticular (stratocumulus, **SCSL**; alto cumulus, **ACSL**; or cirro cumulus, **CCSL**); or rotor clouds, **ROTOR CLD**, will show a remark describing the clouds (if needed) and the direction from the station.

Examples:

ACC NW or ACSL SW

(Figure 2-8 for ACC; see Figure 2-9 for standing lenticular clouds.)



Figure 2-8. Alto cumulus Castellanus (ACC). ACC indicates unstable conditions aloft, but not necessarily below the base of the cloud. (Photo courtesy of National Severe Storms Laboratory/University of Oklahoma.)



Figure 2-9. Standing Lenticular Altocumulus (ACSL). These clouds are characteristic of the standing or mountain wave. Similar clouds are rotor clouds and standing lenticular cirrocumulus (CCSL). The rotor clouds are usually at a lower altitude than the ACSL. CCSL are whiter and at a higher altitude. All three cloud types are indicative of possible severe or greater turbulence. (Photo courtesy of Grant Godge taken at Concord, CA in 1970.)

### **TEMPERATURE/DEW POINT GROUP**

METAR KLAX 140651Z AUTO 00000KT 1SM R35L/4500V6000FT -RA BR BKN030**10/10** A2990  
RMK AO2

Temperature/dew point are reported in a two-digit form in whole degrees Celsius separated by a solidus (/). Temperatures below zero are prefixed with **M**. If the temperature is available but the dew point is missing, the temperature is shown followed by a solidus. If the temperature is missing, the group is omitted from the report.

### **ALTIMETER**

METAR KLAX 140651Z AUTO 00000KT 1SM R35L/4500V6000FT -RA BR BKN030 10/10  
**A2990** RMK AO2

The altimeter element follows the temperature/dew point group and is the last element in the body of a METAR or SPECI report. It is reported in a four-digit format representing tens, units, tenths, and hundredths of inches of mercury prefixed with **A**. The decimal point is not reported or stated.

December 1999

### **ALTIMETER REMARKS**

When the pressure is rising or falling rapidly at the time of observation, Remarks element will show **PRESRR** or **PRESFR** respectively.

Some stations also include the sea-level pressure (which is different from altimeter). It is shown in the Remarks element as **SLP** being the remark identifier followed by the sea-level pressure in hectopascals (h/Pa), a unit of measurement equivalent to millibar (mb).

Example:  
SLP982

### **REMARKS (RMK) (AS REQUIRED)**

METAR KLAX 140651Z AUTO 00000KT 1SM R35L/4500V6000FT -RA BR BKN030 10/10 A2990  
**RMK AO2**

Remarks will be included in all observations, when appropriate, in the order as presented in Table 2-6. The contraction **RMK** follows the altimeter in the body and precedes the actual remarks. Time entries will be shown as minutes past the hour if the time reported occurs during the same hour the observation is taken. If the hour is different, hours and minutes will be shown. Location of phenomena within 5 statute miles of the point of observation will be reported as at the station. Phenomena between 5 and 10 statute miles will be reported as in the vicinity, **VC**. Phenomena beyond 10 statute miles will be shown as distant, **DSNT**. Direction of phenomena will be indicated with the eight points of the compass (i.e., N, NE, E, SE, S, SW, W, NW). Distance remarks are in statute miles except for automated lightning remarks that are in nautical miles. Movement of clouds or weather will be indicated by the direction toward which the phenomenon is moving.

There are two categories of remarks: automated, manual, and plain language; and additive and automated maintenance data.

### **AUTOMATED, MANUAL, AND PLAIN LANGUAGE REMARKS CATEGORY**

This group of remarks may be generated from either manual or automated weather reporting stations and generally elaborate on parameters reported in the body of the report. (See Table 2-6.)

Table 2-6 Automated, Manual, and Plain Language Remarks

Remarks	Examples of Remarks
1. Volcanic Eruptions	MT. AUGUSTINE VOLCANO 70 MILES SW ERUPTED 231505 LARGE ASH CLOUD EXTENDING TO APRX 30000 FEET MOVING NE
2. Tornado, Funnel Cloud, or Waterspout	TORNADO B13 6 NE
3. Automated Station Type	AO1 or AO2
4. Peak Wind	PK WND 28045/15
5. Windshift	WSHFT 30 FROPA
6. Tower Visibility or Surface Visibility	TWR VIS 1 ½ or SFC VIS 1 ½
7. Variable Prevailing Visibility	VIS 1/2V2
8. Sector Visibility	VIS NE 2 ½
9. Visibility at Second Site	VIS 2 ½ RWY 11
10. Lightning	OCNL LTGICCG OHD or FRQ LTGICCCCG W
11. Beginning and Ending of Precipitation	RAB05E30SNB20E55
12. Beginning and Ending of Thunderstorm	TSB05E30
13. Thunderstorm Locations	TS SE MOV NE
14. Hailstone Size	GR 1 ¾
15. Virga	VIRGA NE (See Figure 2-10.)
16. Variable Ceiling Height	CIG 005V010
17. Obscurations	FU BKN000
18. Variable Sky Condition	BKN014 V OVC
19. Significant Cloud Types	CB W MOV E or CBMAM S MOV E or TCU W or ACC NW or ACSL SW-W
20. Ceiling Height at Second Location	CIG 002 RWY 11
21. Pressure Rising or Falling Rapidly	PRESRR or PRESFR
22. Sea-Level Pressure	SLP982
23. Aircraft Mishap	(ACFT MSHP)
24. No SPECI Report Taken	NOSPECI
25. Snow Increasing Rapidly	SNINCR 2/10
26. Other Significant Information	Any other information that will impact aviation operations



FIGURE 2-10. Virga. Virga is precipitation falling from a cloud but evaporating before reaching the ground. Virga results when air below the cloud is very dry and is common in the western part of the country. Virga associated with showers suggests strong downdrafts with possible moderate or greater turbulence. (Photo courtesy of Grant Goodge.)

#### **ADDITIVE AND AUTOMATED MAINTENANCE DATA REMARKS CATEGORY**

Additive data groups are reported only at designated stations. The maintenance data groups are reported only from automated weather reporting stations. The additive data and maintenance groups are not used by the aviation community

**EXAMPLES OF METAR REPORTS AND EXPLANATIONS:**

**METAR KMKL 021250Z 33018KT 290V360 1/2SM R31/2600FT SN BLSN FG VV008 00/M03  
A2991 RMK RAESNB42 SLPNO T00111032**

<b>METAR</b>	aviation routine weather report
<b>KMKL</b>	Jackson, TN
<b>021250Z</b>	date 02, time 1250 UTC
<b>33018KT</b>	wind 330 at 18 knots
<b>290V360</b>	wind direction variable between 290 and 360 degrees
<b>1/2SM</b>	visibility one-half statute mile
<b>R31/2600FT</b>	runway 31, RVR 2600
<b>SN</b>	moderate snow
<b>BLSN FG</b>	blowing snow and fog
<b>VV008</b>	indefinite ceiling 800
<b>00/M03</b>	temperature 0°C, dew point -3°C
<b>A2991</b>	altimeter 2991
<b>RMK</b>	remarks
<b>RAESNB42</b>	rain ended at four two, snow began at four two
<b>SLPNO</b>	sea-level pressure not available
<b>T00111032</b>	temperature 1.1°C, dew point -3.2°C

The following is an example of the phraseology used to relay this report to a pilot. Optional phrases or words are shown in parentheses.

“Jackson (Tennessee), (one two five zero observation), wind three three zero at one eight, wind variable between two niner zero and three six zero, visibility one-half, runway three one RVR, two thousand six hundred, heavy snow, blowing snow, fog, indefinite ceiling eight hundred, temperature zero, dew point minus three, altimeter two niner niner one.”

December 1999

**METAR KSFO 031453Z VRB02KT 7SM MIFG SKC 15/14 A3012 RMK SLP993 6//// T01500139 56012**

<b>METAR</b>	aviation routine weather report
<b>KSFO</b>	San Francisco, CA
<b>031453Z</b>	date 03, time 1453 UTC
<b>VRB02KT</b>	wind variable at 2 knots
<b>7SM</b>	visibility 7 statute miles
<b>MIFG</b>	shallow fog
<b>SKC</b>	clear
<b>15/14</b>	temperature 15°C, dew point 14°C
<b>A3012</b>	altimeter 3012
<b>RMK</b>	remarks
<b>SLP993</b>	sea-level pressure 999.3 hectopascals
<b>6////</b>	an indeterminable amount of precipitation has occurred over the last 3 hours
<b>T01500139</b>	temperature 15.0°C, dew point 13.9°C
<b>56012</b>	atmospheric pressure lower since previous 3 hours ago

The following is an example of the phraseology used to relay this report to a pilot. Optional phrases or words are shown in parentheses.

“San Francisco (one four five three observation), wind variable at two, visibility seven, shallow fog, clear, temperature one five, dew point one four, altimeter three zero one two.”

**SPECI KCVG 312228Z 28024G36KT 3/4SM +TSRA SQ BKN008 OVC020CB 28/23 A3000 RMK TSB24 TS OHD MOV E**

<b>SPECI</b>	aviation selected special weather report
<b>KCVG</b>	Covington, KY
<b>312228Z</b>	date 31, time 2228 UTC
<b>28024G36KT</b>	wind 280 at 24, gusts 36 knots
<b>3/4SM</b>	visibility three-quarters statute mile
<b>+TSRA SQ</b>	thunderstorm with heavy rain and squalls
<b>BKN008 OVC020CB</b>	ceiling 800 broken, 2,000 overcast, cumulonimbus
<b>28/23</b>	temperature 28°C, dew point 23°C
<b>A3000</b>	altimeter 3000
<b>RMK</b>	remarks
<b>TSB24</b>	thunderstorm began at two four
<b>TS OHD MOV E</b>	thunderstorm overhead moving east

The following is an example of the phraseology used to relay this report to a pilot. Optional phrases or words are shown in parentheses.

“Covington (Kentucky), special report, two eight observation, wind two eight zero at two four, gusts three six, visibility three-quarters, thunderstorm, heavy rain, squall, ceiling eight hundred broken, two thousand overcast, cumulonimbus, temperature two eight, dew point two three, altimeter three zero zero zero, thunderstorm began two four, thunderstorm overhead, moving east.”

More examples without phraseology:

**METAR KLAX 140651Z AUTO 0000KT 10SM -RA SCT080 12/05 A2990 RMK AO2**

<b>METAR</b>	aviation routine weather report
<b>KLAX</b>	Los Angeles, CA
<b>140651Z</b>	date 14, time 0651 UTC
<b>AUTO</b>	automated site
<b>0000KT</b>	calm winds
<b>10SM</b>	visibility 10 statute miles
<b>-RA</b>	light rain
<b>SCT080</b>	8,000 scattered
<b>12/05</b>	temperature 12°C, dew point 5°C
<b>A2990</b>	altimeter 2990
<b>RMK</b>	remarks
<b>AO2</b>	automated observation with precipitation discriminator

**SPECI KDEN 241310Z 09014G35KT 1/4SM +SN FG VV002 01/01 A2975 RMK AO2 TWR VIS 1/2 RAE08SNB08**

<b>SPECI</b>	aviation selected special weather report
<b>KDEN</b>	Denver, CO
<b>241310Z</b>	date 24, time 1310 UTC
<b>09014G35KT</b>	wind 090 at 14, gusts to 35 knots
<b>1/4SM</b>	visibility one-quarter statute mile
<b>+SN FG</b>	heavy snow and fog
<b>VV002</b>	indefinite ceiling 200
<b>01/01</b>	temperature 1°C, dew point 1°C
<b>A2975</b>	altimeter 2975
<b>RMK</b>	remarks
<b>AO2</b>	automated observation with precipitation discriminator
<b>TWR VIS 1/2</b>	tower visibility one-half
<b>RAE08SNB08</b>	rain ended and snow began at 08 minutes after the hour

December 1999

**METAR KSPS 301656Z 06014KT 020V090 3SM -TSRA FEW040 BKN060CB 12/ A2982 RMK  
OCNL LTGICCG NE TSB17 TS E MOV NE PRESRR SLP093**

<b>METAR</b>	aviation routine weather report
<b>KSPS</b>	Wichita Falls, TX
<b>301656Z</b>	date 30, time 1656 UTC
<b>06014KT 020V090</b>	wind 060 at 14 knots varying between 020 and 090 degrees
<b>3SM</b>	visibility 3 statute miles
<b>-TSRA</b>	thunderstorm with light rain
<b>FEW040 BKN060CB</b>	few clouds at 4,000, ceiling 6,000 broken, cumulonimbus
<b>12/</b>	temperature 12°C (dew point is missing)
<b>A2982</b>	altimeter 2982
<b>RMK</b>	remarks
<b>OCNL LTGICCG NE</b>	occasional lightning in cloud, cloud-to-ground northeast
<b>TSB17</b>	thunderstorm began 17
<b>TS E MOV NE</b>	thunderstorm east moving northeast
<b>PRESRR</b>	pressure rising rapidly
<b>SLP093</b>	sea-level pressure 1009.3 hectopascals

**SPECI KBOS 051237Z VRB02KT 3/4SM R15R/4000FT BR OVC004 05/05 A2998 RMK AO2  
CIG 002V006**

<b>SPECI</b>	aviation selected special weather report
<b>KBOS</b>	Boston, MA
<b>051237Z</b>	date 5, time 1237 UTC
<b>VRB02KT</b>	variable wind at 2 knots
<b>3/4SM</b>	visibility three-quarters statute mile
<b>R15R/4000FT</b>	runway visual range on runway 15R 4,000 feet
<b>BR</b>	mist
<b>OVC004</b>	ceiling 400 overcast
<b>05/05</b>	temperature 5°C, dew point 5°C
<b>A2998</b>	altimeter 2998
<b>RMK</b>	remarks
<b>AO2</b>	automated observation with precipitation discriminator
<b>CIG 002V006</b>	ceiling variable 200 to 600

**Section 3**  
**PILOT AND RADAR REPORTS, SATELLITE PICTURES, AND RADIOSONDE  
 ADDITIONAL DATA (RADATs)**

The preceding section explained the decoding of METAR reports. However, these “spot” reports are only one facet of the total current weather picture. Pilot and radar reports, satellite pictures, and radiosonde additional data (RADATs) help to fill the gaps between stations.

**PILOT WEATHER REPORTS (PIREPs)**

No observation is more timely than the one made from the flight deck. In fact, aircraft in flight are the only means of observing icing and turbulence. Other pilots welcome pilot weather reports (PIREPs) as well as do the briefers and forecasters. A PIREP always helps someone and becomes part of aviation weather. Pilots should report any observation that may be of concern to other pilots. Also, if conditions were forecasted but were not encountered, a pilot should also provide a PIREP. This will help the NWS to verify forecast products and create accurate products for the aviation community. Pilots should help themselves, the aviation public, and the aviation weather forecasters by providing PIREPs.

A PIREP is transmitted in a prescribed format (see Table 3-1). Required elements for all PIREPs are type of report, location, time, flight level, aircraft type, and at least one weather element encountered. When not required, elements without reported data are omitted. All altitude references are mean sea level (MSL) unless otherwise noted. Distance for visibility is in statute miles and all other distances are in nautical miles. Time is in universal coordinated time (UTC).

**Table 3-1 PIREP Format**

<b>PIREP Format</b>	
<b>UUA/UA</b>	<b>Type of report</b>
<b>OV</b>	<b>Location</b>
<b>TM</b>	<b>Time</b>
<b>FL</b>	<b>Altitude/Flight level</b>
<b>TP</b>	<b>Aircraft type</b>
<b>SK</b>	<b>Sky cover</b>
<b>WX</b>	<b>Flight visibility and weather</b>
<b>TA</b>	<b>Temperature</b>
<b>WV</b>	<b>Wind</b>
<b>TB</b>	<b>Turbulence</b>
<b>IC</b>	<b>Icing</b>
<b>RM</b>	<b>Remarks</b>

Table 3-2 Encoding PIREPs

UUA/UA	<p><b>Type of report:</b></p> <p><b>URGENT (UUA)</b> - Any PIREP that contains any of the following weather phenomena: tornadoes, funnel clouds, or waterspouts; severe or extreme turbulence, including clear air turbulence (CAT); severe icing; hail; volcanic ash: low-level wind shear (LLWS) (pilot reports air speed fluctuations of 10 knots or more within 2,000 feet of the surface); any other weather phenomena reported which are considered by the controller to be hazardous, or potentially hazardous, to flight operations.</p> <p><b>ROUTINE (UA)</b> - Any PIREP that contains weather phenomena not listed above, including low-level wind shear reports with air speed fluctuations of less than 10 knots.</p>
/OV	<p><b>Location:</b> Use VHF NAVAID(s) or an airport using the three- or four-letter location identifier. Position can be over a site, at some location relative to a site, or along a route. Ex: /OV ABC; /OV KFSM090025; /OV OKC045020-DFW; /OV KABR-KFSD</p>
/TM	<p><b>Time:</b> Four digits in UTC. Ex: /TM 0915</p>
/FL	<p><b>Altitude/Flight level:</b> Three digits for hundreds of feet with no space between FL and altitude. If not known, use UNKN. Ex: /FL095; /FL310; /FLUNKN</p>
/TP	<p><b>Aircraft type:</b> Four digits maximum; if not known, use UNKN. Ex: /TP L329; /TP B737; /TP UNKN</p>
/SK	<p><b>Sky cover:</b> Describes cloud amount, height of cloud bases, and height of cloud tops. If unknown, use UNKN. Ex: /SK SCT040-TOP080; /SK BKNUNKN-TOP075; /SK BKN-OVC050-TOPUNKN; /SK SCT030-TOP060/OVC120; /SK FEW030; /SK SKC</p>
/WX	<p><b>Flight visibility and weather:</b> Flight visibility (FV) reported first in standard METAR weather symbols. Intensity (- for light, no qualifier for moderate, and + for heavy) shall be coded for all precipitation types except ice crystals and hail. Ex: /WX FV05SM -RA; /WX FV01SM SN BR; /WX RA</p>
/TA	<p><b>Temperature (Celsius):</b> If below zero, prefix with an "M." Temperature shall also be reported if icing is reported. Ex: /TA 15; /TA M06</p>
/WV	<p><b>Wind:</b> Direction from which the wind is blowing coded in tens of degrees using three digits. Directions of less than 100 degrees shall be preceded by a zero. The wind speed shall be entered as a two- or three-digit group immediately following the direction, coded in whole knots using the hundreds, tens, and units digits. Ex: /WV 27045KT; /WV 280110KT</p>
/TB	<p><b>Turbulence:</b> Use standard contractions for intensity and type (CAT or CHOP when appropriate). Include altitude only if different from FL. (See Table 3-3.) Ex: /TB EXTRM; /TB OCNL LGT-MOD BLW 090; /TB MOD-SEV CHOP 080-110</p>
/IC	<p><b>Icing:</b> Describe using standard intensity and type contractions. Include altitude only if different from FL. (See Table 3-4.) Ex: /IC LGT-MOD RIME; /IC SEV CLR 028-045</p>
/RM	<p><b>Remarks:</b> Use free form to clarify the report putting hazardous elements first. Ex: /RM LLWS -15 KT SFC-030 DURC RWY22 JFK</p>

Icing and turbulence reports state intensities using standard terminology when possible. To lessen the chance of misinterpretation, report icing and turbulence in standard terminology. If a PIREP stated,

“...PRETTY ROUGH AT 6,500, SMOOTH AT 8,500 PA24...,” there could be many interpretations of the strength of the turbulence at 6,500 feet. A report of “light,” “moderate,” or “severe” turbulence at 6,500 feet would have been more concise and understandable. If a pilot’s description of an icing or turbulence encounter cannot readily be translated into standard terminology, the pilot’s description should be transmitted verbatim.

**TURBULENCE**

The following table classifies each turbulence intensity according to its effect on aircraft control, structural integrity, and articles and occupants within the aircraft.

Pilots should report location(s), time (UTC), altitude, aircraft type, whether in or near clouds, intensity, and when applicable, type (CHOP/clear air turbulence [CAT]), and duration of turbulence. Duration may be based on the time the pilot is flying between two locations or over a single location.

High-level turbulence (normally above 15,000 feet AGL) that is not associated with cumuliform clouds (including thunderstorms) shall be reported as CAT.

**Table 3-3 Turbulence Reporting Criteria**

<b>Intensity</b>	<b>Aircraft Reaction</b>	<b>Reaction Inside Aircraft</b>
<b>Light</b>	<b>Turbulence that momentarily causes slight, erratic changes in altitude and/or attitude (pitch, roll, yaw). Report as light turbulence or light CAT. or Turbulence that causes slight, rapid and somewhat rhythmic bumpiness without appreciable changes in altitude or attitude. Report as light CHOP.</b>	<b>Occupants may feel a slight strain against belts or shoulder straps. Unsecured objects may be displaced slightly. Food service may be conducted and little or no difficulty is encountered in walking.</b>
<b>Moderate</b>	<b>Turbulence that causes changes in altitude and/or attitude occurs but the aircraft remains in positive control at all times. It usually causes variations in indicated airspeed. Report as moderate turbulence or moderate CAT. or Turbulence that is similar to light CHOP but of greater intensity. It causes rapid bumps or jolts without appreciable changes in aircraft or attitude. Report as moderate CHOP.</b>	<b>Occupants feel definite strains against seat belts or shoulder straps. Unsecured objects are dislodged. Food service and walking are difficult.</b>
<b>Severe</b>	<b>Turbulence that causes large, abrupt changes in altitude and/or attitude. It usually causes large variations in indicated airspeed. Aircraft may be momentarily out of control. Report as severe turbulence or severe CAT.</b>	<b>Occupants are forced violently against seat belts or shoulder straps. Unsecured objects are tossed about. Food service and walking are impossible.</b>
<b>Extreme</b>	<b>Turbulence in which the aircraft is violently tossed about and is practically impossible to control. It may cause structural damage. Report as extreme turbulence or extreme CAT.</b>	

**ICING**

The following table classifies each icing intensity according to its operational effects on aircraft.

Pilots should report location(s), time (UTC), altitude, aircraft type, temperature, and icing intensity and type (rime, clear, or mixed). Rime ice is rough, milky, opaque ice formed by the instantaneous freezing of small supercooled water droplets. Clear ice is a glossy, clear, or translucent ice formed by the relatively slow freezing of large supercooled water droplets. Mixed ice is a combination of rime and clear ice.

**Table 3-4 Icing Intensities, Airframe Ice Accumulation, and Pilot Report**

<b>Intensity</b>	<b>Airframe Ice Accumulation</b>	<b>Pilot Report</b>
<b>Trace</b>	<b>Ice becomes perceptible. Rate of accumulation slightly greater than rate of sublimation. It is not hazardous even though deicing/anti-icing equipment is not used unless encountered for an extended period of time (over 1 hour).</b>	<b>Location, time, altitude/FL, aircraft type, temperature, and icing intensity and type</b>
<b>Light</b>	<b>The rate of accumulation may create a problem if flight is prolonged in this environment (over 1 hour). Occasional use of deicing/anti-icing equipment removes/prevents accumulation. It does not present a problem if the deicing/anti-icing equipment is used.</b>	<b>Location, time, altitude/FL, aircraft type, temperature, and icing intensity and type</b>
<b>Moderate</b>	<b>The rate of accumulation is such that even short encounters become potentially hazardous and use of deicing/anti-icing equipment or diversion is necessary.</b>	<b>Location, time, altitude/FL, aircraft type, temperature, and icing intensity and type</b>
<b>Severe</b>	<b>The rate of accumulation is such that deicing/anti-icing equipment fails to reduce or control the hazard. Immediate diversion is necessary.</b>	<b>Location, time, altitude/FL, aircraft type, temperature, and icing intensity and type</b>

**EXAMPLES AND EXPLANATIONS (REFER TO TABLE 3-2):**

UUA /OV ORD/TM 1235/FLUNKN/TP B727/TB MOD/RM LLWS +/- 20KT BLW 003 DURD RWY27L

Urgent UA over Chicago O’Hare Airport, Chicago, IL, at 1235Z. Flight level is unknown but the information is from a Boeing 727. Turbulence was moderate and on descent to runway 27 left, low-level wind shear was detected below 300 feet. Airspeed fluctuations were plus and minus 20 knots.

UUA /OV ABQ090045/TM 1430/FL130/TP BE30/TB SEV/RM BROKE ALL THE BOTTLES IN THE BAR

An urgent UA 45 miles east of Albuquerque, NM, a pilot of a Beech King Air 300 reported severe turbulence at 13,000 feet. The pilot remarked the turbulence was so severe it broke all the bottles in the passenger cabin bar.

UA /OV KMRB-KPIT/TM 1600/FL100/TP BE55/SK BKN024-TOP032/BKN-OVC043-TOPUNKN /TA M12/IC LGT-MOD RIME 055-080

This PIREP is decoded as follows: UA, Martinsburg to Pittsburgh, Pennsylvania (PA), at 1600 UTC at 10,000 feet MSL. Type of aircraft is a Beechcraft Baron. First cloud layer is broken with a base at 2,400 feet MSL broken and tops at 3,200 feet MSL. The second cloud layer is broken to occasionally overcast with a base at 4,300 feet MSL, and tops unknown. Outside air temperature is -12 degrees Celsius. Light to moderate rime icing is reported between 5,500 and 8,000 feet MSL.

UA /OV KOKC090064/TM 1522/FL080/TP C172/SK SCT090-TOPUNKN/WX FV05SM HZ/TA M04/WV 24540KT/TB LGT/RM IN CLR.

This PIREP is decoded as follows: UA, 64 nautical miles east of Oklahoma City VOR at 1522 UTC, flight level 8,000 feet MSL. Type of aircraft is a Cessna 172. There is a scattered cloud layer with bases at 9,000 feet MSL and unknown tops. Flight visibility is restricted to 5 statute miles due to haze. Outside air temperature is -4 degrees Celsius, wind is 245 degrees at 40 knots, light turbulence, and the aircraft is in clear skies.

UA /OV KLIT-KFSM/TM 0310/FL100/TP BE36/SK SCT070-TOP110/TA M03/WV 25015KT.

This PIREP is decoded as follows: UA between Little Rock and Fort Smith, Arkansas (AR), at 0310 UTC. A Beech 36 is at 10,000 feet MSL. There is a scattered cloud layer with bases at 7,000 feet MSL, and tops at 11,000 feet MSL. The outside air temperature is -3 degrees Celsius. Winds are from 250 degrees at 15 knots.

UA /OV KABQ/TM 1845/RM TIJERAS PASS CLSD DUE TO FG AND LOW CLDS UNA VFR RTN ABQ.

The PIREP is over Albuquerque at 1845 UTC. The remark section indicates the Tijeras pass is closed due to fog and low clouds. The pilot also mentions that she/he could not continue VFR and returned to Albuquerque.

UA /OV KTOL/TM 2200/FL310/TP B737/TB MOD CAT 350-390.

This PIREP is decoded as follows: UA over Toledo, Ohio, at 2200 UTC and flight level 310, a Boeing 737 reported moderate clear air turbulence between 35,000 and 39,000 feet MSL.

Nonmeteorological PIREPs sometimes help air traffic controllers. This "plain language" report stated:

.../RM 3N PNS LARGE FLOCK OF BIRDS HDG GEN N MAY BE SEAGULLS FRMN ...

This PIREP alerted pilots and controllers to a bird hazard.

**RADAR WEATHER REPORT (SD)**

General areas of precipitation, including rain, snow, and thunderstorms, can be observed by radar. The radar weather report (SD) includes the type, intensity, and location of the echo top of the precipitation. (The intensity trend of precipitation is no longer coded on the SD.) It is important to remember that all heights are reported above MSL. Table 3-5 explains symbols denoting intensity. Radar stations report each hour at H+35.

Example of an SD:

**TLX 1935**   **LN**   **8**   **TRW++**   **86/40 164/60**   **20W**   **C2425**   **MTS 570 AT 159/65**   **AUTO**  
 a.            b.    c.            d.                    e.                    f.                    g.                    h.                    i.

**^MO1 NO2 ON3 PM34 QM3 RL2 =**  
 j.

Above SD report decoded as follows:

- a. Location identifier and time of radar observation (Oklahoma City SD at 1935 UTC).
- b. Echo pattern (LN in this example). The echo pattern or configuration may be one of the following:
  - 1. Line (LN) is a line of convective echoes with precipitation intensities that are heavy or greater, at least 30 miles long, at least 4 times as long as it is wide, and at least 25% coverage within the line.
  - 2. Area (AREA) is a group of echoes of similar type and not classified as a line.
  - 3. Cell (CELL) is a single isolated convective echo such as a rain shower.
- c. Coverage, in tenths, of precipitation in the defined area (8/10 in this example).
- d. Type and intensity of weather (thunderstorm [T] with very heavy rainshowers [RW++]).

**Table 3-5 Precipitation Intensity**

<b>Symbol</b>	<b>Intensity</b>
-	<b>Light</b>
(none)	<b>Moderate</b>
+	<b>Heavy</b>
++	<b>Very Heavy</b>
<b>X</b>	<b>Intense</b>
<b>XX</b>	<b>Extreme</b>

**Table 3-6 Symbols Used in SD**

<u>Symbol Meaning</u>	
<b>R</b>	<b>Rain</b>
<b>RW</b>	<b>Rain shower</b>
<b>S</b>	<b>Snow</b>
<b>SW</b>	<b>Snow shower</b>
<b>T</b>	<b>Thunderstorm</b>

Example of an SD:

TLX 1935   LN 8   TRW++   86/40 164/60   20W   C2425   MTS 570 AT 159/65   AUTO  
 a.            b.   c.            d.            e.            f.            g.            h.            i.

^MO1 NO2 ON3 PM34 QM3 RL2 =  
 j.

- e. Azimuth, referenced to true north, and range, in nautical miles (NM) from the radar site, of points defining the echo pattern (86/40 164/60 in this echo). For lines and areas, there will be two azimuth and range sets that define the pattern. For cells, there will be only one azimuth and range set. (See the examples that follow for elaboration of echo patterns.)
- f. Dimension of echo pattern (20 NM wide in this example). The dimension of an echo pattern is given when azimuth and range define only the center line of the pattern. (In this example, "20W" means the line has a total width of 20 NM, 10 miles either side of a center line drawn from the points given in item "e" above.)
- g. Cell movement (cells within line moving from 240 degrees at 25 knots in this example). Movement is only coded for cells; it will not be coded for lines or areas.
- h. Maximum top and location (57,000 feet MSL on radial 159 degrees at 65 NM in this example). Maximum tops may be coded with the symbols "MT" or "MTS." If it is coded with "MTS" it means that satellite data as well as radar information was used to measure the top of the precipitation.
- i. The report is automated from WSR-88D weather radar data.
- j. Digital section is used for preparing radar summary chart.

To aid in interpreting SDs, the five following examples are decoded into plain language.

GRB 1135 AREA 4TRW+ 9/100 130/75 50W C2425 MT 310 at 45/47 AUTO

Green Bay, WI, Automated SD at 1135 UTC. An area of echoes, 4/10 coverage, containing thunderstorms and heavy rain showers. Area is defined by points (referenced from GRB radar site) at 9 degrees, 100 NM and 130 degrees, 75 NM. These points, plotted on a map and connected with a straight line, define the center line of the echo pattern. The width of the area is 50 NM; i.e., 25 NM either side of the center line. The cells are moving from 240 degrees at 25 knots. Maximum top is 31,000 feet MSL located at 45 degrees and 47 NM from GRB.

December 1999

ICT 1935 LN 9TRWX 275/80 210/90 20W C2430 MTS 440 AT 260/48 AUTO

Wichita, KS, Automated SD at 1935 UTC. A line of echoes, 9/10 coverage, containing thunderstorm with intense rain showers. The center of the line extends from 275 degrees, 80 NM to 210 degrees, 90 NM. The line is 20 NM wide. **NOTE:** To display graphically, plot the center points on a map and connect the points with a straight line; then plot the width. Since the thunderstorm line is 20 miles wide, it extends 10 miles either side of your plotted line. The thunderstorm cells are moving from 240 degrees at 30 knots. The maximum top is 44,000 feet MSL at 260 degrees, 48 NM from ICT.

GGW 1135 AREA 3S- 90/120 150/80 34W MT 100 at 130/49

Glasgow, MT, Automated SD at 1135 UTC. An area, 3/10 coverage, of light snow. The area's centerline extends from points at 90 degrees, 120 NM to 150 degrees, 80 NM. The area is 34 NM wide. No movement was reported. The maximum top is 10,000 feet MSL, at 130 degrees, 49 NM.

MAF 1135 AREA 2TRW++6R- 67/130 308/45 105W C2240 MT 380 AT 66/54

Midland/Odessa, TX, Automated SD at 1135 UTC. An area of echoes, total coverage 8/10, with 2/10 of thunderstorms with very heavy rainshowers and 6/10 coverage of light rain. (This suggests that the thunderstorms are embedded in an area of light rain.) The area lies 52½ miles either side of the line defined by the two points, 67 degrees, 130 NM and 308 degrees, 45 NM.

When an SD is transmitted but does not contain any encoded weather observation, a contraction is sent which indicates the operational status of the radar.

Example:

TLX 1135 PPINE AUTO

It is decoded as Oklahoma City, OK's, radar at 1135 UTC detects no echoes.

**Table 3-7 Operational Status Contractions**

<b>Contraction</b>	<b>Operational Status</b>
<b>PPINE</b>	<b>Radar is operating normally but there are no echoes being detected.</b>
<b>PPINA</b>	<b>Radar observation is not available.</b>
<b>PPIOM</b>	<b>Radar is inoperative or out of service.</b>
<b>AUTO</b>	<b>Automated radar report from WSR-88D.</b>

All SDs also contain groups of digits.

Example:

**^MO1 NO1 ON3 PM34 QM3 RL2 SL1=**

These groups of digits are the final entry on the SD. This digitized radar information is used primarily in preparing the radar summary chart. However, by using a proper grid overlay chart for the corresponding radar site, this code is also useful in determining more precisely where the precipitation is occurring within an area as well as the intensity of the precipitation. (See Figure 3-1 for an example of a digital code plotted from the Oklahoma City, OK, SD.)

The digit assigned to a box represents the intensity of precipitation as determined by the WSR-88D and is the maximum precipitation intensity found within the grid box. (See Table 7-2 for definitions of precipitation intensities associated with digits 1 through 6.) These digits were once commonly referred to as VIP levels because precipitation intensity, and therefore the digits, was derived using a video integrator processor (VIP). Since the WSR-88D and not the video integrator processor is now used to determine precipitation intensity, it is suggested that the term VIP should no longer be used when describing precipitation intensity. For example, if a specific grid has the number 2 associated with it, that grid would be described as having moderate precipitation, not VIP level 2 precipitation.

A box is identified by two letters, the first representing the row in which the box is found and the second letter representing the column. For example "MO1" identifies the box located in row M and column O as containing light precipitation. A code of "MO1234" indicates precipitation in four consecutive boxes in the same row. Working from left to right box MO = 1, box MP = 2, MQ = 3 and box MR = 4.

When using hourly SDs in preflight planning, note the location and coverage of echoes, the type of weather reported, the intensity, and especially the direction of movement.

It is important to remember that the SD contains information pertaining to the location of particles in the atmosphere that are of precipitation size or larger. It does not display locations of cloud-size particles, and, therefore, neither ceilings nor restrictions to visibility. An area may be blanketed with fog or low stratus, but the SD would not include information about it. Pilots should use SDs along with METARs, satellite photos, and forecasts when planning a flight.

The SDs help pilots plan ahead to avoid thunderstorm areas. Once airborne, however, pilots must depend on contact with Flight Watch, which has the capability to display current radar images, airborne radar, or visual sighting to evade individual storms.

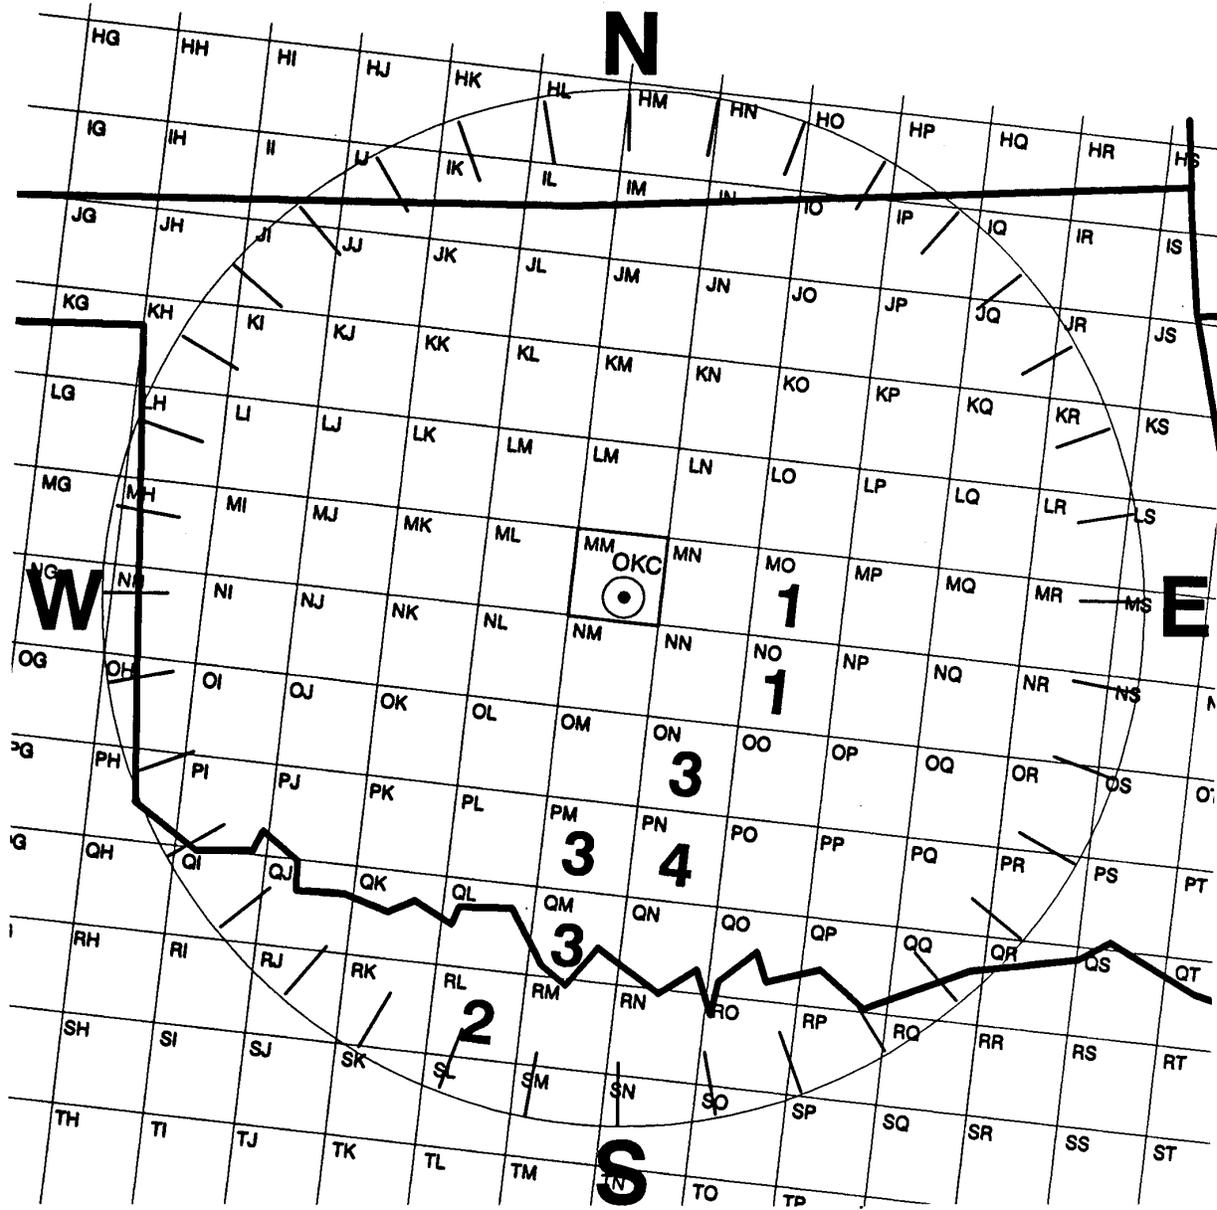


Figure 3-1. Digital Radar Report Plotted on a PPI Grid Overlay Chart.  
(Note: See Table 7-2 for Intensity Level Codes 1 through 6.)

## **SATELLITE WEATHER PICTURES**

Prior to weather satellites, weather observations were made only at distinct points within the atmosphere and supplemented by PIREPs. These PIREPs gave a “sense” of weather as viewed from above. However, with the advent of weather satellites, a whole new dimension to weather observing and reporting has emerged. There are two types of weather satellites in use by the U. S. today: Geostationary Operational Environmental Satellite (GOES), which is a geostationary satellite, and the Polar Orbiter Environmental Satellite (POES). Additional satellite imagery is available from the European Meteosat and the Japanese GMS geostationary satellites.

Two U.S. GOES satellites are used for imaging. One is stationed over the equator at 75 degrees west longitude and is referred to as GOES EAST since it covers the eastern U.S. The other is positioned at 135 degrees west longitude and is referred to as GOES WEST since it covers the western U.S. Together they cover North and South America and surrounding waters. They normally transmit an image of Earth, pole to pole, every 15 minutes. When disastrous weather threatens the U.S., the satellites can scan small areas rapidly so that a picture can be received as often as every 1 minute. Data from these rapid scans are used at NWS offices.

Since the GOES satellite is stationary over the equator, the images poleward of about 50 degrees latitude become greatly distorted. For images above 50 degrees latitude, polar orbiting satellites are employed. The NOAA satellite is a polar orbiter and orbits the earth on a track that nearly crosses the North and South poles. A high resolution picture is produced about 500 miles either side of its track on the journey from pole to pole. The NOAA pictures are essential to weather personnel in Alaska and Canada.

Two types of imagery are available from satellites, and, when combined, give a great deal of information about clouds. Through interpretation, the analyst can determine the type of cloud, the temperature of cloud tops (from this, the approximate height of the cloud can be determined), and the thickness of cloud layers. From this information, the analyst gets a good idea of the associated weather.

One type of imagery is visible (Figure 3-2). A visible image shows clouds and Earth reflecting sunlight to the satellite sensor. The greater the reflected sunlight reaching the sensor, the whiter the object is on the picture. The amount of reflectivity reaching the sensor depends upon the height, thickness, and ability of the object to reflect sunlight. Since clouds are much more reflective than most of the Earth, clouds will usually show up white on the picture, especially thick clouds. Thus, the visible picture is primarily used to determine the presence of clouds and the type of cloud from shape and texture. Due to the obvious lack of sunlight, there are no visible images available at night.

The second type of imagery is infrared (IR) (Figure 3-3). An IR picture shows heat radiation being emitted by clouds and Earth. The images show temperature differences between cloud tops and the ground, as well as temperature gradations of cloud tops and along the Earth’s surface. Ordinarily, cold temperatures are displayed as light gray or white. High clouds appear the whitest. However, various computer-generated enhancements are sometimes used to sharply illustrate important temperature contrasts. IR images measure cloud top temperatures and are used to approximate the height of clouds. From this, one can see the importance of using visible and IR imagery together when interpreting clouds. IR images are available both day and night.

December 1999

Satellite images are processed by the NWS as well as by many private companies. Therefore, they can be received from many different sources. Depending upon the source, satellite images may be updated anywhere from every 15 minutes to every hour; therefore, it is important to note the time on the images when interpreting them. By viewing satellite images, the development and dissipation of weather can be seen and followed over the entire country and coastal regions.

NESDIS is developing the capability to provide derived products useful to aviation from satellite data. These experimental products are available via the Internet and include:

1. Fog and low cloud coverage and depth.
2. Volcanic ash detection.
3. Microburst products.
4. Soundings.
5. Clear air turbulence.
6. Aircraft icing potential.

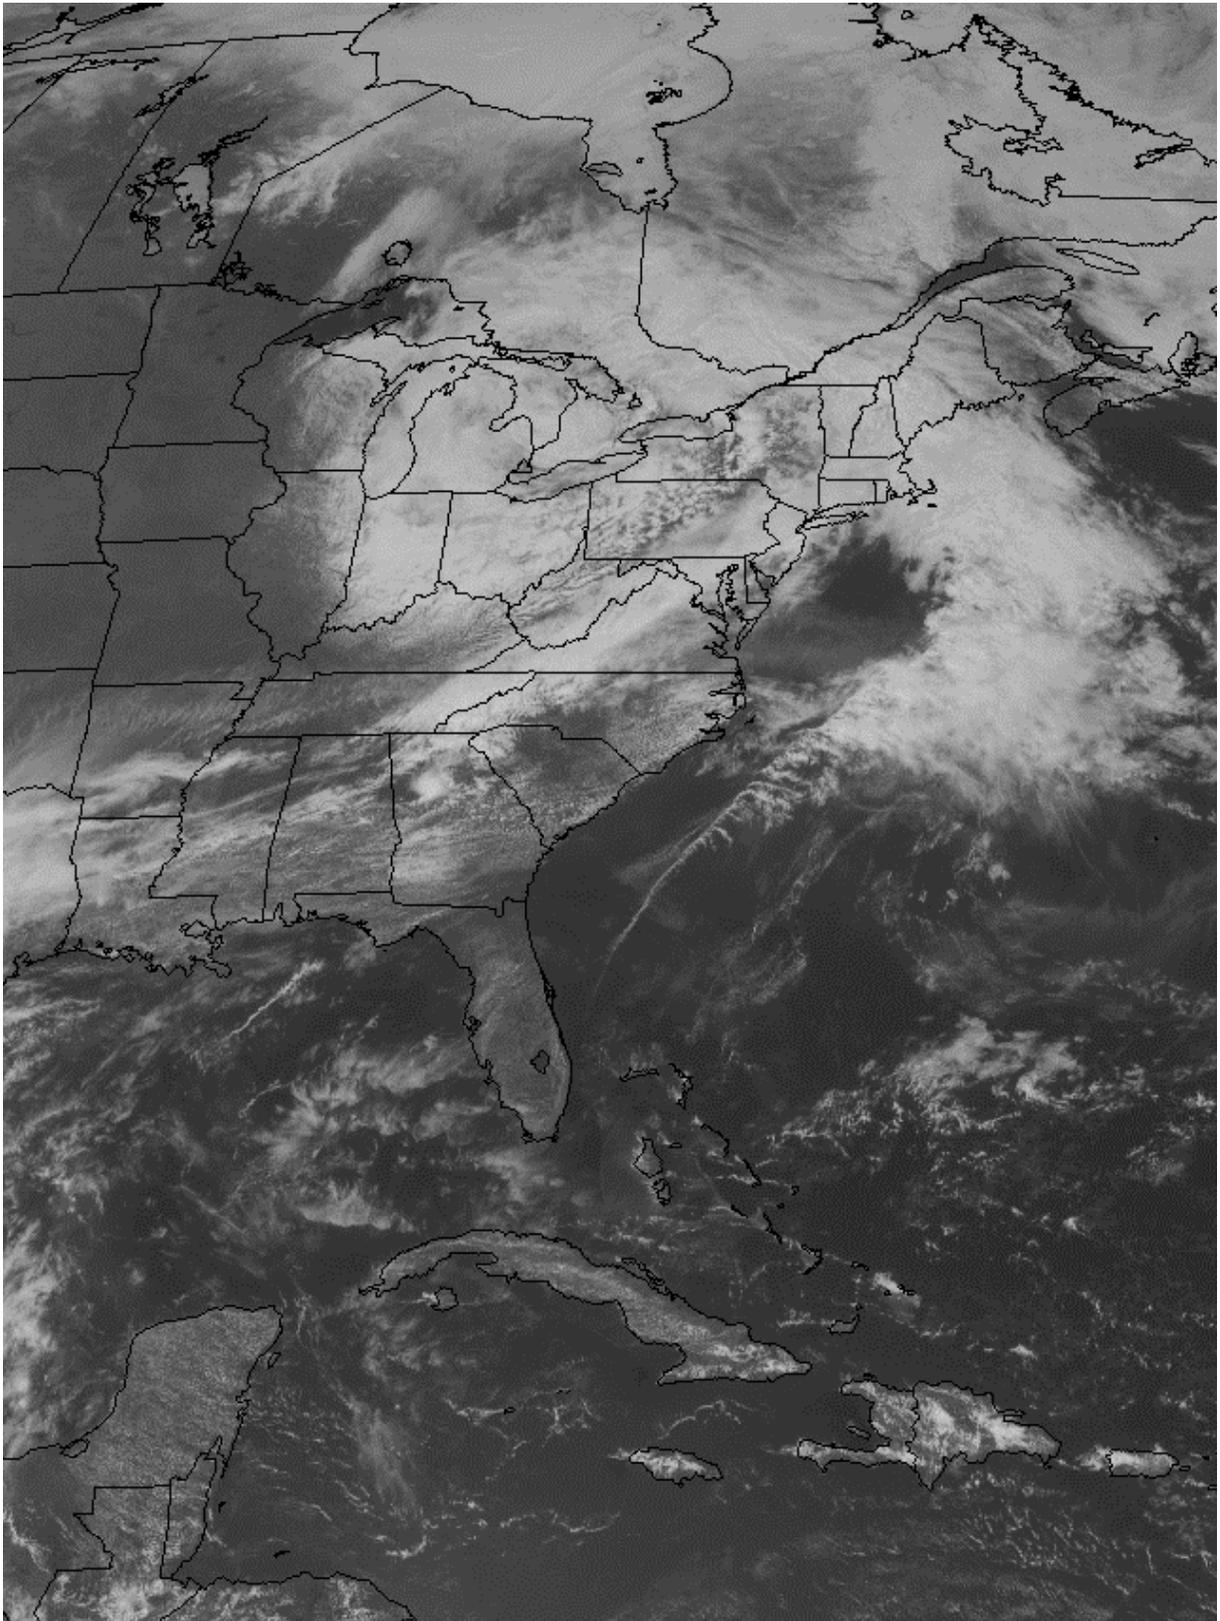


Figure 3-2. Visible Satellite Imagery.

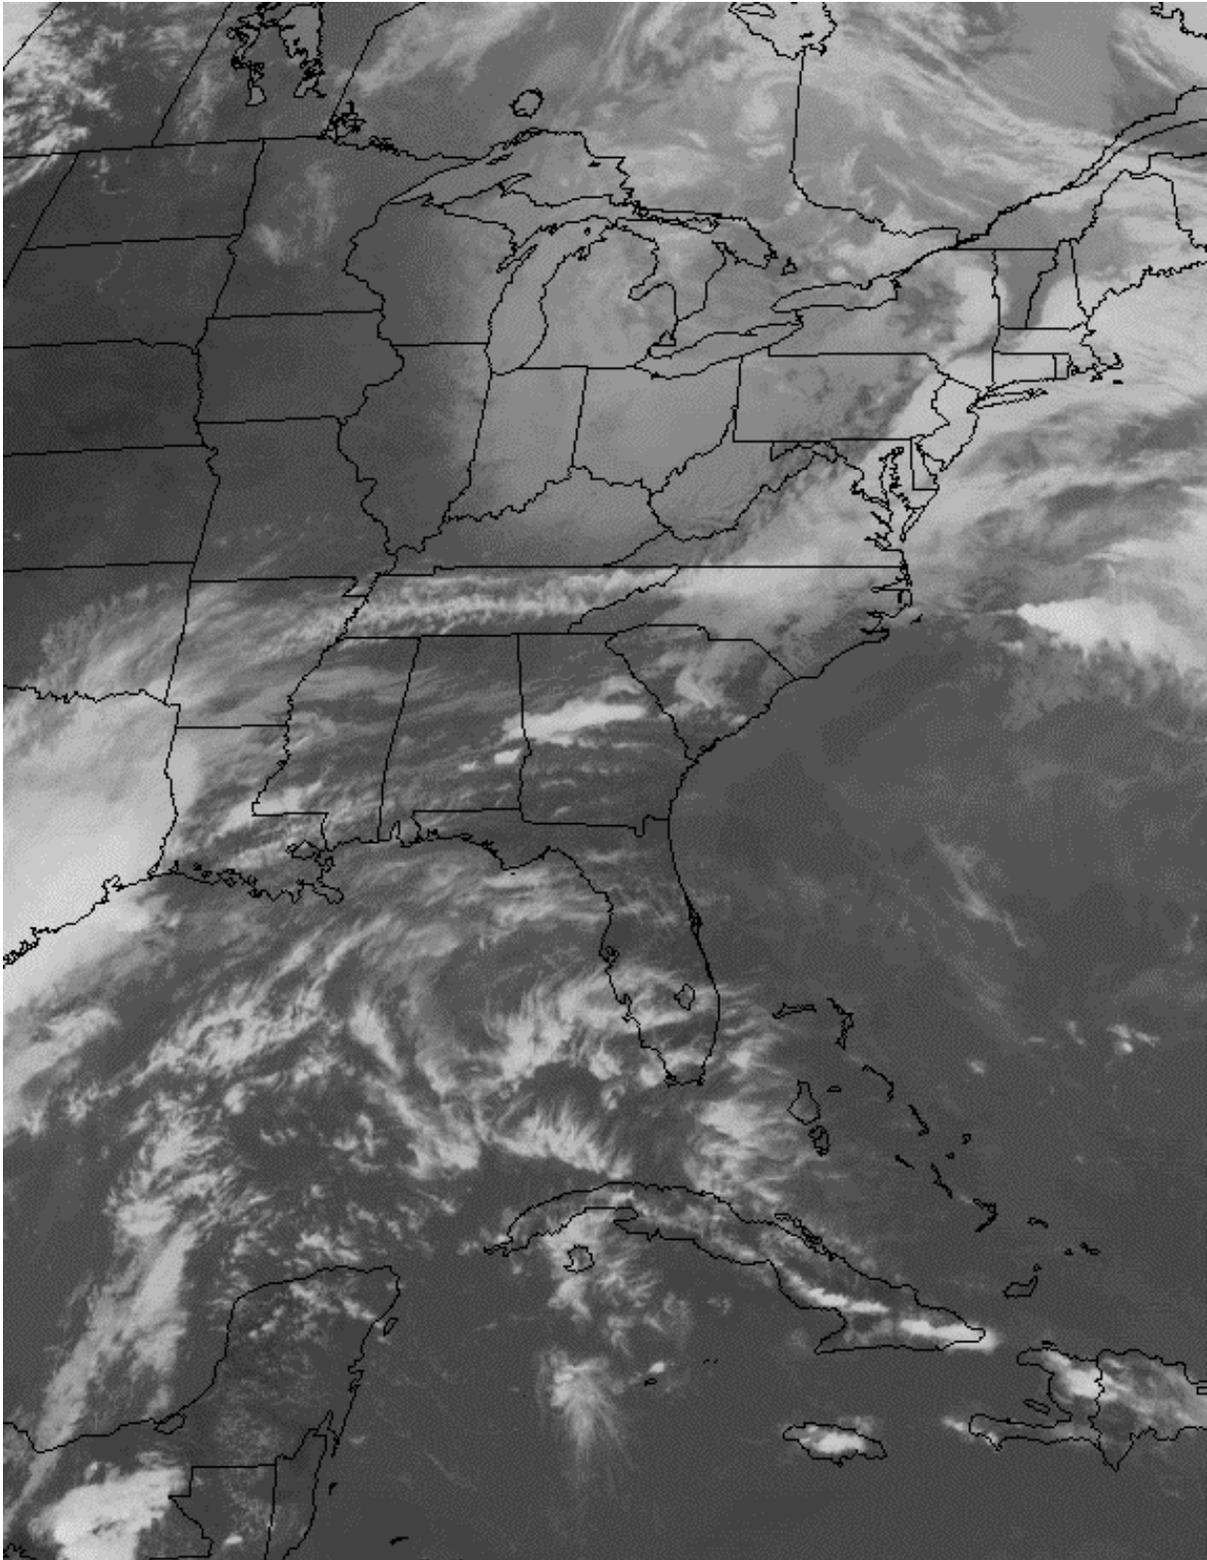


Figure 3-3. Infrared Satellite Imagery.

### RADIOSONDE ADDITIONAL DATA (RADATs)

Radiosonde Additional Data (RADATs) information is obtained from the radiosonde observations that are conducted twice a day at 00 and 12Z. The information contained in a RADAT is the observed freezing level and the relative humidity associated with the freezing level. The freezing level is the height above MSL at which the temperature is zero degrees Celsius.

The format associated with the RADAT is as follows:

Stn ID Time RADAT UU (D) (hhh)(hhh)(hhh)/(n)

Explanation:

Stn ID and Time - standard three-letter identifier and observation time in UTC.

RADAT - a contraction identifying the data as "freezing-level data."

UU - relative humidity at the freezing level in percent. When more than one level is identified, "UU" is the highest relative humidity observed at any of the levels transmitted.

(D) - a coded letter "L," "M," or "H." used in the event of multiple freezing levels to identify which level has the highest relative humidity, "L - lowest," "M - middle," "H - highest." This letter is omitted when only one level is coded.

(hhh) - height of the freezing level in hundreds of feet. Up to three freezing levels can be specified in the event of multiple freezing levels. If there are more than three freezing levels, the levels coded are the lowest, highest, and the intermediate level with the highest relative humidity.

(/n) - an indicator to show the number of freezing levels in addition to the three which are coded. The number is omitted when all observed freezing levels are coded (three or less.)

Examples:

#### **SJU 1200 RADAT 87160**

The San Juan, Puerto Rico, RADAT indicates that the freezing level was 16,000 feet MSL and the relative humidity was 87% at the freezing level.

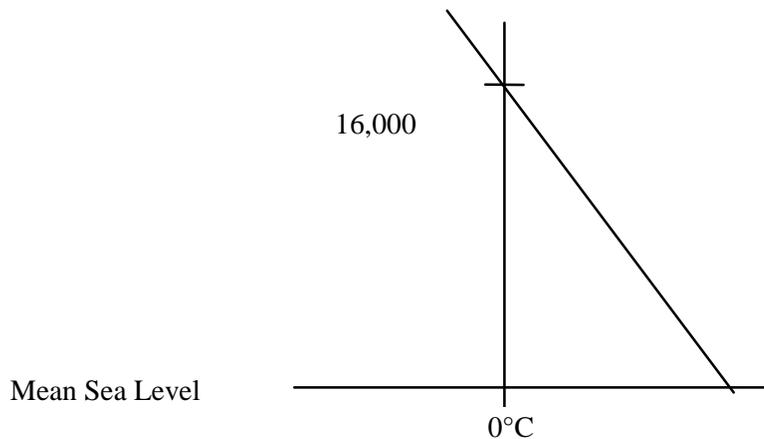


Figure 3-4. SJU RADAT.

**OUN 0000 RADAT 87L024105**

The Norman, Oklahoma, RADAT indicates that the freezing level was crossed twice. The two crossings occurred at 2,400 feet MSL and at 10,500 feet MSL. The 87L indicates that the relative humidity was 87% at the lowest crossing (indicated by the L).

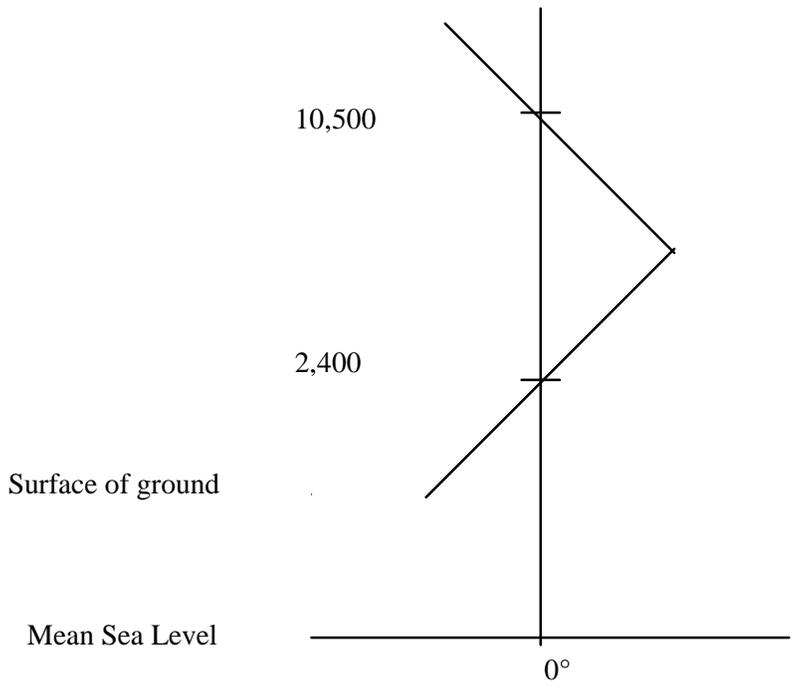


Figure 3-5. OUN RADAT.

**ALB 1200 RADAT 84M019045051**

The Albany, New York, RADAT indicates three crossings of the freezing level. The three crossings of the zero-degree Celsius isotherm occurred at 1,900 feet MSL, 4,500 feet MSL, and at 5,100 feet MSL. The relative humidity was 84% at the middle crossing which was 4,500 feet MSL.

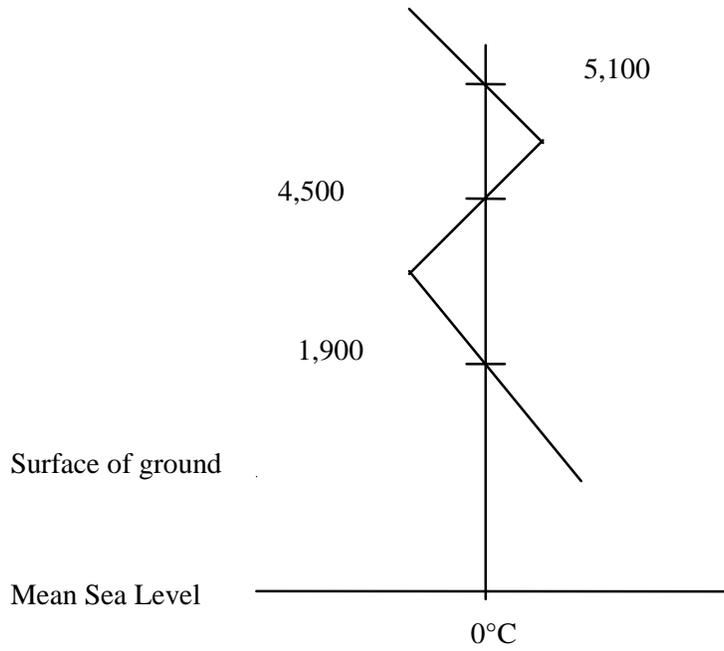


Figure 3-6. ALB RADAT.

**DNR 1200 RADAT ZERO**

The Denver, Colorado, RADAT indicates that the entire RADAT information was below zero degrees Celsius.

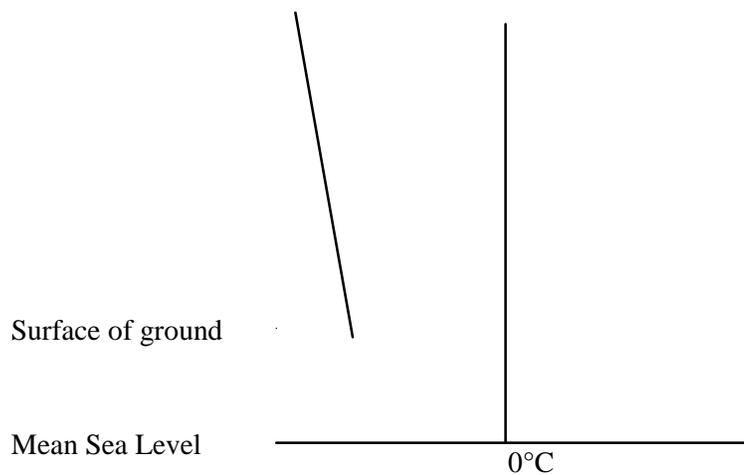


Figure 3-7. DEN RADAT.

December 1999

**ABR 0000 RADAT MISG**

The Aberdeen, South Dakota, RADAT was terminated before the first crossing of the zero-degree Celsius isotherm. All temperatures were above freezing.

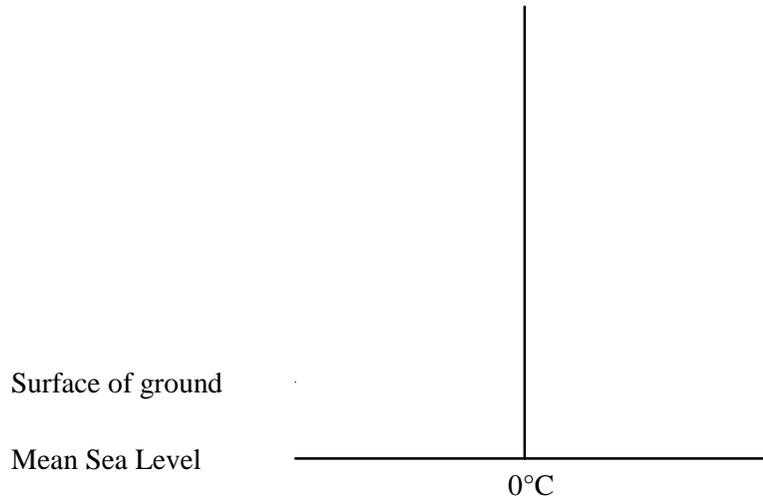


Figure 3-8. ABR RADAT.

## Section 4

### AVIATION WEATHER FORECASTS

Good flight planning involves considering all available weather information, including weather forecasts. This section explains the following aviation forecasts:

1. Aviation Terminal Forecast (TAF)
2. Aviation Area Forecast (FA)
3. Inflight Aviation Weather Advisories
4. Alaska, Gulf of Mexico, and International Area Forecasts (FAs)
5. Transcribed Weather Broadcasts (TWEB) Text Products
6. Winds and Temperatures Aloft Forecast (FD)
7. Center Weather Service Unit (CWSU) Products

Also discussed are the following general forecasts that may aid in flight planning:

1. Hurricane Advisory (WH)
2. Convective Outlook (AC)
3. Severe Weather Watch Bulletins (WW) and Alert Messages (AWW)

#### **AVIATION TERMINAL FORECAST (TAF)**

An Aviation Terminal Forecast (TAF) is a concise statement of the expected meteorological conditions within a 5-statute-mile radius from the center of an airport's runway complex during a 24-hour time period.

The TAFs use the same weather code found in METAR weather reports. Detailed explanations of the code are found only in Section 2.

The National Weather Service (NWS) requires an airport to have two consecutive METAR observations, not less than 30 minutes apart nor more than 1 hour apart, before a TAF will be issued. After the TAF has been issued, the forecaster will use all available weather data sources to maintain the TAF. If during this time a METAR is missing or part of the METAR is missing, the forecaster can use other weather sources to obtain the necessary data to maintain the TAF. However, if the forecaster feels that the other weather sources cannot provide the necessary information, the forecaster will discontinue the TAF.

A TAF contains the following elements in the order listed:

1. Type of report
2. ICAO station identifier
3. Date and time of origin
4. Valid period date and time
5. Wind forecast
6. Visibility forecast
7. Significant weather forecast
8. Sky condition forecast
9. Nonconvective low-level wind shear forecast (optional data)
10. Forecast change indicators
11. Probability forecast

December 1999

International and U.S. military TAFs also contain forecasts of maximum and minimum temperature, icing, and turbulence. These three elements are not included in NWS-prepared TAFs. For forecast icing and turbulence, see page 4-23, Inflight Aviation Weather Advisories.

The following paragraphs describe the elements in a TAF report. A sample report will accompany each element with the subject element in bold letters.

## TYPE OF REPORT

### TAF

```
KPIR 111140Z 111212 13012KT P6SM BKN100 WS020/35035KT TEMPO 1214 5SM BR
FM1500 16015G25KT P6SM SCT040 BKN250
FM0000 14012KT P6SM BKN080 OVC150 PROB40 0004 3SM TSRA BKN030CB
FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB
BECMG 0810 32007KT=
```

The report type header will always appear as the first element in the TAF. There are two types of TAF reports: a routine forecast, **TAF**; and an amended forecast, **TAF AMD**. An amended TAF is issued when the forecaster feels the TAF is not representative of the current or expected weather conditions. An equal sign at the end of the TAF signifies the end of the report.

## ICAO STATION IDENTIFIER

TAF

```
KPIR 111140Z 111212 13012KT P6SM BKN100 WS020/35035KT TEMPO 1214 5SM BR
FM1500 16015G25KT P6SM SCT040 BKN250
FM0000 14012KT P6SM BKN080 OVC150 PROB40 0004 3SM TSRA BKN030CB
FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB
BECMG 0810 32007KT=
```

The TAF code uses ICAO four-letter location identifiers as described in Section 2. TAF locations are in Figures 4-1, 4-2, 4-3, and 4-4 located on pages 4-13 through 4-16.

## DATE AND TIME OF ORIGIN

TAF

```
KPIR 111140Z 111212 13012KT P6SM BKN100 WS020/35035KT TEMPO 1214 5SM BR
FM1500 16015G25KT P6SM SCT040 BKN250
FM0000 14012KT P6SM BKN080 OVC150 PROB40 0004 3SM TSRA BKN030CB
FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB
BECMG 0810 32007KT=
```

This element is the date and universal coordinated time (UTC) the forecast is actually prepared. The format is a two-digit date and four-digit time followed without a space by the letter **Z**. Routine TAFs are prepared and filed approximately one-half hour prior to scheduled issuance times.

Examples:

111140Z Forecast prepared on the eleventh day of the month at 1140Z.  
050530Z Forecast prepared on the fifth day of the month at 0530Z.

**VALID PERIOD DATE AND TIME**

## TAF

KPIR 111140Z **111212** 13012KT P6SM BKN100 WS020/35035KT TEMPO 1214 5SM BR  
 FM1500 16015G25KT P6SM SCT040 BKN250  
 FM0000 14012KT P6SM BKN080 OVC150 PROB40 0004 3SM TSRA BKN030CB  
 FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB  
 BECMG 0810 32007KT=

The valid period of the forecast is a two-digit date followed by the two-digit beginning and two-digit ending hours in UTC. Routine TAFs are valid for 24 hours and are issued four times daily at 0000Z, 0600Z, 1200Z, and 1800Z. All ending times throughout the TAF of 00Z are indicated by the number 24.

## Examples:

111212 Forecast valid from the eleventh at 12Z to the twelfth at 12Z.  
 300024 Forecast valid from the thirtieth at 00Z to the first at 00Z.

Amended, canceled, or delayed forecasts may have valid periods less than 24 hours.

## Examples:

231512 Forecast valid from the twenty-third at 15Z to the twenty-fourth at 12Z.  
 091006 Forecast valid from the ninth at 10Z to the tenth at 06Z.

For airports with less than 24-hour observational coverage for which part-time terminal forecasts are provided, the TAF will be valid until the end of the scheduled forecast even if the observations have ceased before that time. **AMD NOT SKED** (amendment not scheduled) or **NIL AMD** (no amendment) will be issued after the forecast information. **AMD NOT SKED AFT (closing time)Z** (amendment not scheduled after [closing time]Z) will be used if the times of the observations are known and judged reliable. During the time the station is closed and a TAF is issued, there will be no forecast as indicated by **NIL** (no TAF) after the valid date and time group. Only after two METARs observations have been disseminated will a TAF be issued. **AMD LTD TO CLD VIS AND WIND** (amendment limited to clouds, visibility, and wind) is used at observation sites that have part-time manual augmentation. This remark means that there will be amendments only for clouds, visibility, and wind. There will be no amendments for thunderstorms or freezing/frozen precipitation.

**WIND FORECAST**

## TAF

KPIR 111140Z 111212 **13012KT** P6SM BKN100 WS020/35035KT TEMPO 1214 5SM BR  
 FM1500 16015G25KT P6SM SCT040 BKN250  
 FM0000 14012KT P6SM BKN080 OVC150 PROB40 0004 3SM TSRA BKN030CB  
 FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB  
 BECMG 0810 32007KT=

The surface wind forecast is the wind direction in degrees from true north (first three digits) and mean speed in knots (last two or three digits if 100 knots or greater). The contraction, **KT**, denotes the units of wind speed in knots. Wind gusts are noted by the letter **G** appended to the mean wind speed followed by the highest expected gust (two or three digits if 100 knots or greater). Calm winds are encoded as **0000KT**. A variable wind is encoded as **VRB** when wind direction fluctuates due to convective activity or low wind speeds (3 knots or less).

December 1999

Examples:

13012KT, 18010KT, 35012G26KT, or VRB16G28KT

## VISIBILITY FORECAST

TAF

KPIR 111140Z 111212 13012KT **P6SM** BKN100 WS020/35035KT TEMPO 1214 5SM BR  
FM1500 16015G25KT P6SM SCT040 BKN250  
FM0000 14012KT P6SM BKN080 OVC150 PROB40 0004 3SM TSRA BKN030CB  
FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB  
BECMG 0810 32007KT=

The prevailing visibility is forecasted in whole and fractions of statute miles followed by **SM** to note the units of measurement. Statute miles followed by fractions of statute miles are separated with a space ; for example, 1 1/2SM. Forecasted visibility greater than 6 statute miles is indicated by coding **P6SM**. If prevailing visibility is 6 statute miles or less, one or more weather phenomena must be included in the significant weather forecast. If volcanic ash is forecasted, the visibility must also be forecasted even if the visibility is greater than 6 statute miles. Sector or variable visibility is not forecasted.

Examples:

1/2SM, 2 1/4SM, 5SM, or P6SM

## SIGNIFICANT WEATHER FORECAST

TAF

KPIR 111140Z 111212 13012KT P6SM BKN100 WS020/35035KT TEMPO 1214 5SM BR  
FM1500 16015G25KT P6SM SCT040 BKN250  
FM0000 14012KT P6SM BKN080 OVC150 PROB40 0004 3SM **TSRA** BKN030CB  
FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB  
BECMG 0810 32007KT=

The expected weather phenomenon or phenomena are coded in TAF reports using the same format, qualifiers, and phenomena contractions as METAR reports (except UP). (See Section 2.)

Obscurations to vision will be forecasted whenever the prevailing visibility is forecasted to be 6 statute miles or less. Precipitation and volcanic ash will always be included in the TAF regardless of the visibility forecasted.

Examples:

FM2200 18005KT 1SM BR SKC  
FM0100 12010KT P6SM -RA BKN020  
FM1500 22015KT P6SM VA SCT100

If no significant weather is expected to occur during a specific time period in the forecast, the weather group is omitted for that time period. However, if after a time period in which significant weather has been forecasted, a change to a forecast of “no significant weather” occurs, the contraction **NSW** (no significant weather) will appear as the weather included in BECMG or TEMPO groups. NSW will not be used in the initial time period of a TAF or in FM groups.

Example:

FM0600 16010KT 3SM RA BKN030 BECMG 0810 P6SM NSW

If the forecaster determines that in the vicinity of the airport there could be weather that impacts aviation, the forecaster will include those conditions after the weather group. The letters **VC** describe conditions that will occur within the vicinity of an airport (5-10 SM) and will be used only with fog, showers, or thunderstorms (FG, SH, or TS).

Examples:

P6SM VCFG - fog in the vicinity.

5SM BR VCSH - showers in the vicinity .

P6SM VCTS - thunderstorms in the vicinity.

## SKY CONDITION FORECAST

TAF

KPIR 111140Z 111212 13012KT P6SM**BKN100** WS020/35035KT TEMPO 1214 5SM BR  
 FM1500 16015G25KT P6SM SCT040 BKN250  
 FM0000 14012KT P6SM BKN080 OVC150 PROB40 0004 3SM TSRA BKN030CB  
 FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB  
 BECMG 0810 32007KT=

TAF sky condition forecasts use the METAR format described in Section 2. Cumulonimbus clouds (**CB**) are the only cloud type forecasted in TAFs.

Examples:

BKN100, SCT040 BKN030CB, or FEW008 BKN015

When the sky is obscured due to a surface-based phenomenon, vertical visibility (**VV**) into the obscuration is forecasted. The format for vertical visibility is **VV** followed by a three-digit height in hundreds of feet. Partial obscurations are not forecasted. Remember a ceiling is the lowest broken or overcast layer or vertical visibility.

Example:

VV008

## NONCONVECTIVE LOW-LEVEL WIND SHEAR FORECAST (OPTIONAL DATA)

TAF

KPIR 111140Z 111212 13012KT P6SM BKN100**WS020/35035KT** TEMPO 1214 5SM BR  
 FM1500 16015G25KT P6SM SCT040 BKN250  
 FM0000 14012KT P6SM BKN080 OVC150 PROB40 0004 3SM TSRA BKN030CB  
 FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB  
 BECMG 0810 32007KT=

A forecast of nonconvective low-level wind shear is included immediately after the cloud and obscuration group when wind shear criteria have been or will be met. The forecast includes the height of the wind shear followed by the wind direction and wind speed at the indicated height. Height is given in hundreds of feet above ground level (AGL) up to and including 2,000 feet. Wind shear is encoded with the contraction **WS**, followed by a three-digit height, solidus (/), and winds at the height indicated in the same format as surface winds. The wind shear element is omitted if not expected to occur.

December 1999

Example:

WS020/36035KT

## FORECAST CHANGE INDICATORS

TAF

KPIR 111140Z 111212 13012KT P6SM BKN100 WS020/35035KT**TEMPO 1214** 5SM BR  
**FM1500** 16015G25KT P6SM SCT040 BKN250  
FM0000 14012KT P6SM BKN080 OVC150 PROB40 0004 3SM TSRA BKN030CB  
FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB  
**BECMG 0810** 32007KT=

If a significant change in any of the elements is expected during the valid period, a new time period with the changes is included. The following change indicators are used when either a rapid, gradual, or temporary change is expected in some or all of the forecasted meteorological conditions.

### From (FM) Group

The **FM** group is used when a rapid and significant change, usually occurring in less than 1 hour, in prevailing conditions is expected. Appended to the FM indicator is the four-digit hour and minute the change is expected to begin. The forecast is valid until the next change group or until the end of the current forecast.

The FM group will mark the beginning of a new line in a TAF report. Each FM group shall contain a forecast of wind, visibility, weather (if significant), sky condition, and wind shear (if warranted). FM groups will not include the contraction NSW.

Examples:

FM1500 16015G25KT P6SM SCT040 BKN250  
FM0200 32010KT 3SM TSRA FEW010 BKN030CB

### Becoming (BECMG) Group

The **BECMG** group is used when a gradual change in conditions is expected over a period not to exceed 2 hours. The time period when the change is expected to occur is a four-digit group containing the beginning and ending hours of the change that follows the BECMG indicator. The gradual change will occur at an unspecified time within the time period. Only the changing forecasted meteorological conditions are included in **BECMG** groups. Omitted conditions are carried over from the previous time group.

Example:

FM2000 18020KT P6SM BKN030 BECMG 0103 OVC015

This BECMG group describes a gradual change in sky condition from BKN030 to OVC015. The change in sky conditions occurs between 01Z and 03Z. Refer back to the FM2000 group for the wind and visibility conditions. The forecast after 03Z will be: 18020KT P6SM OVC015.

Example:

```
FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB
BECMG 0810 32007KT=
```

This BECMG group describes a gradual change in wind direction only beginning between 08Z and 10Z. Refer back to the previous forecast group, in this case the FM0400 group, for the prevailing visibility, weather, and sky conditions. The forecast after 10Z will be: 32007KT P6SM SCT040 OVC080.

### Temporary (TEMPO) Group

The **TEMPO** group is used for temporary fluctuations of wind, visibility, weather, or sky condition that are expected to last for generally less than an hour at a time (occasional), and expected to occur during less than half the time period. The **TEMPO** indicator is followed by a four-digit group giving the beginning and ending hours of the time period during which the temporary conditions are expected. Only the changing forecasted meteorological conditions are included in **TEMPO** groups. The omitted conditions are carried over from the previous time group.

Example:

```
FM1000 27005KT P6SM SKC TEMPO 1216 3SM BR
```

This temporary group describes visibility and weather between 12Z and 16Z. The winds and sky condition have been omitted. Go back to the previous forecast group, FM1000, to obtain the wind and sky condition forecast. The forecast between 12Z and 16Z is: 27005KT 3SM BR SKC.

Example:

```
FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB
BECMG 0810 32007KT=
```

This temporary group describes visibility, weather, and sky condition between 04Z and 08Z. The winds have been omitted. Go back to the previous forecast group, FM0400, to obtain the wind forecast. The forecast between 04Z and 08Z is: 14008KT 3SM TSRA OVC030CB.

### PROBABILITY (PROB30 or PROB40) FORECAST

TAF

```
KPIR 111140Z 111212 13012KT P6SM BKN100 WS020/35035KT TEMPO 1214 5SM BR
FM1500 16015G25KT P6SM SCT040 BKN250
FM0000 14012KT P6SM BKN080 OVC150 PROB40 0004 3SM TSRA BKN030CB
FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB
BECMG 0810 32007KT=
```

The probability forecast describes the probability or chance of thunderstorms or other precipitation events occurring, along with associated weather conditions (wind, visibility, and sky conditions). The probability forecast will not be used in the first 6 hours of the TAF.

The **PROB30** or **PROB40** group is used when the occurrence of thunderstorms or precipitation is in the 30% to less than 40% or 40% to less than 50% range, respectively. If the thunderstorms or precipitation chance is greater than 50%, it is considered a prevailing weather condition and is included in the significant weather section or the TEMPO change indicator group. **PROB30** or **PROB40** is followed by a four-digit time group giving the beginning and ending hours of the time period during which the thunderstorms or precipitation is expected.

December 1999

Example:

FM0600 0915KT P6SM BKN020 PROB30 1014 1SM RA BKN015

This example depicts a 30% to less than 40% chance of 1 statute mile, moderate rain, and a broken cloud layer (ceiling) at 1,500 feet between the hours of 10-14Z.

Example:

FM0000 14012KT P6SM BKN080 OVC150 PROB40 0004 3SM TSRA BKN030CB

In this example, there is a 40% to <50% chance of visibility 3 statute miles, thunderstorms with moderate rain showers, and a broken cloud layer (ceiling) at 3,000 feet with cumulonimbus between the hours of 00-04Z.

**EXAMPLES OF TAF REPORTS****TAF**

**KPIR 111140Z 111212 13012KT P6SM BKN100 WS020/35035KT TEMPO 1214 5SM BR  
 FM1500 16015G25KT P6SM SCT040 BKN250  
 FM0000 14012KT P6SM BKN080 OVC150 PROB40 0004 3SM TSRA BKN030CB  
 FM0400 14008KT P6SM SCT040 OVC080 TEMPO 0408 3SM TSRA OVC030CB  
 BECMG 0810 32007KT=**

<b>TAF</b>	Aviation terminal forecast
<b>KPIR</b>	Pierre, South Dakota
<b>111140Z</b>	prepared on the 11 <sup>th</sup> at 1140Z
<b>111212</b>	valid period from the 11 <sup>th</sup> at 1200Z until the 12 <sup>th</sup> at 1200Z
<b>13012KT</b>	wind 130 at 12 knots
<b>P6SM</b>	visibility greater than 6 statute miles
<b>BKN100</b>	ceiling 10,000 broken
<b>WS020/35035KT</b>	wind shear at 2,000 feet, wind (at 2,000 feet) from 350 at 35 knots
<b>TEMPO 1214</b>	temporary conditions between 1200Z and 1400Z
<b>5SM</b>	visibility 5 statute miles
<b>BR</b>	mist
<b>FM1500</b>	from 1500Z
<b>16015G25KT</b>	wind 160 at 15 knots gusting to 25 knots
<b>P6SM</b>	visibility greater than 6 statute miles
<b>SCT040 BKN250</b>	4,000 scattered, ceiling 25,000 broken
<b>FM0000</b>	from 0000Z
<b>14012KT</b>	wind 140 at 12 knots
<b>P6SM</b>	visibility greater than 6 statute miles
<b>BKN080 OVC150</b>	ceiling 8,000 broken, 15,000 overcast
<b>PROB40 0004</b>	40% probability between 0000Z and 0400Z
<b>3SM</b>	visibility 3 statute miles
<b>TSRA</b>	thunderstorm with moderate rain showers
<b>BKN030CB</b>	ceiling 3,000 broken with cumulonimbus
<b>FM0400</b>	from 0400Z
<b>14008KT</b>	wind 140 at 8 knots
<b>P6SM</b>	visibility greater than 6 statute miles
<b>SCT040 OVC080</b>	4,000 scattered, ceiling 8,000 overcast
<b>TEMPO 0408</b>	temporary conditions between 0400Z and 0800Z
<b>3SM</b>	visibility 3 statute miles
<b>TSRA</b>	thunderstorms with moderate rain showers
<b>OVC030CB</b>	ceiling 3,000 overcast with cumulonimbus
<b>BECMG 0810</b>	becoming between 0800Z and 1000Z
<b>32007KT=</b>	wind 320 at 7 knots; the equal sign signifies the end of the TAF

December 1999

**TAF AMD**

**KEYW 131555Z 131612 VRB03KT P6SM VCTS SCT025CB BKN250 TEMPO 1618 2SM TSRA  
BKN020CB  
FM1800 VRB03KT P6SM SCT025 BKN250 TEMPO 2024 1SM TSRA OVC010CB  
FM0000 VRB03KT P6SM VCTS SCT020CB BKN120 TEMPO 0812 BKN020CB=**

**TAF AMD**

**KEYW**

**131555Z**

**131612**

**VRB03KT**

**P6SM**

**VCTS**

**SCT025CB BKN250**

**TEMPO 1618**

**2SM**

**TSRA**

**BKN020CB**

**FM1800**

**VRB03KT**

**P6SM**

**SCT025 BKN250**

**TEMPO 2024**

**1SM**

**TSRA**

**OVC010CB**

**FM0000**

**VRB03KT**

**P6SM**

**VCTS**

**SCT020CB BKN120**

**TEMPO 0812**

**BKN020CB=**

the

Amended aviation terminal forecast

Key West, Florida

prepared on the 13<sup>th</sup> at 1555Z

valid period from the 13<sup>th</sup> at 1600Z until the 14<sup>th</sup> at 1200Z

wind variable at 3 knots

visibility greater than 6 statute miles

thunderstorms in the vicinity

2,500 scattered with cumulonimbus, ceiling 25,000 broken

temporary conditions between 1600Z and 1800Z

visibility 2 statute miles

thunderstorms with moderate rain showers

ceiling 2,000 broken with cumulonimbus

from 1800Z

wind variable at 3 knots

visibility greater than 6 statute miles

2,500 scattered, ceiling 25,000 broken

temporary conditions between 2000Z and 0000Z

visibility 1 statute mile

thunderstorms with moderate rain showers

ceiling 1,000 overcast with cumulonimbus

from 0000Z

variable wind at 3 knots

visibility greater than 6 statute miles

thunderstorms in the vicinity

2,000 scattered with cumulonimbus, ceiling 12,000 broken

temporary conditions between 0800Z and 1200Z

ceiling 2,000 broken with cumulonimbus; the equal sign signifies the end of

TAF

**TAF**

**KCRP 111730Z 111818 19007KT P6SM SCT030 TEMPO 1820 BKN040  
 FM2000 16011KT P6SM VCTS FEW030CB SCT250  
 FM0200 14006KT P6SM FEW025 SCT250  
 FM0800 VRB03KT 5SM BR SCT012 TEMPO 1012 1/2SM FG BKN001  
 FM1500 17007KT P6SM SCT025=**

<b>TAF</b>	Aviation terminal forecast
<b>KCRP</b>	Corpus Christi, Texas
<b>111730Z</b>	prepared on the 11 <sup>th</sup> at 1730Z
<b>111818</b>	valid period from the 11 <sup>th</sup> at 1800Z until the 12 <sup>th</sup> at 1800Z
<b>19007KT</b>	wind 190 at 7 knots
<b>P6SM</b>	visibility greater than 6 statute miles
<b>SCT030</b>	3,000 scattered
<b>TEMPO 1820</b>	temporary conditions between 1800Z and 2000Z
<b>BKN040</b>	ceiling 4,000 broken
<b>FM2000</b>	from 2000Z
<b>16011KT</b>	wind 160 at 11 knots
<b>P6SM</b>	visibility greater than 6 statute miles
<b>VCTS</b>	thunderstorms in the vicinity
<b>FEW030CB SCT250</b>	3,000 few with cumulonimbus, 25,000 scattered
<b>FM0200</b>	from 0200Z
<b>14006KT</b>	wind 140 at 6 knots
<b>P6SM</b>	visibility greater than 6 statute miles
<b>FEW025 SCT250</b>	2,500 few, 25,000 scattered
<b>FM0800</b>	from 0800Z
<b>VRB03KT</b>	wind variable at 3 knots
<b>5SM</b>	visibility 5 statute miles
<b>BR</b>	mist
<b>SCT012</b>	1,200 scattered
<b>TEMPO 1012</b>	temporary conditions between 1000Z and 1200Z
<b>1/2SM</b>	visibility ½ statute mile
<b>FG</b>	fog
<b>BKN001</b>	ceiling 100 broken
<b>FM1500</b>	from 1500Z
<b>17007KT</b>	wind 170 at 7 knots
<b>P6SM</b>	visibility greater than 6 statute miles
<b>SCT025=</b>	2,500 scattered; the equal sign signifies the end of the TAF

December 1999

**TAF**

**KACK 112340Z 120024 29008KT P6SM SKC BECMG 1618 22015KT=**

**TAF**

**KACK**

**112340Z**

**120024**

**29008KT**

**P6SM**

**SKC**

**BECMG 1618**

**22015KT=**

Aviation terminal forecast

Nantucket, Massachusetts

prepared on the 11<sup>th</sup> at 2340Z

valid period from the 12<sup>th</sup> at 0000Z until the 13<sup>th</sup> at 0000Z

wind 290 at 8 knots

visibility greater than 6 statute miles

sky clear

becoming between 1600Z and 1800Z

wind 220 at 15 knots; the equal sign signifies the end of the TAF

**TAF**

**KMWH 200535Z 200606 NIL=**

**TAF**

**KMWH**

**200535Z**

**200606**

**NIL=**

Aviation terminal forecast

Moses Lake, Washington

prepared on the 20<sup>th</sup> at 0535Z

valid period from the 20<sup>th</sup> at 0600Z to the 21<sup>st</sup> at 0600Z

no TAF; the equal sign signifies the end of the TAF



Figure 4-1. TAF Locations - Western Contiguous United States.



Figure 4-2. TAF Locations - Eastern Contiguous United States.

### GUAM



### PUERTO RICO AND THE VIRGIN ISLANDS

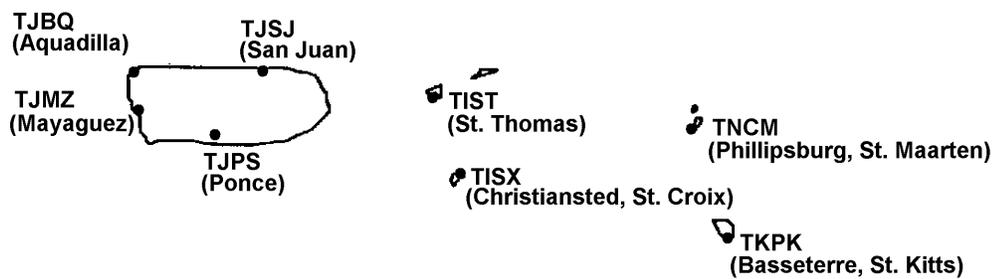


Figure 4-3. TAF Locations - Guam and Puerto Rico.



**AVIATION AREA FORECAST (FA)**

An Aviation Area Forecast (FA) is a forecast of visual meteorological conditions (VMC), clouds, and general weather conditions over an area the size of several states. To understand the complete weather picture, the FA must be used in conjunction with the inflight aviation weather advisories. Together, they are used to determine forecast en route weather and to interpolate conditions at airports for which no TAFs are issued. Figure 4-5 on page 4-21 maps the FA areas. The FAs are issued 3 times a day by the Aviation Weather Center (AWC) in Kansas City, Missouri, for each of the 6 areas in the contiguous 48 states. The weather forecast office (WFO) in Honolulu issues FAs for Hawaii as shown in Figure 4-6 on page 4-22. Alaska FA information is on page 4-27. There are also two specialized FAs, one for the Gulf of Mexico and one for international airspace.

This is a partial example of an FA which will be used in this section:

DFWC FA 120945

SYNOPSIS AND VFR CLDS/WX

SYNOPSIS VALID UNTIL 130400

CLDS/WX VALID UNTIL 122200...OTLK VALID 122200-130400 OK TX AR TN LA MS AL AND  
CSTL WTRS

.  
SEE AIRMET SIERRA FOR IFR CONDS AND MTN OBSCN.  
TS IMPLY SEV OR GTR TURB SEV ICE LLWS AND IFR CONDS.  
NON MSL HGTS DENOTED BY AGL OR CIG.

.  
SYNOPSIS...LOW PRES TROF 10Z OK/TX PNHDL AREA FCST MOV EWD INTO CNTRL-SWRN  
OK BY 04Z. WRMFNT 10Z CNTRL OK-SRN AR-NRN MS FCST LIFT NWD INTO NERN OK-  
NRN AR XTRM NRN MS BY 04Z.

.  
S CNTRL AND SERN TX

AGL SCT-BKN010. TOPS 030. VIS 3-5SM BR. 14-16Z BECMG AGL SCT030. 19Z AGL SCT050.  
OTLK...VFR.

.  
OK

PNHDL AND NW...AGL SCT030 SCT-BKN100. TOPS FL200. 15Z AGL SCT040 SCT100. AFT 20Z  
SCT TSRA DVLPG..FEW POSS SEV. CB TOPS FL450. OTLK...VFR.

SWRN OK...CIG BKN020. TOPS 050. VIS 3-5SM BR. 14Z AGL SCT-BKN040. 18Z CIG BKN060.

TOPS FL180. 22Z SCT TSRA DVLPG..FEW POSS SEV. CB TOPS ABV FL450. OTLK...VFR.

NERN QTR...CIG BKN020 OVC050. VIS 3-5SM NMRS TSRA.FEW POSS SEV. CB TOPS ABV

FL450. 15Z AGL SCT030 SCT-BKN100. TOPS FL250. 18Z AGL SCT040. OTLK...VFR.

SERN QTR...AGL SCT-BKN020. TOPS 050. 18Z AGL SCT040. OTLK...VFR.

.  
CSTL WTRS

LA MS AL WTRS...SCT025 SCT-BKN080. TOPS 150. ISOL -TSRA. CB TOPS FL350. OTLK...VFR.

TX WTRS...SCT CI. OCNL SCT030. OTLK...VFR. ....

December 1999

The FA is comprised of four sections: a communications and product header section, a precautionary statements section, and two weather sections - a synopsis section and a visual flight rules (VFR) clouds/weather section.

## COMMUNICATIONS AND PRODUCT HEADER

The communications and product header identifies the office for which the FA is issued, the date and time of issue, the product name, the valid times, and the states and/or areas covered by the FA. The following shows the communications and product header for the example FA shown on page 4-17:

```
DFWC FA 120945  
SYNOPSIS AND VFR CLDS/WX  
SYNOPSIS VALID UNTIL 130400  
CLDS/WX VALID UNTIL 122200...OTLK VALID 122200-130400 OK TX AR TN LA MS AL AND  
CSTL WTRS
```

In the first line, “DFW” indicates the area for which the FA is valid. The “C” indicates VFR clouds and weather while the FA indicates what type of forecast message it is. The “120945” indicates the date and time the FA was issued. The next line “SYNOPSIS AND VFR CLDS/WX” states what information is contained in this forecast message. “SYNOPSIS VALID UNTIL 130400” means the synopsis section of the FA is valid until the thirteenth at 0400Z. The “CLDS/WX VALID UNTIL 122200...OTLK VALID 122200-130400” statement indicates the forecast section is valid until the twelfth at 2200Z, while the outlook portion is valid from the twelfth at 2200Z until the thirteenth at 0400Z. “OK TX AR TN LA MS AL AND CSTL WTRS” describes the area for which this FA forecast is valid.

## PRECAUTIONARY STATEMENTS

Between the communications/product header and the body of the forecast are three precautionary statements. (See example FA on page 4-17.) The first statement in the example, “SEE AIRMET SIERRA FOR IFR CONDS AND MTN OBSCN,” is included to alert users that IFR conditions and/or mountain obscurations may be occurring or may be forecasted to occur in a portion of the FA area. The user shall always check the latest AIRMET Sierra for the FA area.

The second statement in the example, “TS IMPLY SEV OR GTR TURB SEV ICE LLWS AND IFR CONDS,” is included as a reminder of the hazards existing in all thunderstorms. Thus, these thunderstorm-associated hazards are not spelled out within the body of the FA.

The purpose of the third statement in the example, “NON MSL HGTS DENOTED BY AGL OR CIG,” is to alert the user that heights, for the most part, are mean sea level (MSL). All heights are in hundreds of feet. For example, “BKN030. TOPS 100. HYR TRRN OBSCD,” means bases of the broken clouds are 3,000 feet MSL with tops 10,000 feet MSL. Terrain above 3,000 feet MSL will be obscured. The tops of the clouds, turbulence, icing, and freezing level heights are always MSL.

Heights AGL are noted in either of two ways:

1. Ceilings by definition are above ground. Therefore, the contraction “CIG” indicates above ground. For example, ‘CIG BKN-OVC015,’ means that ceilings are expected to be broken to overcast sky cover with bases at 1,500 feet AGL.
2. The contraction “AGL” means above ground level. Therefore, “AGL SCT020” means scattered clouds with bases 2,000 feet AGL.

Thus, if the contraction “AGL” or “CIG” is not denoted, height is automatically above MSL.

## SYNOPSIS

The synopsis is a brief summary of the location and movements of fronts, pressure systems, and other circulation features for an 18-hour period. References to low ceilings and/or visibilities, strong winds, or any other phenomena the forecaster considers useful may also be included. The following synopsis is taken from the example on page 4-17.

SYNOPSIS...LOW PRES TROF 10Z OK/TX PNHDL AREA FCST MOV EWD INTO CNTRL-SWRN OK BY 04Z. WRMFNT 10Z CNTRL OK-SRN AR-NRN MS FCST LIFT NWD INTO NERN OK-NRN AR XTRM NRN MS BY 04Z.

This paragraph states that a low pressure trough at 10Z was over the Oklahoma (OK)/Texas (TX) panhandle area. The area is forecasted to move eastward into central-southwestern OK by 04Z. At 10Z a warm front was located from central OK to southern Arkansas (AR) to northern Mississippi (MS). This warm front is forecasted to lift into northeastern OK, northern AR, to extreme northern MS by 04Z.

## VFR CLOUDS AND WEATHER (VFR CLDS/WX)

This section contains a 12-hour specific forecast, followed by a 6-hour categorical outlook giving a total forecast period of 18 hours, and it is usually several paragraphs in length. The breakdown may be by states or by well-known geographical areas. (See Figure 4-11.) The specific forecast section gives a general description of clouds and weather which cover an area greater than 3,000 square miles and are significant to VFR flight operations.

Surface visibility and obstructions to vision are included when the forecast visibility is 3 to 5 statute miles. Precipitation, thunderstorms, and sustained winds of 20 knots or more will always be included when forecasted. The conditional term OCNL (occasional) is used to describe clouds and visibilities that may affect VFR flights. It is used when there is a greater than 50% probability of a phenomenon occurring, but for less than ½ the forecast period. The areal coverage terms ISOL (isolated), WDLY SCT (widely scattered), SCT or AREAS (scattered), and NMRS or WDSPRD (numerous or widespread) are used to indicate the area coverage of thunderstorms or showers. The term ISOL may also be used to describe areas of ceilings or visibilities that are expected to affect areas less than 3,000 square miles. Table 4-1 defines the areal coverage terms.

**Table 4-1 Areal Coverage of Showers and Thunderstorms**

<b>Terms</b>	<b>Coverage</b>
<b>Isolated (ISOL)</b>	<b>Single cells (no percentage)</b>
<b>Widely scattered (WDLY SCT)</b>	<b>Less than 25% of area affected</b>
<b>Scattered or Areas (SCT or AREAS)</b>	<b>25 to 54% of area affected</b>
<b>Numerous or Widespread (NMRS or WDSPRD)</b>	<b>55% or more of area affected</b>

December 1999

Example from the FA on page 4-17:

CSTL WTRS

LA MS AL WTRS...SCT025 SCT-BKN080. TOPS 150. ISOL -TSRA. CB TOPS FL350. OTLK...VFR  
TX WTRS...SCT CI. OCNL SCT030. OTLK...VFR. ....

This part of the VFR clouds/weather section is the forecast for the coastal waters of Louisiana (LA), Mississippi (MS), Alabama (AL), and Texas (TX). For the coastal waters of LA, MS, and AL, the base of the scattered layer is 2,500 feet MSL. The second layer is scattered to broken at 8,000 feet MSL with tops at 15,000 feet MSL. Also during this time, isolated (ISOL) thunderstorms with light rain showers are expected with the tops of the thunderstorms (CB) at flight level (FL) 350. FL is used only for altitudes 18,000 feet MSL and higher. The visibility is expected to be greater than 6 statute miles and winds less than 20 knots, both by omission. The weather conditions along the TX coastal waters are expected to be scattered cirrus with occasional (OCNL) scattered layers at 3,000 feet MSL.

A categorical outlook, identified by "OTLK," is included for each area breakdown. A categorical outlook of instrument flight rules (IFR) and marginal VFR (MVFR) can be due to ceilings only (CIG), restriction to visibility only (TSRA, FG, etc.), or a combination of both. In the example, the coastal areas have outlooks of VFR conditions.

The statement, "OTLK...VFR BCMG MVFR CIG F AFT 09Z," means the weather is expected to be VFR, becoming MVFR due to low ceiling, and visibilities restricted by fog after 0900Z. "WND" is included in the outlook if winds, sustained or gusty, are expected to be 20 knots or greater.

**Hazardous weather (i.e., IFR, icing, and turbulence conditions) is not included in the FA but are included in the Inflight Aviation Weather Advisories (see page 4-23).**

#### **AMENDED AVIATION AREA FORECAST**

Amendments to the FA are issued as needed. An amended FA is identified by **AMD** that is located on the first line after the date and time. The entire FA is transmitted again with the word **UPDT** after the state to indicated what sections have been amended/updated. FAs are also amended and updated by inflight aviation weather advisories (AIRMETs, SIGMETs, and Convective SIGMETs). A corrected FA is identified by **COR** and a delayed FA is identified by **RTD** which are located in the first line after the time and date.

**AVIATION AREA FORECASTS**


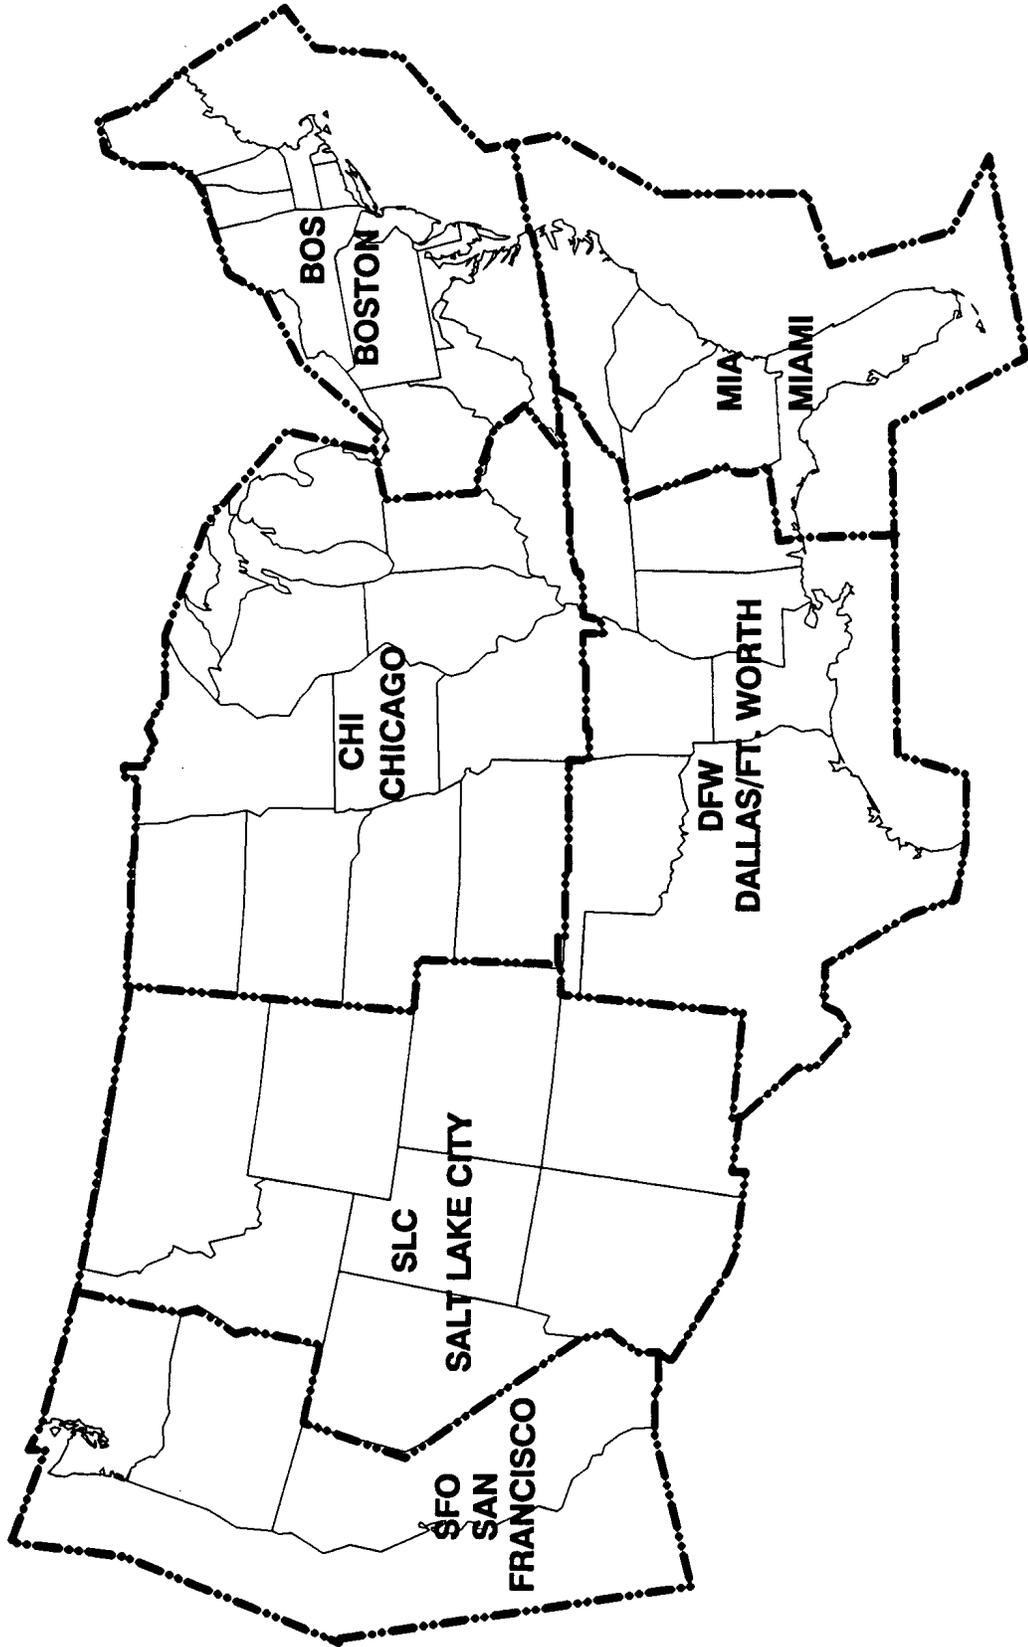


Figure 4-5. FA Locations - Contiguous United States.

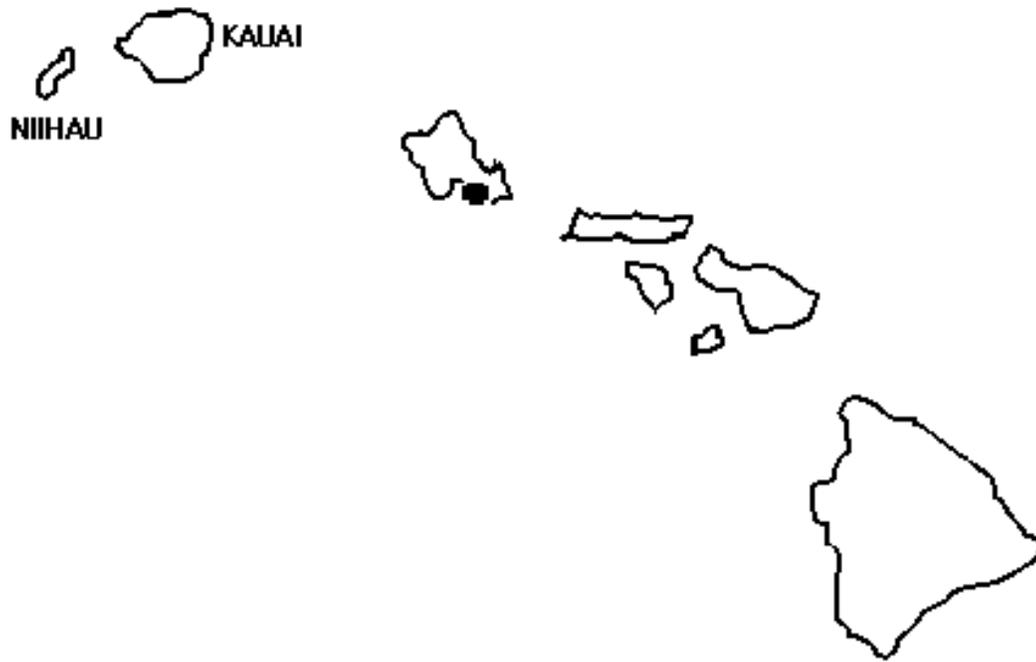

**AREA FORECAST LOCATIONS - HAWAII**

Figure 4-6. FA Locations - Hawaii.

## **INFLIGHT AVIATION WEATHER ADVISORIES**

Inflight Aviation Weather Advisories are forecasts to advise en route aircraft of development of potentially hazardous weather. All inflight aviation weather advisories in the conterminous U.S. are issued by the Aviation Weather Center (AWC) in Kansas City, Missouri. The WFO in Honolulu issues advisories for the Hawaiian islands. In Alaska, the Alaska Aviation Weather Unit (AAWU) issues inflight aviation weather advisories. All heights are referenced MSL, except in the case of ceilings CIG, which indicate AGL.

There are three types of inflight aviation weather advisories - the Significant Meteorological Information (SIGMET), the Airman's Meteorological Information (AIRMET), and Convective SIGMET. All of these advisories use the same location identifiers (either VORs, airports, or well-known geographic areas) to describe the hazardous weather areas (see Figures 4-11 and 4-12 on pages 4-45 and 4-46).

### **SIGMET (WS)/AIRMET (WA)**

SIGMETs/AIRMETs are issued corresponding to the FA areas (see Figures 4-5 and 4-6). The maximum forecast period is 4 hours for SIGMETs and 6 hours for AIRMETs. Both advisories are considered "widespread" because they must be either affecting or be forecasted to affect an area of at least 3,000 square miles at any one time. However, if the total area to be affected during the forecast period is very large, it could be that in actuality only a small portion of this total area would be affected at any one time.

### **SIGMET (WS)**

A SIGMET advises of nonconvective weather that is potentially hazardous to all aircraft. SIGMETs are unscheduled products that are valid for 4 hours. However, conditions that are associated with hurricanes are valid for 6 hours. Unscheduled updates and corrections are issued as necessary. In the conterminous U.S., SIGMETs are issued when the following phenomena occur or are expected to occur:

1. Severe icing not associated with thunderstorms
2. Severe or extreme turbulence or clear air turbulence (CAT) not associated with thunderstorms
3. Dust storms or sandstorms lowering surface or inflight visibilities to below 3 miles
4. Volcanic ash

In Alaska and Hawaii, SIGMETs are also issued for:

1. Tornadoes
2. Lines of thunderstorms
3. Embedded thunderstorms
4. Hail greater than or equal to  $\frac{3}{4}$  inch in diameter

SIGMETs are identified by an alphabetic designator from November through Yankee excluding Sierra and Tango. (Sierra, Tango, and Zulu are reserved for AIRMETs.) The first issuance of a SIGMET will be labeled as UWS (Urgent Weather SIGMET). Subsequent issuances are at the forecaster's discretion. Issuance for the same phenomenon will be sequentially numbered, using the original designator until the phenomenon ends. For example, the first issuance in the Chicago (CHI) FA area for phenomenon moving from the Salt Lake City (SLC) FA area will be SIGMET Papa 3, if the previous two issuances, Papa 1 and Papa 2, had been in the SLC FA area. Note that no two different phenomena across the country can have the same alphabetic designator at the same time.

December 1999

Example of a SIGMET:

BOSR WS 050600  
SIGMET ROMEO 2 VALID UNTIL 051000  
ME NH VT  
FROM CAR TO YSJ TO CON TO MPV TO CAR  
MOD TO OCNL SEV TURB BLW 080 EXP DUE TO STG NWLY FLOW. CONDS CONTG BYD  
1000Z.

### **International SIGMET**

Some NWS offices have been designated by the ICAO as Meteorological Watch Offices (MWOs). These offices are responsible for issuing International SIGMETs for designated areas that include Alaska, Hawaii, portions of the Atlantic and Pacific Oceans, and the Gulf of Mexico. The offices which issue International SIGMETs are the Alaskan Aviation Weather Unit in Anchorage, Alaska (AK); the Tropical Prediction Center in Miami, Florida (FL); the WFO in Honolulu, Hawaii (HI); the Aviation Weather Center in Kansas City, MO; and the WFO on Guam Island in the Pacific Ocean. These SIGMETs are considered “widespread” because they must be either affecting or be forecasted to affect an area of at least 3,000 square miles at any one time. The International SIGMET is issued for 12 hours for volcanic ash events, 6 hours for hurricanes and tropical storms, and 4 hours for all other events. Like the domestic SIGMETs, International SIGMETs are also identified by an alphabetic designator from Alpha through Mike and are numbered sequentially until that weather phenomenon ends. The criteria for an International SIGMET are:

1. Thunderstorms occurring in lines, embedded in clouds, or in large areas producing tornadoes or large hail
2. Tropical cyclones
3. Severe icing
4. Severe or extreme turbulence
5. Dust storms and sandstorms lowering visibilities to less than 3 miles
6. Volcanic ash

Example of an International SIGMET:

ZCZC MIASIGA1L  
TTAA00 KNHC 121600

KZNY SIGMET LIMA 5 VALID 121600/122000 UTC KNHC-

ACT TS OBS BY SATELLITE WI AREA BOUNDED BY 30N69W 31N64.6W 26.4N66.4W  
27.5N69.4W 30N69W. CB TOPS TO FL480. MOV ENE 15 KT. INTSF.

### **AIRMET (WA)**

AIRMETs (WAs) are advisories of significant weather phenomena but describe conditions at intensities lower than those which require the issuance of SIGMETs. AIRMETs are intended for dissemination to all pilots in the preflight and en route phase of flight to enhance safety. AIRMET Bulletins are issued on a scheduled basis every 6 hours beginning at 0145 UTC during Central Daylight Time and at 0245 UTC during Central Standard Time. Unscheduled updates and corrections are issued as necessary. Each AIRMET Bulletin contains any current AIRMETs in effect and an outlook for conditions expected after the AIRMET valid period. AIRMETs contain details about IFR, extensive mountain obscuration, turbulence, strong surface winds, icing, and freezing levels.

There are three AIRMETs - Sierra, Tango, and Zulu. AIRMET Sierra describes IFR conditions and/or extensive mountain obscurations. AIRMET Tango describes moderate turbulence, sustained surface winds of 30 knots or greater, and/or nonconvective low-level wind shear. AIRMET Zulu describes moderate icing and provides freezing level heights. After the first issuance each day, scheduled or unscheduled bulletins are numbered sequentially for easier identification.

Example of AIRMET Sierra issued for the Chicago FA area:

CHIS WA 121345

AIRMET SIERRA UPDT 3 FOR IFR AND MTN OBSCN VALID UNTIL 122000 .

AIRMET IFR...SD NE MN IA MO WI LM MI IL IN KY

FROM 70NW RAP TO 50W RWF TO 50W MSN TO GRB TO MBS TO FWA TO CVG TO HNN TO TRI TO ARG TO 40SSW BRL TO OMA TO BFF TO 70NW RAP

OCNL CIG BLW 010/VIS BLW 3SM FG/BR. CONDS ENDG 15Z-17Z.

.

AIRMET MTN OBSCN...KY TN

FROM HNN TO TRI TO CHA TO LOZ TO HNN

MTNS OCNL OBSC CLDS/PCPN/BR. CONDS ENDG TN PTN AREA 18Z- 20Z. CONTG KY BYD 20Z..ENDG 02Z.

....

Example of AIRMET Tango issued for the Salt Lake City FA area:

SLCT WA 121345

AIRMET TANGO UPDT 2 FOR TURB VALID UNTIL 122000 .

AIRMET TURB...NV UT CO AZ NM

FROM LKV TO CHE TO ELP TO 60S TUS TO YUM TO EED TO RNO TO LKV

OCNL MOD TURB BLW FL180 DUE TO MOD SWLY/WLY WND. CONDS CONTG BYD 20Z THRU 02Z.

.

AIRMET TURB...NV WA OR CA CSTL WTRS

FROM BLI TO REO TO BTY TO DAG TO SBA TO 120W FOT TO 120W TOU TO BLI

OCNL MOD TURB BTWN FL180 AND FL400 DUE TO WND SHR ASSOCD WITH JTSTR. CONDS CONTG BYD 20Z THRU 02Z.

....

Example of AIRMET Zulu issued for the San Francisco FA area:

SFOZ WA 121345

AIRMET ZULU UPDT 2 FOR ICE AND FRZLVL VALID UNTIL 122000 .

AIRMET ICE...WA OR ID MT NV UT

FROM YQL TO SLC TO WMC TO LKV TO PDT TO YDC TO YQL

LGT OCNL MOD RIME/MXD ICGICIP BTWN FRZLVL AND FL220. FRZLVL 080-120. CONDS CONTG BYD 20Z THRU 02Z.

.

AIRMET ICE...WA OR

FROM YDC TO PDT TO LKV TO 80W MFR TO ONP TO TOU TO YDC

LGT OCNL MOD RIME/MXD ICGICIP BTWN FRZLVL AND FL180. FRZLVL 060-080. CONDS CONTG BYD 20Z THRU 02Z.

.

FRZLVL...WA...060 CSTLN SLPG 100 XTRM E.

OR...060-070 CASCDS WWD. 070-095 RMNDR.

NRN CA...060-100 N OF A 30N FOT-40N RNO LN SLPG 100-110 RMNDR.

December 1999

## CONVECTIVE SIGMET (WST)

Convective SIGMETs are issued in the conterminous U.S. for any of the following:

1. Severe thunderstorm due to:
  - a. surface winds greater than or equal to 50 knots
  - b. hail at the surface greater than or equal to  $\frac{3}{4}$  inches in diameter
  - c. tornadoes
2. Embedded thunderstorms
3. A line of thunderstorms
4. Thunderstorms producing precipitation greater than or equal to heavy precipitation affecting 40% or more of an area at least 3,000 square miles

Any convective SIGMET implies severe or greater turbulence, severe icing, and low-level wind shear. A convective SIGMET may be issued for any convective situation that the forecaster feels is hazardous to all categories of aircraft.

Convective SIGMET bulletins are issued for the western (W), central (C), and eastern (E) United States. (Convective SIGMETs are not issued for Alaska or Hawaii.) The areas are separated at 87 and 107 degrees west longitude with sufficient overlap to cover most cases when the phenomenon crosses the boundaries. Bulletins are issued hourly at H+55. Special bulletins are issued at any time as required and updated at H+55. If no criteria meeting convective SIGMET requirements are observed or forecasted, the message "CONVECTIVE SIGMET...NONE" will be issued for each area at H+55. Individual convective SIGMETs for each area (W, C, E) are numbered sequentially from number one each day, beginning at 00Z. A convective SIGMET for a continuing phenomenon will be reissued every hour at H+55 with a new number. The text of the bulletin consists of either an observation and a forecast or just a forecast. The forecast is valid for up to 2 hours.

Example of a convective SIGMET:

MKCC WST 251655  
CONVECTIVE SIGMET 54C  
VALID UNTIL 1855Z  
WI IL  
FROM 30E MSN-40ESE DBQ  
DMSHG LINE TS 15 NM WIDE MOV FROM 30025KT. TOPS TO FL450. WIND GUSTS TO 50 KT  
POSS.

CONVECTIVE SIGMET 55C  
VALID UNTIL 1855Z  
WI IA  
FROM 30NNW MSN-30SSE MCW  
DVLPG LINE TS 10 NM WIDE MOV FROM 30015KT. TOPS TO FL300.

CONVECTIVE SIGMET 56C  
VALID UNTIL 1855Z  
MT ND SD MN IA MI  
LINE TS 15 NM WIDE MOV FROM 27020KT. TOPS TO FL380.

OUTLOOK VALID 151855-252255  
FROM 60NW ISN-INL-TVC-SBN-BRL-FSD-BIL-60NW ISN

IR STLT IMGRY SHOWS CNVTV CLD TOP TEMPS OVER SRN WI HAVE BEEN WARMING STEADILY INDCG A WKNG TREND. THIS ALSO REFLECTED BY LTST RADAR AND LTNG DATA. WKNG TREND OF PRESENT LN MAY CONT...HWVR NEW DVLPMPT IS PSBL ALG OUTFLOW BDRY AND/OR OVR NE IA/SW WI BHD CURRENT ACT.

A SCND TS IS CONTG TO MOV EWD THRU ERN MT WITH NEW DVLPMPT OCRG OVR CNTRL ND. MT ACT IS MOVG TWD MORE FVRBL AMS OVR THE WRN DAKS WHERE DWPTS ARE IN THE UPR 60S WITH LIFTED INDEX VALUES TO MS 6. TS EXPD TO INCR IN COVERAGE AND INTSTY DURG AFTN HRS.

WST ISSUANCES EXPD TO BE RQRD THRUT AFTN HRS WITH INCRG PTNTL FOR STGR CELLS TO CONTAIN LRG HAIL AND PSBLY DMGG SFC WND.

### **ALASKA, GULF OF MEXICO, AND INTERNATIONAL AREA FORECASTS (FAs)**

#### **ALASKA AREA FORECAST (FA)**

The Alaska Aviation Weather Unit in Anchorage, Alaska, produces the FA for the entire state of Alaska. The Alaska FA combines the FA, SIGMETs, and AIRMETs into one product. Each FA contains a regional synopsis, 12-hour geographic specific forecasts, and an 18-hour outlook for each geographic area. Forecast weather elements are sky condition, cloud height, mountain obscuration, visibility, weather and/or obstructions to visibility, strong surface winds (direction and speed), icing, freezing level, and mountain pass conditions. Hazards and flight precautions, including AIRMETs and SIGMETs, may be found in their respective geographic area. AIRMETs and SIGMETs are also issued as separate products.


Partial example of Alaska FA:  
JNUH FA 191445

.  
EASTERN GULF COAST AND SE AK...

.  
AIRMET VALID UNTIL 230300  
TS IMPLY POSSIBLE SEV OR GREATER TURB SEV ICE LLWS AND IFR CONDS.  
NON MSL HEIGHTS NOTED BY AGL OR CIG

.  
SYNOPSIS... VALID UNTIL 231500  
990 MB LOW VCY PACV DRFTG E AND WKN. CDFNT S FM LOW BCMG STNR AND WK ICY BAY SWD BY 15Z. E PACIFIC LOW S 50N MOV N TO 975 MB CNTR 50 SM W PASI AT 15Z WI OCFNT SWD.

.  
LYNN CANAL AND GLACIER BAY JB... VALID UNTIL 230900  
...CLOUDS/WX...  
...AIRMET MT OBSC...TEMPO MT OBSC INCLDS. NC...  
SCT030 SCT-BKN050 BKN100 TOP 160. TEMPO HI LYRS TOP FL250. TEMPO BKN030 ISOL -RA. SFC WND S 15 KT G25 KT LYNN CANAL.  
OTLK VALID 230900-240300...VFR RA. 18Z MVFR CIG RA.  
PASSES...WHITE AND CHILKOOT...MVFR CIG RASN.  
...TURB...  
LYNN CANAL...ISOL MOD TURB BLW 060. ELSW..NIL SIG.  
...ICE AND FZLVL...  
TEMPO LGT RIME ICEIC 050-120. FZLVL 030.

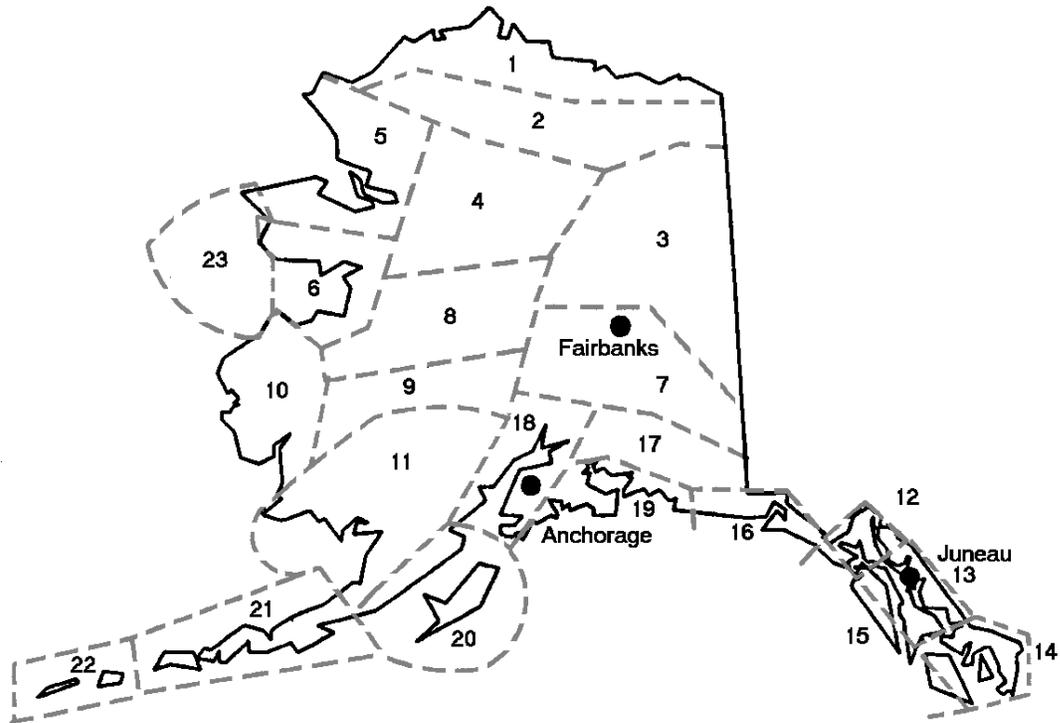

ALASKA AREA FORECAST SECTORS

Figure 4-7. Alaska Area Forecast Sectors.

**GULF OF MEXICO AREA FORECAST**

A specialized FA for the Gulf of Mexico is issued by the Tropical Prediction Center in Miami, Florida. The product combines the FA, inflight aviation weather advisories, and marine precautions. This product is intended to support both offshore heliport and general aviation operations. The Gulf of Mexico FA focuses on an area which includes the coastal plains and coastal waters from Apalachicola, Florida, to Brownsville, Texas, and the offshore waters of the Gulf of Mexico, in an area west of 85W longitude and north of 27N latitude. Each section of the FA describes the weather conditions expecting to impact the area and will include the descriptor none if no significant weather is forecast to occur. Amendments to this FA are issued the same as amendments to the domestic FAs.

Partial example of Gulf of Mexico FA:

FAGX01 KNHC 151030  
 151100Z-152300Z  
 OTLK...152300Z-161100Z  
 AMDT NOT AVBL 0200Z-1100Z  
 TROPICAL ANALYSIS AND FORECAST BRANCH  
 TROPICAL PREDICTION CENTER MIAMI FLORIDA

GLFMEX N OF 27N W OF 85W...CSTL PLAINS CSTL WTRS AQQ-BRO. HGTS MSL UNLESS NOTED.

TS IMPLY POSS SEV OR GTR TURB...SEV ICE...LOW LVL WS AND STG SFC WND...HIGH WAVES...CIG BLW 010...AND VIS BLW 3SM.

01 SYNS...

WK SFC TROUGH FM 31N84W TO 26N88W AT 11Z DRIFTING E THROUGH 23Z. WK HIGH PRES ACRS RMNDR GLFMEX THRU FCST AND OTLK PD.

...

02 FLT PRCTNS...

NONE.

...

03 MARINE PRCTNS...

NONE.

...

04 SGFNT CLD/WX...

CSTL PLAINS CSTL WTRS BRO-LCH AND OFSHR WTRS W OF 94W...FEW040. OTLK...VFR.

...

CSTL PLAINS LCH-AQQ...

FEW015. OCNL VIS 3-5SM BR. AFT 14Z SCT100. AFT 19Z SCT/BKN020-030 BKN/SCT070-090. WIDELY SCT TSRA/ISOL +TSRA.

...

05 ICE AND FZ LEVEL BLW 120...

NONE. FZ LEVEL ABV 120.

...

06 TURB BLW 120...

NONE.

...

December 1999

07 WND BLW 120...

CSTL PLAINS CSTL WTRS LCH-GPT AND OFSHR WTRS 94W-89W...SFC-120 NE-E 10-15 KT.  
OTLK...NOSIG.

...

08 WAVES...

CSTL WTRS BRO-AQQ...1-2 FT. OTLK...NOSIG.  
NNNN

## INTERNATIONAL AREA FORECASTS

FAs from the surface to 25,000 feet are also prepared in international format for areas in the Atlantic Ocean, Caribbean Sea, and the Gulf of Mexico. Moreover, significant weather forecasts for 25,000 feet to 60,000 feet are prepared in chart form and in international text format for the Northern and Western hemispheres.

Example of an International FA from the surface to FL250:

FANT2 KWBC 091600  
091800Z TO 100600Z

ATLANTIC OCEAN WEST OF A LINE FROM 40N 67W TO 32N 63W.SFC TO FL250.

SYNOPSIS.

RIDGE OVER AREA MOVING TO EAST. FRONTAL SYSTEM MOVING OFF COAST BY 06Z.

SIGNIFICANT CLDS/WX.

N OF 34N AND W OF 71W...PATCHES OVC005/015 TOP 030/040OTHERWISE  
BKN/OVC015/025 BKN/OVC200/240. BY 06Z INCREASING IMC IN SHRA/TS SPREADING  
ACROSS AREA FROM WEST. TS TOPS ABOVE 240.

S OF 34N AND W OF 75W...SCT/BKN 015/250. BY 06Z INCREASING IMC IN SHRA/TS  
SPREADING ACROSS AREA FROM WEST. TS TOPS ABOVE 240.

ELSEWHERE...CLR OCNL SCT015/025. BY 06Z INCREASING BKN080/100.

ICE.

FZ LVL 080/090 N SLOPING TO 120/130 S. MOD IN SHRA.SEV IN TS.

TURB.

MOD IN SHRA. SEV IN TS.

OUTLOOK.

100600Z TO 101800Z

FRONT CONTINUING SLOWLY EWD. INCREASING IMC IN SHRA/TS SPREADNG E OVER  
AREA. SHRA/TS ENDING SW PORTION AFTER FRONTAL PASSAGE.

Example of international significant weather forecast for FL250 to FL600:

FAPA1 KWBC 141610

SIG WX PROG FL250-FL600 VALID 150600Z

ISOL EMBD CB TOPS 400 NE OF 11N173W 14N166W 11N164W 01N174W

ISOL EMBD CB TOPS 400 07N158W 08N137W 11N137W 12N158W 07N158W

ISOL EMBD CB TOPS 400 19N157W 32N143W 22N162W 15N162W

MDT OR GRTR TURB AND ICG VCNTY ALL CBS

MDT TURB 310-410 19N145W 25N144W 19N163W 15N162W 19N145W

The groups of numbers and letters are the boundary points of the areas in latitude and longitude. For example, "11N173W" is latitude 11 degrees north and longitude 173 degrees west.

### **TRANSCRIBED WEATHER BROADCAST (TWEB) TEXT PRODUCTS**

NWS offices prepare transcribed weather broadcast (TWEB) text products for the contiguous U.S., including synopsis and forecast for more than 200 routes and local vicinities. (See Figure 4-8.) (Not all NWS forecast offices issue all three of these products.) These products may be used in the Telephone Information Briefing Service (TIBS), Pilot's Automatic Telephone Weather Answering Service (PATWAS), Low/Medium Frequency (L/MF) and VHF omni-directional radio range (VOR) facilities as described in Section 1. TWEB products are valid for 12 hours and are issued 4 times a day at 0200Z, 0800Z, 1400Z, and 2000Z. A TWEB route forecast or vicinity forecast will not be issued if the TAF for that airport has not been issued. A NIL TWEB will be issued instead.

A TWEB route forecast is for a 50-nautical-mile wide corridor along a line connecting the end points of the route. A TWEB local vicinity forecast covers an area with a radius of 50 nautical miles. The route and vicinity forecasts describe specific information on sustained surface winds (25 knots or greater), visibility, weather and obscuration to vision, sky conditions (coverage and ceiling/cloud heights), mountain obscurement, and nonconvective low-level wind shear. If visibility of 6SM or less is forecast, obstructions to vision and/or weather will be included. Thunderstorms and volcanic ash will always be included regardless of the visibility. Cloud bases can be described either in MSL or AGL (CIGS or BASES). It depends on which statement is used: "ALL HGTS MSL XCP CIGS." or "ALL HGTS AGL XCP TOPS." Use of "AGL," "CIGS," and "BASES" should be limited to cloud bases within 4,000 feet of the ground. Cloud tops, referenced to MSL, should also be forecasted following the sky cover when expected to be below 15,000 MSL using the sky cover contractions FEW, SCT, or BKN. Nonconvective low-level wind shear will be included when the TAF for the airport involved has issued a nonconvective low-level wind shear forecast. Expected areas of icing and turbulence will not be included.

Example of TWEB route forecast:

249 TWEB 251402 KISN-KMOT-KGFK. ALL HGTS AGL XCP TOPS. KISN-50NM E KISN TIL 00Z P6SM SKC...AFT 00Z P6SM SCT050 LCL P6SM -TSRA BKN050. 50NM E KISN-KDVL TIL 20Z P6SM SCT070...AFT 20Z P6SM SCT070 LCL SFC WNDS VRB35G45KT 3-5SM TSRA CIGS OVC030-040. KDVL-KGFK TIL 16Z P6SM SCT-BKN020 AREAS 3-5SM BR...AFT 16Z P6SM SCT040.

December 1999

Explanation of route forecast:

249 - route number

TWEB - TWEB route forecast

25 - twenty-fifth day of the month

1402 - valid 14Z on the twenty-fifth to 02Z on the twenty-sixth (12 hours)

KISN-KMOT-KGFK - route: Williston, North Dakota (ND), to Minot, ND, to Grand Forks, ND

Remainder of the message explained: All heights AGL except cloud tops. KISN-50NM E KISN until 00Z, visibility greater than 6SM with clear skies. After 00Z, visibility greater than 6SM with scattered clouds at 5,000 feet AGL. Local areas of visibility greater than 6SM, thunderstorm with light rain showers, and broken clouds at 5,000 feet AGL. 50 NM E KISN-KDVL (Devil's Lake, ND) until 20Z, visibility greater than 6SM, scattered clouds at 7,000 feet AGL. After 20Z, visibility greater than 6SM, scattered clouds at 7,000 feet AGL, local surface winds variable at 35 gusting to 45 knots, visibility 3-5SM, thunderstorm with moderate rain showers, overcast ceilings 3,000-4,000 feet AGL. KDVL-KGFK until 16Z, visibility greater than 6SM, scattered to broken clouds at 2,000 feet AGL, areas of visibility 3-5SM with mist. After 16Z, visibility greater than 6SM, scattered clouds at 4,000 feet AGL.

An example of TWEB vicinity forecast:

431 TWEB 021402 LAX BASIN. ALL HGTS MSL XCP CIGS. TIL 18Z P6SM XCP 3SM BR VLYS BKN020...18Z-22Z P6SM SCT020 SCT-BKN100...AFT 22Z P6SM SKC.

Explanation of vicinity forecast:

431 - TWEB vicinity number

TWEB - TWEB forecast

02 - second day of the month

1402 - valid 14Z on the second to 02Z on the third (12 hours)

LAX BASIN - The weather conditions in the Los Angeles basin until 18Z, visibility greater than 6SM except 3SM due to mist in the valleys and broken clouds at 2,000 feet MSL. Between 18Z and 22Z, visibility greater than 6SM and scattered clouds at 2,000 feet AGL; also scattered to broken clouds at 10,000 feet MSL. After 22Z, visibility greater than 6SM and sky clear.

A TWEB synopsis forecast is a brief description of the weather systems affecting the route during the forecast valid period. The synopsis describes movement of pressure systems, movement of fronts, upper air disturbances, or air flow.

An example of a TWEB synopsis:

BIS SYNS 250820. LO PRES TROF MVG ACRS ND TDA AND TNGT. HI PRES MVG SEWD FM CANADA INTO NWRN ND BY TNGT AND OVR MST OF ND BY WED MRNG.

Explanation of synopsis:

BIS - Bismarck, ND, WFO issuing the synopsis and route forecast

SYNS - Synopsis for the area covered by the route forecast

25 - twenty-fifth day of the month

0820 - Valid from 08Z on the twenty-fifth to 20Z on the twenty-fifth (12 hours)

The remainder of message explained: Low pressure trough moving across North Dakota today and tonight. High pressure moving southeastward from Canada into northwestern North Dakota by tonight and over most of North Dakota by Wednesday morning.

An example of another TWEB synopsis:

CYS SYNS 101402 STG UPSLP WNDS OVR WY TIL 01Z WITH WDSPRD IFR CONDS IN LGT SN  
AND BLOWING SN. CONDS WL IPV FM N TO S ACRS WY AFT 01Z WITH DCRG CLDS.

Explanation of synopsis:

CYS - Cheyenne, WY, WFO issuing the synopsis and route forecast

SYNS - Synopsis for the area covered by the route forecast

10 - tenth day of the month

1402 - Valid from 14Z on the tenth to 02Z on the eleventh (12 hours)

The remainder of the message explained: Strong upslope winds over Wyoming until 01Z with widespread IFR conditions in light snow and blowing snow. Conditions will improve from north to south across Wyoming after 01Z with decreasing clouds.

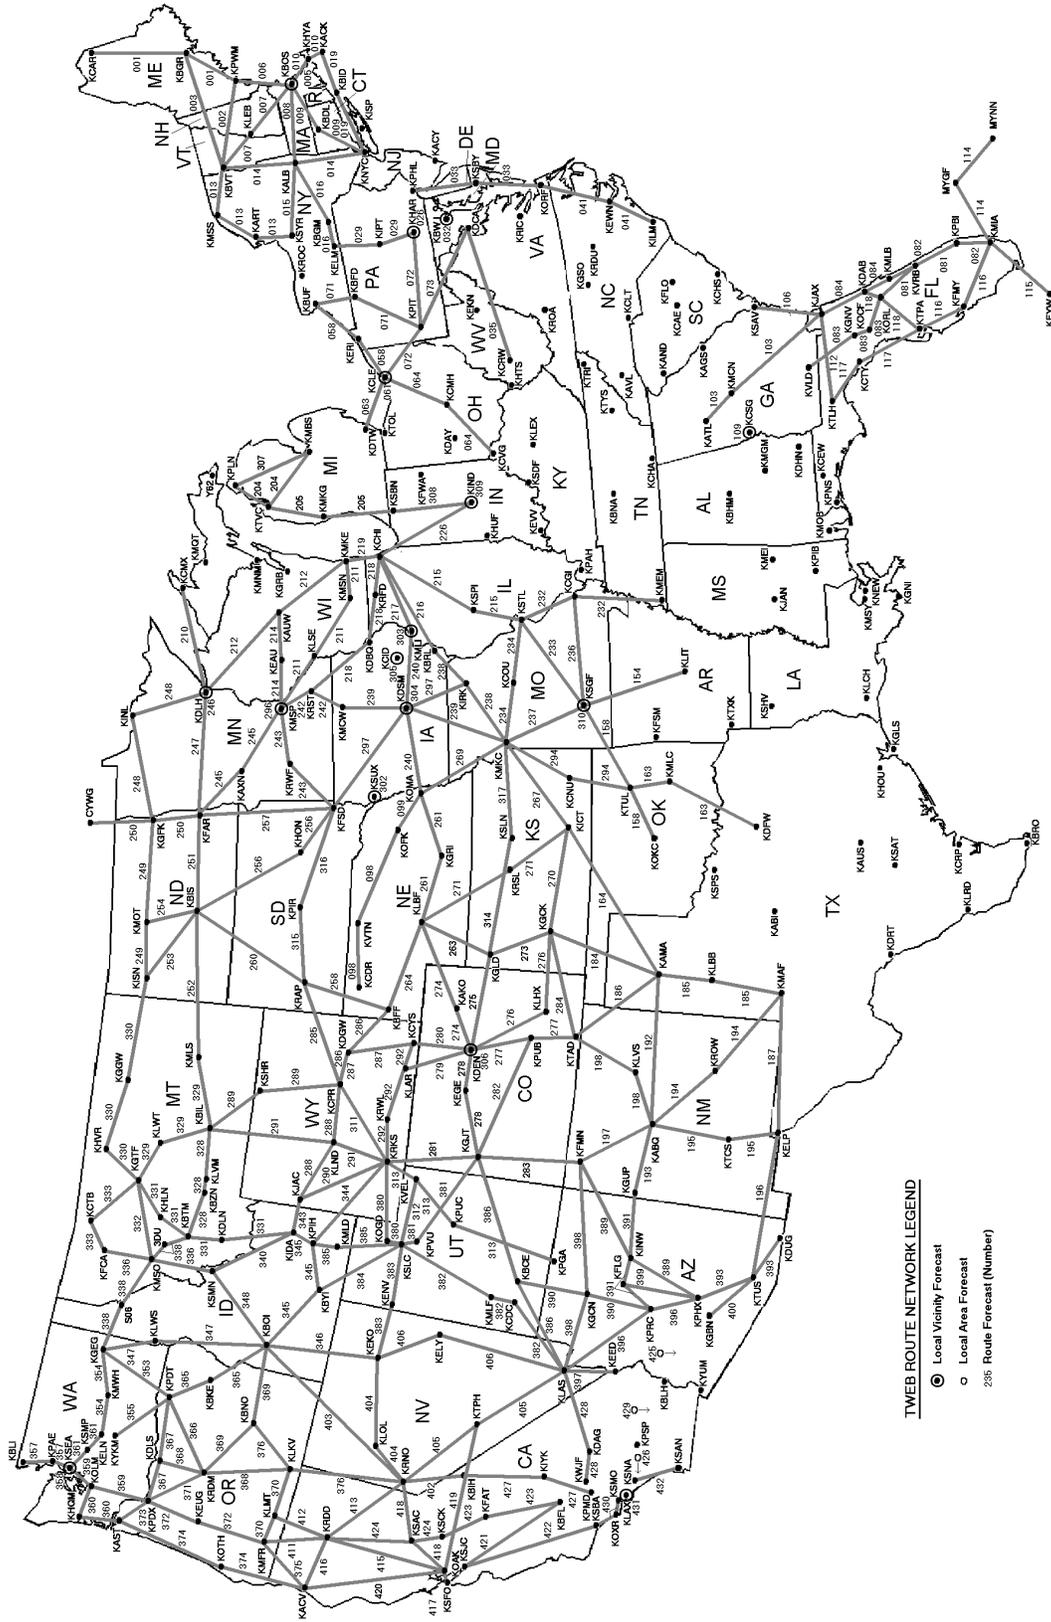


Figure 4-8. TWEB Route Map.

**WINDS AND TEMPERATURES ALOFT FORECAST (FD)**

Winds and temperatures aloft are forecasted for specific locations in the contiguous U.S., as shown in Figure 4-9. The FD forecasts are also prepared for a network of locations in Alaska and Hawaii as shown in Figure 4-10. Forecasts are made twice daily based on the 00Z and 12Z radiosonde data for use during specific time intervals.

Below is a sample FD message containing a heading and two FD locations. The heading always includes the time during which the FD may be used (0500-0900Z in the example) and a notation "TEMPS NEG ABV 24000." Since temperatures above 24,000 feet are always negative, the minus sign is omitted.

Example of FD report:

DATA BASED ON 010000Z

VALID 010600Z FOR USE 0500-0900Z. TEMPS NEG ABV 24000

FT	3000	6000	9000	12000	18000	24000	30000	34000	39000
MKC	2426	2726-09	2826-14	2930-21	2744-32	2751-41	275550	276050	731960
ABQ			1912+15	1914+07	1917-06	1820-17	172132	171942	192054

Explanation of FD:

The data are based on the radiosonde information from the 1<sup>st</sup> day of the month at 00Z. The second line describes the valid time. In this example, the valid time is the 1<sup>st</sup> at 06Z for use on the 1<sup>st</sup> between 05-09Z. Temperatures are negative above 24,000 feet. The line labeled "FT" indicates the levels of the wind and temperature data. Through 12,000, feet the levels are true altitude. From 18,000 feet and above, the levels are pressure altitude. The 45,000-foot and 53,000-foot levels are also available. The pilot may request these levels from the FSS briefer. A six-digit group shows wind direction, in reference to true north, wind speed in knots, and temperature in degrees Celsius.

Note the Kansas City, MO (MKC), forecast for 3,000 feet. The group "2426" means the wind is from 240 degrees at 26 knots. The first two digits give direction in tens of degrees and the second two digits are the wind speed in knots. In the MKC forecast, the coded group for 9,000 feet is "2826-14." The wind is from 280 degrees at 26 knots and the temperature is negative 14 degrees Celsius. Note in the Albuquerque (ABQ) 3,000- and 6,000-foot examples that the wind group is omitted. No winds are forecasted within 1,500 feet of station elevation. Also, no temperatures are forecasted for any level within 2,500 feet of station elevation. (See MKC 3000 example.)

If a wind direction is coded between 51 and 86, the wind speed is 100 knots or greater. For example, the MKC forecast for 39,000 feet is "731960." To decode this, subtract 50 from the wind direction and add 100 knots to the wind speed. Thus, the wind direction is from 230 degrees (73-50=23) and the speed is 119 knots (100+19=119). The temperature is minus 60 degrees Celsius. If the wind speed is forecasted to be 200 knots or greater, the wind group is coded as 99 knots. For example, "7799" is decoded as 270 degrees at 199 knots or greater. When the forecast speed is less than 5 knots, the coded group is "9900" and read, "LIGHT AND VARIABLE."

Examples of decoding FDs:

Coded	Decoded
9900+00	Wind light and variable, temperature 0 degrees Celsius
2707	270 degrees at 7 knots
850552	350 degrees (85-50=35) at 105 knots (100+05=105), temperature -52 degrees Celsius

# FORECAST WINDS AND TEMPERATURES ALOFT NETWORK



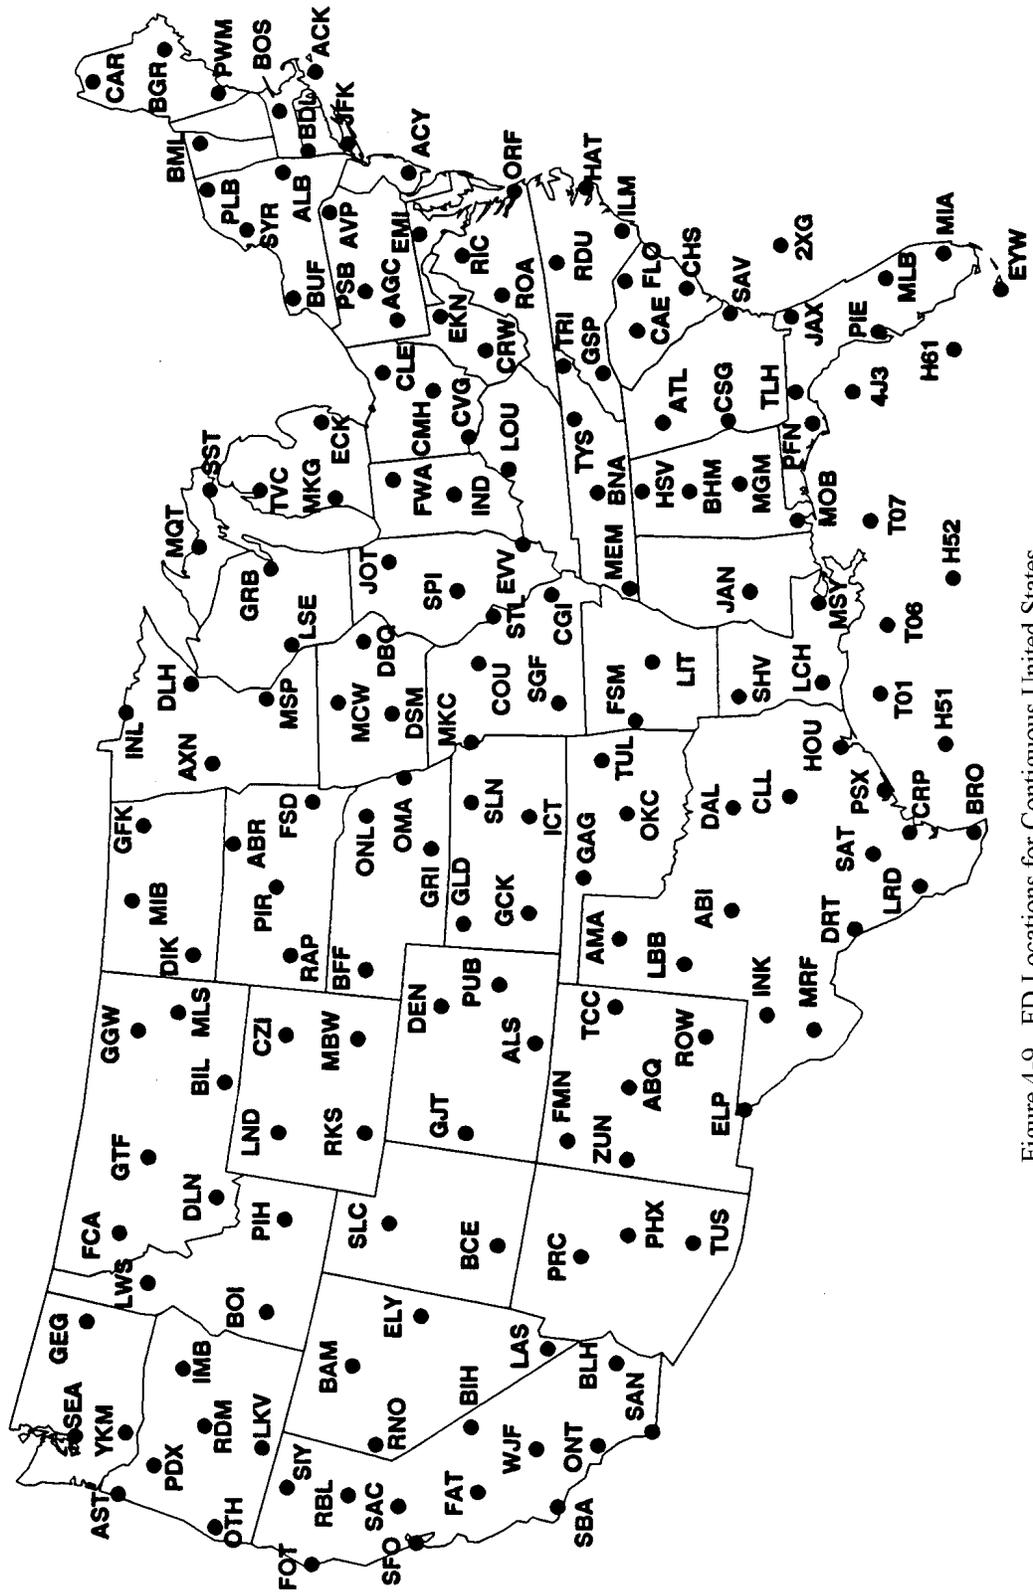


Figure 4-9. FD Locations for Contiguous United States.

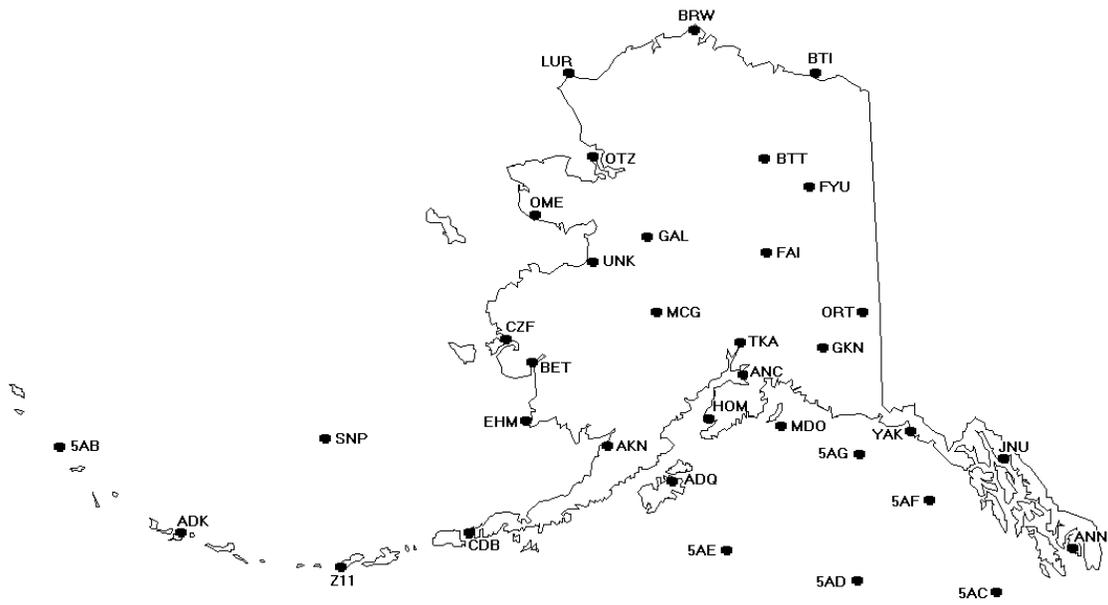

**ALASKA LOCATIONS**

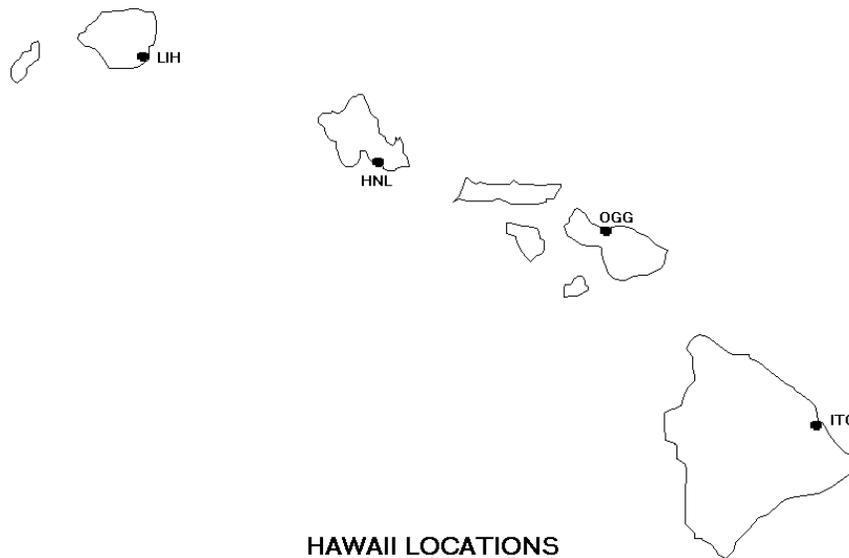

**HAWAII LOCATIONS**

Figure 4-10. FD Locations for Alaska and Hawaii.

## **CENTER WEATHER SERVICE UNIT (CWSU) PRODUCTS**

Center Weather Service Unit (CWSU) products are issued by the CWSU meteorologists located in the Air Route Traffic Control Centers (ARTCCs). Coordination between the CWSU meteorologist and other NWS facilities is extremely important since both can address the same event. If time permits, coordination should take place before the CWSU meteorologist issues a product.

### **METEOROLOGICAL IMPACT STATEMENT (MIS)**

A Meteorological Impact Statement (MIS) is an unscheduled flow control and flight operations planning forecast. The MIS can be valid between 2 to 12 hours after issuance. This enables the impact of expected weather conditions to be included in air traffic control decisions in the near future. The MIS will be issued when the following three conditions are met:

1. If any one of the following conditions occur, are forecasted to occur, and if previously forecasted, are no longer expected to occur:
  - a. convective SIGMET criteria
  - b. moderate or greater icing and/or turbulence
  - c. heavy or freezing precipitation
  - d. low IFR conditions
  - e. surface winds/gusts 30 knots or greater
  - f. low-level wind shear within 2,000 feet of the surface
  - g. volcanic ash, dust or sandstorm
2. If the impact occurs on air traffic flow within the ARTCC area of responsibility
3. If the forecast lead time (the time between issuance and onset of a phenomenon), in the forecaster's judgment, is sufficient to make issuance of a Center Weather Advisory (CWA) unnecessary

Example of a MIS:

```
ZOA MIS 01 VALID 041415-041900
...FOR ATC PLANNING PURPOSES ONLY...
FOR SFO BAY AREA
DNS BR/FG WITH CIG BLO 005 AND VIS OCNL BLO 1SM TIL 19Z.
```

This MIS from the Fremont, California (CA), ARTCC is the first issuance of the day. It was issued at 1415Z on the fourth and is valid until 1900Z on the fourth. This forecast is for the San Francisco Bay area. The forecast is of dense fog/mist with ceilings below 500 feet and visibilities occasionally below 1SM until 19Z.

Example:

```
ZOA MIS 02 VALID 041650
...FOR ATC PLANNING PURPOSES ONLY...
FOR SFO BAY AREA
CANCEL ZOA MIS 01. DNS BR/FG CONDS HAVE IPVD ERYR THAN FCST.
```

This MIS is from the Fremont, CA, ARTCC and cancels the previously issued MIS. Specifically it states dense fog/mist conditions have improved earlier than forecasted.

Example:

ZID MIS 03 VALID 041200-042330  
 ...FOR ATC PLANNING PURPOSES ONLY...  
 FROM IND TO CMH TO LOZ TO EVV TO IND  
 FRQ MOD TURBC FL310-390 DUE TO JTSTR...CONDS DMSHG IN INTSTY AFT 21Z.

This MIS from the Indianapolis, Indiana (IN), ARTCC was issued at 1200Z on the fourth and valid until the fourth at 2330Z. This forecast describes an area from Indianapolis, IN, to Columbus, Ohio (OH), to London, Kentucky (KY), to Evansville, IN, and back to Indianapolis, IN. The MIS describes frequent moderate turbulence between flight levels 310-390 caused by the jet stream. Conditions will diminish in intensity after 21Z.

### **CENTER WEATHER ADVISORY (CWA)**

A Center Weather Advisory (CWA) is an aviation warning for use by air crews to anticipate and avoid adverse weather conditions in the en route and terminal environments. The CWA is not a flight planning product; instead it reflects current conditions expected at the time of issuance and/or is a short-range forecast for conditions expected to begin within 2 hours of issuance. CWAs are valid for a maximum of 2 hours. If conditions are expected to continue beyond the 2-hour valid period, a statement will be included in the CWA.

A CWA may be issued for the following three situations:

1. As a supplement to an existing inflight aviation weather advisory for the purpose of improving or updating the definition of the phenomenon in terms of location, movement, extent, or intensity relevant to the ARTCC area of responsibility. This is important for the following reason. A SIGMET for severe turbulence was issued by AWC, and the outline covered the entire ARTCC area for the total 4-hour valid time period. However, the forecaster may issue a CWA covering only a relatively small portion of the ARTCC area at any one time during the 4-hour period.
2. When an inflight aviation weather advisory has not yet been issued but conditions meet the criteria based on current pilot reports and the information must be disseminated sooner than the AWC can issue the inflight aviation weather advisory. In this case of an impending SIGMET, the CWA will be issued as urgent (UCWA) to allow the fastest possible dissemination.
3. When inflight aviation weather advisory criteria are not met but conditions are or will shortly be adversely affecting the safe flow of air traffic within the ARTCC area of responsibility.

Example of a CWA:

ZME1 CWA 081300  
 ZME CWA 101 VALID UNTIL 081500  
 FROM MEM TO JAN TO LIT TO MEM  
 AREA SCT VIP 5-6 (INTENSE/EXTREME) TS MOV FROM 26025KT. TOPS TO FL450.

This CWA was issued by the Memphis, Tennessee (TN), ARTCC. The 1 after the ZME in the first line denotes this CWA has been issued for the first weather phenomenon to occur for the day. It was written on the eighth at 1300Z. The 101 in the second line denotes the phenomenon number again (1) and the issuance number (01) for this phenomenon. The CWA is until the eighth at 1500Z. The area is bounded from Memphis, TN, to Jackson, MS, to Little Rock, AR, and back to Memphis, TN. Within the CWA is an area with scattered VIP 5-6 (intense/extreme) thunderstorms moving from 260 degrees at 25 knots. Tops of the thunderstorms are at FL450.

December 1999

### **HURRICANE ADVISORY (WH)**

When a hurricane threatens a coastline, but is located at least 300NM offshore, a Hurricane Advisory (WH) is issued to alert aviation interests. The advisory gives the location of the storm center, its expected movement, and the maximum winds in and near the storm center. It does not contain details of associated weather, as specific ceilings, visibilities, weather, and hazards that are found in the FAs, TAFs, and inflight aviation weather advisories.

Example of a WH:

ZCZC MIATCPAT4

TTAA00 KNHC 190841

BULLETIN

HURRICANE DANNY ADVISORY NUMBER 13

NATIONAL WEATHER SERVICE MIAMI FL

4 AM CDT SAT JUL 19 1997

...DANNY STILL MOVING LITTLE...ANY NORTHWARD DRIFT WOULD BRING THE CENTER ONSHORE...

HURRICANE WARNINGS ARE IN EFFECT FROM GULFPORT MISSISSIPPI TO APALACHICOLA FLORIDA. SMALL CRAFT SOUTHWEST OF GULFPORT SHOULD REMAIN IN PORT UNTIL WINDS AND SEAS SUBSIDE.

AT 4 AM CDT...0900Z...THE CENTER OF HURRICANE DANNY WAS LOCATED BY NATIONAL WEATHER SERVICE RADAR AND RECONNAISSANCE AIRCRAFT NEAR LATITUDE 30.2 NORTH...LONGITUDE 88.0 WEST...VERY NEAR THE COAST ABOUT 25 MILES SOUTH-SOUTHEAST OF MOBILE ALABAMA.

DANNY HAS MOVED LITTLE DURING THE PAST FEW HOURS. WHILE SOME ERRATIC MOTION CAN BE EXPECTED DURING THE NEXT FEW HOURS...A GRADUAL TURN TOWARD THE NORTHEAST IS EXPECTED TODAY. ON THIS COURSE...THE CENTER IS EXPECTED TO MAKE LANDFALL IN THE WARNING AREA TODAY. HOWEVER ANY DEVIATION TO THE NORTH OR THE TRACK WOULD BRING THE CENTER ONSHORE WITHIN THE WARNING AREA AT ANYTIME. MAXIMUM SUSTAINED WINDS ARE NEAR 75 MPH WITH HIGHER GUSTS. SOME STRENGTHENING IS STILL POSSIBLE PRIOR TO LANDFALL. DAUPHIN ISLAND RECENTLY REPORTED GUSTS TO 66 MPH AND THE PRESSURE DROPPED TO 989MB...29.20 INCHES.

DANNY HAS A RELATIVELY SMALL WIND FIELD. HURRICANE FORCE WINDS EXTEND OUTWARD UP TO 25 MPH FROM THE CENTER AND TROPICAL STORM FORCE WINDS EXTEND OUTWARD UP TO 70 MILES.

LATEST MINIMUM CENTRAL PRESSURE REPORTED BY A RECONNAISSANCE AIRCRAFT WAS 986 MB...29.11 INCHES.

RADAR SHOWS RAIN BANDS AFFECTING THE AREA FROM SOUTHERN MISSISSIPPI TO THE FLORIDA PANHANDLE. TOTALS OF 10 TO 20 INCHES...LOCALLY HIGHER...COULD OCCUR NEAR THE TRACK OF DANNY DURING THE NEXT FEW DAYS.

STORM SURGE FLOODING OF 4 TO 5 FEET ABOVE NORMAL TIDES IS POSSIBLE ALONG THE GULF COAST EAST OF THE CENTER.

Example of WH forecast/advisory:

ZCZC MIATCMAT4

TTAA00 KNHC 190845

HURRICANE DANNY FORECAST/ADVISORY NUMBER 13

NATIONAL WEATHER SERVICE MIAMI FL AL0497

0900Z SAT JUL 19 1997

HURRICANE WARNINGS ARE IN EFFECT FROM GULFPORT MISSISSIPPI TO APALACHICOLA FLORIDA. SMALL CRAFT SOUTHWEST OF GULFPORT SHOULD REMAIN IN PORT UNTIL THE WINDS AND SEAS SUBSIDE.

HURRICANE CENTER LOCATED NEAR 30.2 N 88.0 W AT 19/0900Z POSITION ACCURATE WITHIN 30 NM.

PRESENT MOVEMENT NEARLY STATIONARY

ESTIMATED MINIMUM CENTRAL PRESSURE 986 MB  
MAX SUSTAINED WINDS 65 KTS WITH GUSTS TO 80 KT  
64 KT      15NE 20SE 0SW 0NW  
50 KT      20NE 30SE 30SW 0NW  
34 KT      30 E 60SE 60SW 30NW  
12FT SEAS 30NE 60SE 60SW 30NW  
ALL QUADRANT RADII IN NAUTICAL MILES

FORECAST VALID 19/1800Z 30.2N 87.4W  
MAX WIND      70 KT...GUSTS 85 KT  
64 KT      20NE 20SE 20SW 20NW  
50 KT      25NE 30SE 30SW 25NW  
34 KT      30NE 75SE 75SW 30NW

### CONVECTIVE OUTLOOK (AC)

A Convective Outlook (AC) is a national forecast of thunderstorms. There are two forecasts: Day 1 Convective Outlook (first 24 hours) and Day 2 Convective Outlook (next 24 hours). These forecasts describe areas in which there is a slight, moderate, or high risk of severe thunderstorms, as well as areas of general (non-severe) thunderstorms. The severe thunderstorm criteria are: Winds equal to or greater than 50 knots at the surface, or hail equal to or greater than 3/4 inch in diameter at the surface, or tornadoes. The Refer to the Convective Outlook Chart (Section 12) for risk definitions. Forecast reasoning is also included in all ACs. Outlooks are produced by the Storm Prediction Center (SPC) located in Norman, OK. The times of issuance for Day 1 are 0600Z, 1300Z, 1630Z, 2000Z, and 0100Z. The initial Day 2 issuance is at 0830Z during standard time and 0730Z during daylight time. It is updated at 1730Z. The AC is a flight planning tool used to avoid thunderstorms.

December 1999

Example:

MKC AC 291435

CONVECTIVE OUTLOOK...REF AFOS NMCGPH940.

VALID 291500Z-301200Z

THERE IS A SLGT RISK OF SVR TSTMS TO THE RIGHT OF A LINE FROM 10 NE JAX 35 NNW  
AYS AGS 15 E SPA 30 NE CLT 25 N FAY 30 ESE EWN.

GEN TSTMS ARE FCST TO THE RIGHT OF A LINE FROM 55 ESE YUM 30 NE IGM 15 S CDC 30  
SW U24 25 ESE ELY 40 W P38 DRA 50 SW DRA 50 NW NID SAC 30 E ACV 25 E ONP 40 E BLI.

...SEVERE THUNDERSTORM FORECAST DISCUSSION...

.SERN U.S...

COOL FRONT CONTS SC/NC BORDER. VERY MOIST AND UNSTBL AMS ALONG AND S OF  
FRONT E OF APLCHNS WITH CAPE TO REACH TO 4000 J/KG WITH AFTN HEATING.  
ALTHOUGH WIND PROFILES ARE WK...COMB OF FRONTAL CNVGNC COUPLED WITH SEA  
BREEZE FRONT WILL INITIATE PULSE SVR TSTMS VCNTY AND S OF FRONT THIS  
AFTN/EVE. PRIMARY SVR EVENTS WILL BE WET DOWNBURST TO PUSH SWD FROM  
CNTRL RCKYS EWD TO MID ATLC CST. E OF APLCNS FRONT NOW LCTD VCNTY WND  
DMG.

...GENERAL THUNDERSTORM FORECAST DISCUSSION...

...GULF CST AREA INTO SRN PLNS...

SFC FNT CURRENTLY LOCATED FM THE CAROLINAS WWD INTO PARTS OF OK WL CONT  
TO SAG SLOWLY SWD ACRS THE SRN APLCNS/LWR MS VLY THRU THE REMAINDER OF  
THE PD. S OF THE BNDRY...A VRY MOIST AMS RMNS IN PLACE AS DWPNTS ARE IN THE  
MID TO UPR 70S. WHILE SOME CLDNS IS PRESENT ACRS THE AREA...SUF HEATING  
SHOULD OCR TO ALLOW FOR MDT TO STG AMS DSTBLZN DURG THE LATE MRNG/ERY  
AFTN. AS A RESULT...SFC BASED CAPE VALUES SHOULD BE AOA 2000 J/KG THIS AFTN.  
BNDRYS FM OVERNIGHT CNVTN AS WELL AS SEA BREEZE CIRCULATIONS SHOULD BE  
SUF TO INITIATE SCT TO NMRS TSTMS ACRS THE AREA. MID TO UPR LVL FLOW IS  
RELATIVELY WK...SO THIS SUG ORGANIZED SVR TSTM ACTVTVY IS NOT LIKELY.

### **SEVERE WEATHER WATCH BULLETINS (WWs) and ALERT MESSAGES (AWWs)**

A Severe Weather Watch Bulletin (WW) defines areas of possible severe thunderstorms or tornado activity. The bulletins are issued by the SPC in Norman, OK. WWs are unscheduled and are issued as required.

A severe thunderstorm watch describes areas of expected severe thunderstorms. (Severe thunderstorm criteria are ¾-inch hail or larger and/or wind gusts of 50 knots [58 mph] or greater.) A tornado watch describes areas where the threat of tornadoes exists.

In order to alert the WFOs, CWSUs, FSSs, and other users, a preliminary notification of a watch called the Alert Severe Weather Watch bulletin (AWW) is sent before the WW. (WFOs know this product as a SAW).

Example of an AWW:

MKC AWW 011734

WW 75 TORNADO TX OK AR 011800Z-020000Z

AXIS..80 STATUTE MILES EAST AND WEST OF A LINE.60ESE DAL/DALLAS TX/ - 30 NW ARG/ WALNUT RIDGE AR/

..AVIATION COORDS.. 70NM E/W /58W GGG - 25NW ARG/

HAIL SURFACE AND ALOFT..1 ¾ INCHES. WIND GUSTS..70 KNOTS. MAX TOPS TO 450. MEAN WIND VECTOR 24045.

Soon after the AWW goes out, the actual watch bulletin itself is issued. A WW is in the following format:

1. Type of severe weather watch, watch area, valid time period, type of severe weather possible, watch axis, meaning of a watch, and a statement that persons should be on the lookout for severe weather
2. Other watch information; i.e., references to previous watches
3. Phenomena, intensities, hail size, wind speed (knots), maximum CB tops, and estimated cell movement (mean wind vector)
4. Cause of severe weather
5. Information on updating ACs

Example of a WW:

BULLETIN - IMMEDIATE BROADCAST REQUESTED

TORNADO WATCH NUMBER 381

STORM PREDICTION CENTER NORMAN OK

556 PM CDT MON JUN 2 1997

THE STORM PREDICTON CENTER HAS ISSUED A TORNADO WATCH FOR PORTIONS OF

NORTHEAST NEW MEXICO  
TEXAS PANHANDLE

EFFECTIVE THIS MONDAY NIGHT AND TUESDAY MORNING FROM 630 PM UNTIL MIDNIGHT CDT.

TORNADOES...HAIL TO 2 ¾ INCHES IN DIAMETER...THUNDERSTORM WIND GUSTS TO 80 MPH...AND DANGEROUS LIGHTNING ARE POSSIBLE IN THESE AREAS.

THE TORNADO WATCH AREA IS ALONG AND 60 STATUTE MILES NORTH AND SOUTH OF A LINE FROM 50 MILES SOUTHWEST OF RATON NEW MEXICO TO 50 MILES EAST OF AMARILLO TEXAS.

REMEMBER...A TORNADO WATCH MEANS CONDITIONS ARE FAVORABLE FOR TORNADOES AND SEVERE THUNDERSTORMS IN AND CLOSE TO THE WATCH AREA. PERSONS IN THESE AREAS SHOULD BE ON THE LOOKOUT FOR THREATENING WEATHER CONDITIONS AND LISTEN FOR LATER STATEMENTS AND POSSIBLE WARNINGS.

OTHER WATCH INFORMATION... CONTINUE...WW 378...WW 379...WW 380

DISCUSSION...THUNDERSTORMS ARE INCREASING OVER NE NM IN MOIST SOUTHEASTERLY UPSLOPE FLOW. OUTFLOW BOUNDARY EXTENDS EASTWARD INTO THE TEXAS PANHANDLE AND EXPECT STORMS TO MOVE ESE ALONG AND NORTH OF THE BOUNDARY ON THE N EDGE OF THE CAP. VEERING WINDS WITH HEIGHT ALONG WITH INCREASING MID LVL FLOW INDICATE A THREAT FOR SUPERCELLS.

December 1999

AVIATION...TORNADOES AND A FEW SEVERE THUNDERSTORMS WITH HAIL SURFACE AND ALOFT TO 2 ¾ INCHES. EXTREME TURBULENCE AND SURFACE WIND GUSTS TO 70 KNOTS. A FEW CUMULONIMBI WITH MAXIMUM TOPS TO 550. MEANS STORM MOTION VECTOR 28025.

Status reports are issued as needed to show progress of storms and to delineate areas no longer under the threat of severe storm activity. Cancellation bulletins are issued when it becomes evident that no severe weather will develop or that storms have subsided and are no longer severe.

When tornadoes or severe thunderstorms have developed, the local WFO office will issue the warnings covering those areas.

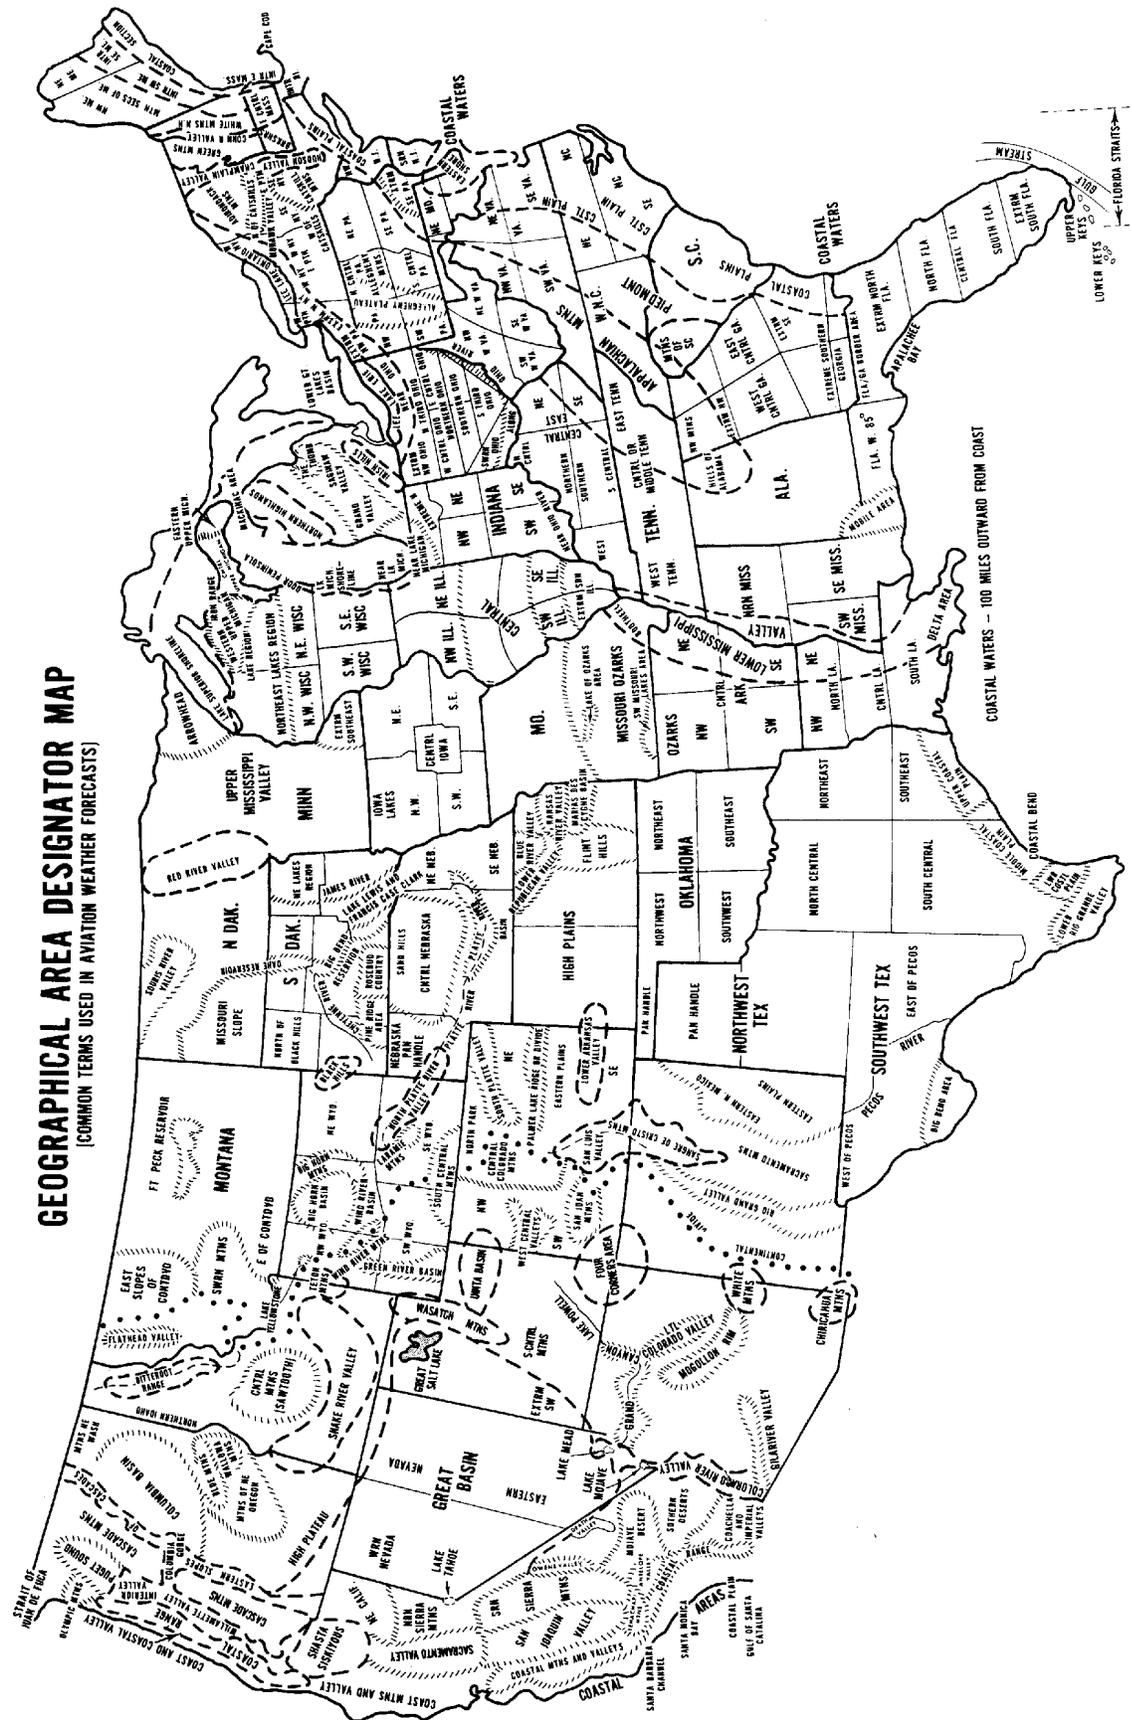


Figure 4-11. Geographical Areas and Terrain Features.

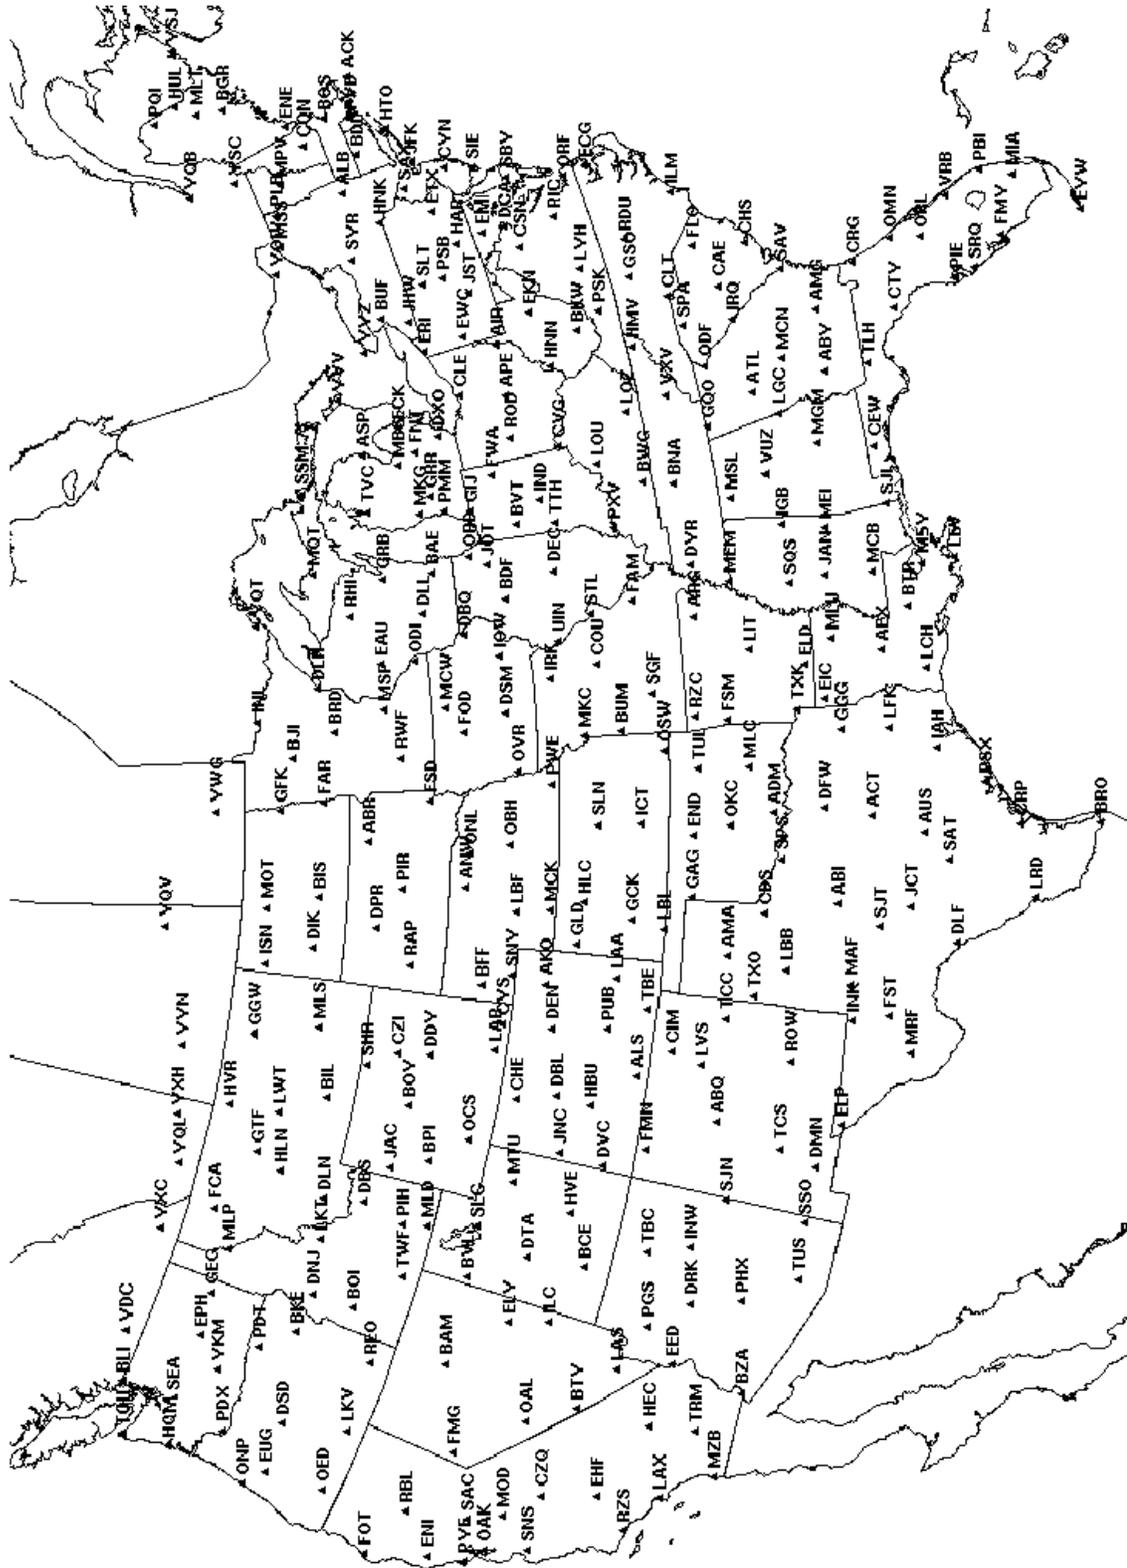


Figure 4-12. Inflight Advisory Plotting Chart.

## Section 5 SURFACE ANALYSIS CHART

The surface analysis chart is a computer-generated chart, with frontal analysis by HPC forecasters, transmitted every 3 hours covering the contiguous 48 states and adjacent areas. Figure 5-1 is a surface analysis chart, and Figure 5-2 illustrates the symbols depicting fronts and pressure centers.

### **VALID TIME**

Valid time of the chart corresponds to the time of the plotted observations. A date-time group in Universal Coordinated Time (UTC) tells the user when conditions portrayed on the chart occurred.

### **ISOBARS**

Isobars are solid lines depicting the sea-level pressure pattern and are usually spaced at intervals of 4 millibar (mb), or hectoPascals (hPa) in metric units (1 millibar = 1 hectoPascal). Each isobar is labeled. For example, 1032 signifies 1,032.0 mb (hPa); 1000 signifies 1,000.0 mb (hPa); and 992 signifies 992.0 mb (hPa).

### **PRESSURE SYSTEMS**

The letter “L” denotes a low pressure center, and the letter “H” denotes a high pressure center. The pressure of each center is indicated by a three- or four-digit number that is the central pressure in mb (hPa).

### **FRONTS**

The analysis shows positions and types of fronts by the symbols in Figure 5-2. The symbols on the front indicate the type of front and point in the direction toward which the front is moving. If the front has arrowhead-shaped symbols, it is a cold front. If the front has half-moon symbols, it is a warm front. A three-digit number near a front classifies it as to type (see Table 5-1), intensity (see Table 5-2), and character (see Table 5-3). A bracket ( [ or ] ) before or after the number “points” to the front to which the number refers. For example, in Figure 5-1, the front extends from eastern Montana into central North Dakota south through South Dakota and Nebraska into northwestern Kansas. The front is labeled “027” which means a quasi-stationary front (“0” from Table 5-1); weak, little, or no change (“2” from Table 5-2); and with waves (“7” from Table 5-3).

Two short lines across a front indicate a change in classification. In figure 5-1, note that two lines cross the front in central Montana (adjacent to the Low). To the left of the Low the front is numbered “450” which is a cold front; moderate, little, or no change; and no specification. The front to the right of the Low is numbered “027” which is a quasi-stationary front; weak, little, or no change; and with waves.

### **TROUGHS AND RIDGES**

A trough of low pressure with significant weather will be depicted as a thick, dashed line running through the center of the trough and identified with the word “TROF.” The symbol for a ridge of high pressure is very rarely, if at all, depicted (Figure 5-2).

## **OTHER INFORMATION**

The observations from a number of stations are plotted on the chart to aid in analyzing and interpreting the surface weather features. These plotted observations are referred to as station models. There are two primary types of station models plotted on the chart. Those with a round station symbol are observations taken by observers. The locations with a square station symbol indicate the sky cover was determined by an automated system. Other plotting models that appear over water on the chart are data from ships, buoys, and offshore oil platforms. Figure 5-3 is an example of a station model that shows where the weather information is plotted. Figures 5-4 through Figure 5-7 help explain the decoding of the station model.

An outflow boundary will be depicted as a thick, dashed line with the word “OUTBNDY.”

A dry line will be depicted as a line with unshaded pips or a through symbol. It will also be identified with the words “DRY LINE.”

A legend is printed on each chart stating its name, valid date and valid time.

## **USING THE CHART**

The surface analysis chart provides a ready means of locating pressure systems and fronts. It also gives an overview of winds, temperatures, and dew point temperatures at chart time. When using the chart, keep in mind that weather moves and conditions change. Using the surface analysis chart in conjunction with other information gives a more complete weather picture.

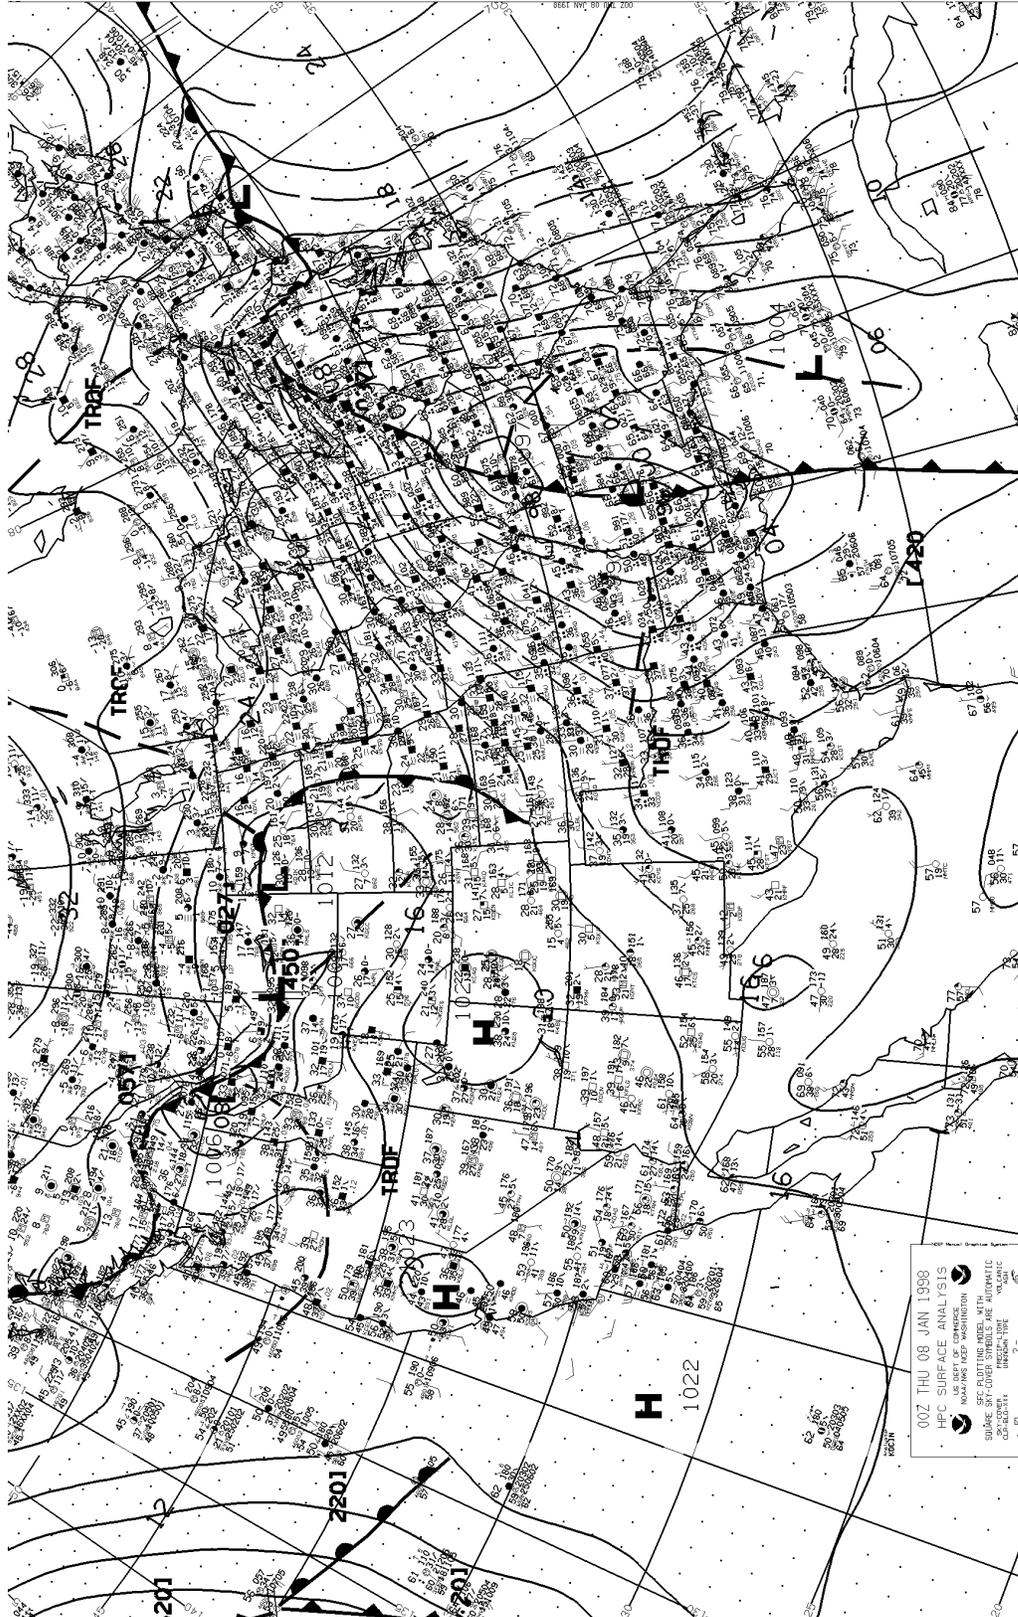


Figure 5-1. Surface Analysis Chart.




Color	Symbol	Description
Blue	H	High Pressure Center
Red	L	Low Pressure Center
Blue		Cold Front
Red		Warm Front
Red/Blue		Stationary Front
Purple		Occluded Front
Blue		Cold Frontogenesis
Red		Warm Frontogenesis
Red/Blue		Stationary Frontogenesis
Blue		Cold Frontolysis
Red		Warm Frontolysis
Red/Blue		Stationary Frontolysis
Purple		Occluded Frontolysis
Purple		Squall Line
Brown		Dryline
Brown		Trough
Yellow		Ridge

Figure 5-2. Symbols on Surface Analysis Chart.



1. Total sky cover: Overcast.
2. Temperature: 34 degrees F, Dew Point: 32 degrees F.
3. Wind: From the northwest at 20 knots (relative to true north).

### Examples of wind direction and speed

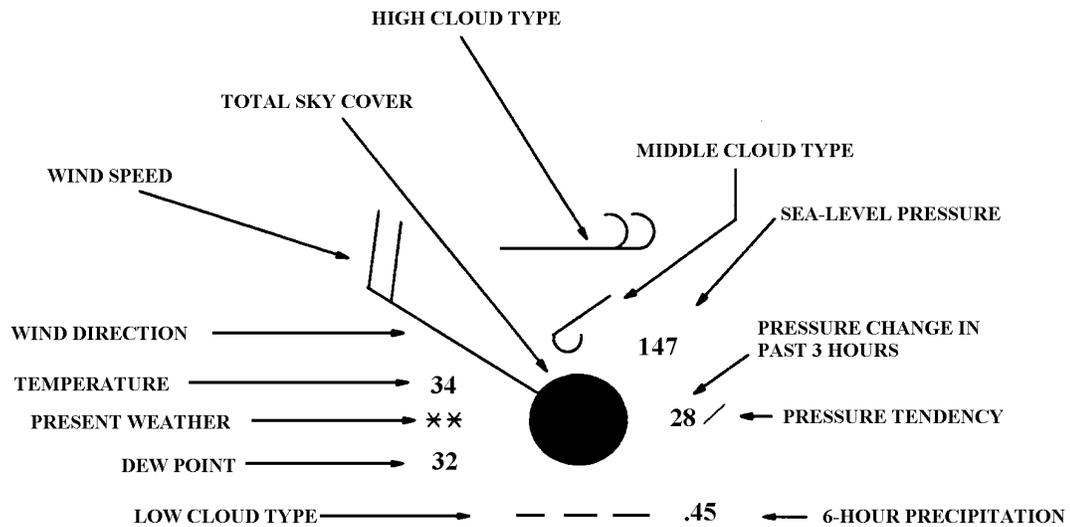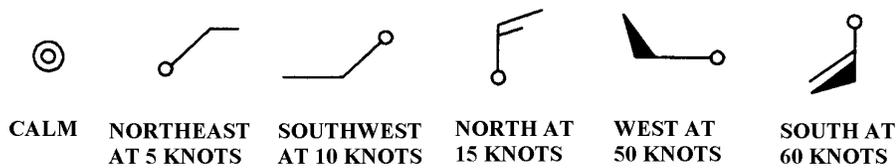

4. Present Weather: Continuous light snow.
5. Predominate low, middle, high cloud reported: Strato fractus or cumulus fractus of bad weather, altostratus in patches, and dense cirrus.
6. Sea-level pressure: 1,014.7 millibars (mbs).  
NOTE: Pressure is always shown in three digits to nearest tenth of an mb. For 1,000 mbs or greater, prefix a "10" to the three digits. For less than 1,000 mbs, prefix a "9" to the three digits.
7. Pressure change in the past 3 hours: Increased steadily or unsteadily by 2.8 mbs. The actual change is in tenths of a mb.
8. 6 - hour precipitation in hundredths of an inch: 45 hundredths of an inch.

Figure 5-3. Station Model and Explanation.

**Table 5-1. Type of Front**

<b>Code Figures</b>	<b>Descriptions</b>
<b>0</b>	<b>Quasi-stationary at surface</b>
<b>2</b>	<b>Warm front at surface</b>
<b>4</b>	<b>Cold front at surface</b>
<b>6</b>	<b>Occlusion</b>
<b>7</b>	<b>Instability line</b>

**Table 5-2. Intensity of Front**

<b>Code Figures</b>	<b>Descriptions</b>
<b>0</b>	<b>No specification</b>
<b>1</b>	<b>Weak, decreasing</b>
<b>2</b>	<b>Weak, little, or no change</b>
<b>3</b>	<b>Weak, increasing</b>
<b>4</b>	<b>Moderate, decreasing</b>
<b>5</b>	<b>Moderate, little, or no change</b>
<b>6</b>	<b>Moderate, increasing</b>
<b>7</b>	<b>Strong, decreasing</b>
<b>8</b>	<b>Strong, little, or no change</b>
<b>9</b>	<b>Strong, increasing</b>

**Table 5-3. Character of Front**

<b>Code Figures</b>	<b>Descriptions</b>
<b>0</b>	<b>No specification</b>
<b>5</b>	<b>Forming or existence expected</b>
<b>6</b>	<b>Quasi-stationary</b>
<b>7</b>	<b>With waves</b>
<b>8</b>	<b>Diffuse</b>

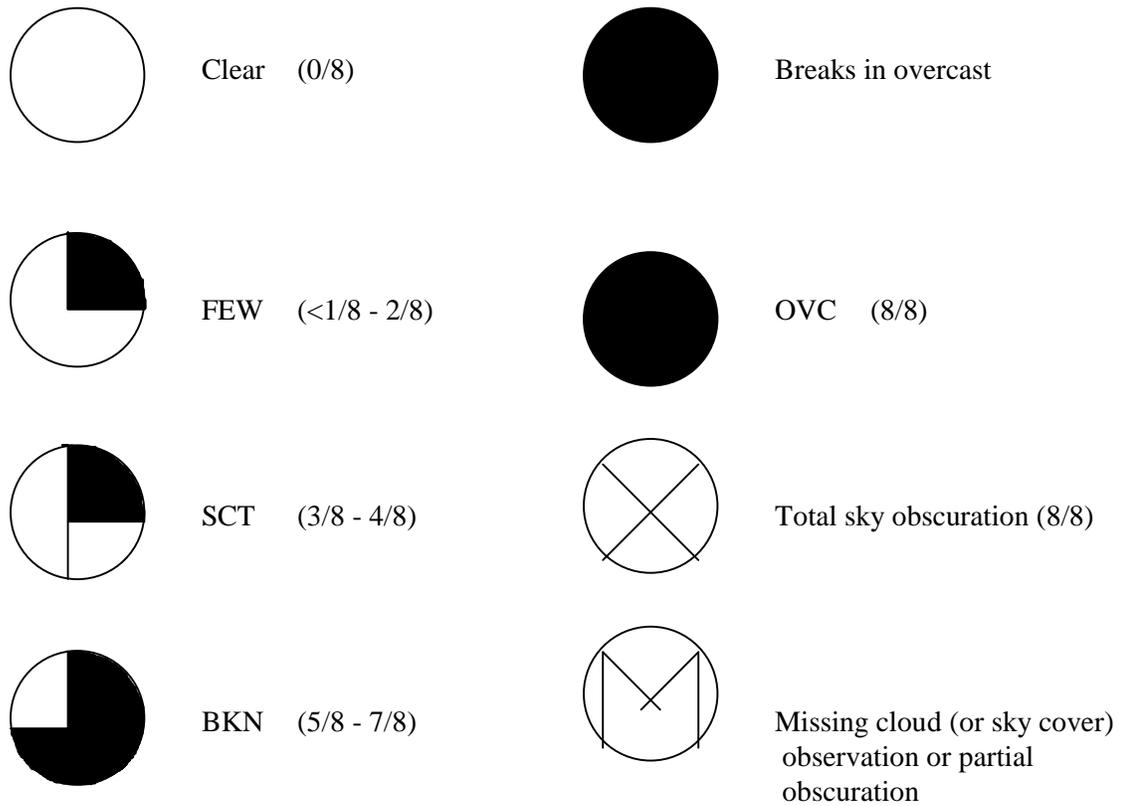


Figure 5-4. Sky Cover Symbols.

Description of Characteristic			
Primary Requirements	Additional Requirements	Graphic	Code Figure
<b>Higher</b>  Atmospheric pressure now higher than 3 hours ago.	Increasing, then decreasing		<b>0</b>
	Increasing, then steady; or		<b>1</b>
	Increasing, then increasing more slowly		
	Increasing; steadily or unsteadily		<b>2</b>
	Decreasing; or steady, then increasing; or  Increasing, then increasing more rapidly		<b>3</b>
<b>Same</b>  Atmospheric pressure now same as 3 hours ago.	Increasing, then decreasing		<b>0</b>
	Steady		<b>4</b>
	Decreasing, then increasing		<b>5</b>
<b>Lower</b>  Atmospheric pressure now lower than 3 hours ago.	Decreasing, then increasing		<b>5</b>
	Decreasing, then steady; or		<b>6</b>
	Decreasing, then decreasing more slowly		
	Decreasing; steadily or unsteadily		<b>7</b>
	Steady; or increasing, then decreasing; or  Decreasing, then decreasing more rapidly		<b>8</b>

Figure 5-5. Pressure Tendencies.

00		Cloud development NOT observed or NOT observable during past hour.
0		Clouds generally dissolving or becoming less developed during past hour.
1		Patches of shallow fog at station, NOT deeper than 6 feet on land.
2		State of the sky on shallow fog at station, NOT deeper than 6 feet on land.
3		Clouds generally forming or developing during past hour.
4		Lightning visible, no thunder heard.
5		Viability reduced by haze.
6		Widespread dust in suspension in the air, NOT at time of observation.
7		Dust or sand raised by wind at time of observation.
8		Well developed dust devil(s) within past hour.
9		Dust storm or sandstorm within sight of or at station during past hour.
10		Light fog.
20		Patches of shallow fog at station, NOT deeper than 6 feet on land.
30		Rain (NOT freezing and NOT falling as showers) during past hour, but NOT at time of observation.
40		Slight or moderate dust storm or sandstorm, has increased during past hour.
50		Severe dust storm or sandstorm, has increased during past hour.
60		Severe dust storm or sandstorm, no appreciable change during past hour.
70		Severe dust storm or sandstorm, has decreased during past hour.
80		Severe dust storm or sandstorm, no appreciable change during past hour.
90		Severe dust storm or sandstorm, has decreased during past hour.
0		Thunder heard, but no precipitation at the station.
1		Thunder heard, but no precipitation at the station.
2		Thunder heard, but no precipitation at the station.
3		Thunder heard, but no precipitation at the station.
4		Thunder heard, but no precipitation at the station.
5		Thunder heard, but no precipitation at the station.
6		Thunder heard, but no precipitation at the station.
7		Thunder heard, but no precipitation at the station.
8		Thunder heard, but no precipitation at the station.
9		Thunder heard, but no precipitation at the station.
10		Thunder heard, but no precipitation at the station.
20		Thunder heard, but no precipitation at the station.
30		Thunder heard, but no precipitation at the station.
40		Thunder heard, but no precipitation at the station.
50		Thunder heard, but no precipitation at the station.
60		Thunder heard, but no precipitation at the station.
70		Thunder heard, but no precipitation at the station.
80		Thunder heard, but no precipitation at the station.
90		Thunder heard, but no precipitation at the station.
0		Thunder heard, but no precipitation at the station.
1		Thunder heard, but no precipitation at the station.
2		Thunder heard, but no precipitation at the station.
3		Thunder heard, but no precipitation at the station.
4		Thunder heard, but no precipitation at the station.
5		Thunder heard, but no precipitation at the station.
6		Thunder heard, but no precipitation at the station.
7		Thunder heard, but no precipitation at the station.
8		Thunder heard, but no precipitation at the station.
9		Thunder heard, but no precipitation at the station.
10		Thunder heard, but no precipitation at the station.
20		Thunder heard, but no precipitation at the station.
30		Thunder heard, but no precipitation at the station.
40		Thunder heard, but no precipitation at the station.
50		Thunder heard, but no precipitation at the station.
60		Thunder heard, but no precipitation at the station.
70		Thunder heard, but no precipitation at the station.
80		Thunder heard, but no precipitation at the station.
90		Thunder heard, but no precipitation at the station.

Figure 5-6. Present Weather Symbols.

CLOUD ABBREVIATION	C L	DESCRIPTION (Abridged from W.M.O. Code)	C M	DESCRIPTION (Abridged from W.M.O. Code)	C H	DESCRIPTION (Abridged from W.M.O. Code)
St or Fs - Stratus or Fractostratus	1	Cu, fair weather, little vertical development and flattened		Thin As (most of cloud layer is semitransparent)	1	Filaments of Ci, or "mares tails," scattered and not increasing
	2	Cu, considerable development, towering with or without other Cu or Sc bases at same level		Thick As, greater part sufficiently dense to hide sun (or moon), or Ns	2	Dense Ci in patches or twisted sheaves, usually not increasing, sometimes like remains of Cb, or towers tufts
	3	Cb with tops lacking clearcut outlines, but distinctly not cirroform or anvil shaped; with or without Cu, Sc, or St		Thin Ac, mostly semitransparent; cloud elements not changing much at a single level	3	Dense Ci, often anvil shaped derived from or associated Cb
Cs - Cirrostratus	4	Sc formed by spreading out of Cu; Cu often present also		Thin Ac in patches; cloud elements continually changing and/or occurring at more than one level	4	Ci, often hook shaped gradually spreading over the sky and usually thickening as a whole
	5	Sc not formed by spreading out of Cu		Thin Ac in bands or in a layer gradually spreading over sky and usually thickening as a whole	5	Ci and Cs, often in converging bands or Cs alone; generally overspreading and growing denser; the continuous layer not reaching 45 altitude
As - Altostratus	6	St or Fs or both, but no Fs of bad weather		Ac formed by the spreading out of Cu	6	Ci and Cs, often in converging bands or Cs alone; generally overspreading and growing denser; the continuous layer exceeding 45 altitude
Sc - Stratocumulus	7	Fs and/or Fc of bad weather (scud)		Double-layered Ac, or a thick layer of Ac, not increasing; or Ac with As and/or Ns	7	Veil of Cs covering the entire sky
	8	Cu and Sc (not formed by spreading out of Cu) with bases at different levels		Ac in the form of Cu-shaped tufts or Ac with turrets	8	Cs not increasing and not covering the entire sky
Ns - Nimbostratus	9	Cb having a clearly fibrous (cirroform) top, often anvil shaped, with or without Cu, Sc, St, or scud		Ac of chaotic sky, usually at different levels; patches of dense Ci are usually present	9	Cc alone or Cc with some Ci or Cs but the Cc being the main cirroform cloud

Figure 5-7. Cloud Symbols.

**Section 6**  
**WEATHER DEPICTION CHART**

The weather depiction chart, Figure 6-3, is computer-generated (with human frontal analysis) from METAR reports. The weather depiction chart gives a broad overview of the observed flying category conditions at the valid time of the chart. This chart begins at 01Z each day, is transmitted at 3-hours intervals, and is valid at the time of the plotted data.

**PLOTTED DATA**

Observations reported by both manual and automated observation locations provide the data for the chart. The right bracket ( ] ) indicates the present weather information was obtained by an automated system only. The plotted data for each station are total sky cover, cloud height or ceiling, weather and obstructions to vision, and visibility. If the stations on the chart are crowded together, the weather, visibility, and cloud height may be moved up to 90 degrees around the station for better legibility. When reports are frequently updated, as at some automatic stations (every 20 minutes) or when the weather changes significantly, the observation used is the latest METAR received instead of using the one closest to the stated analysis time.

**TOTAL SKY COVER**

The amount of sky cover is shown by the station circle shaded as in Figure 6-1.

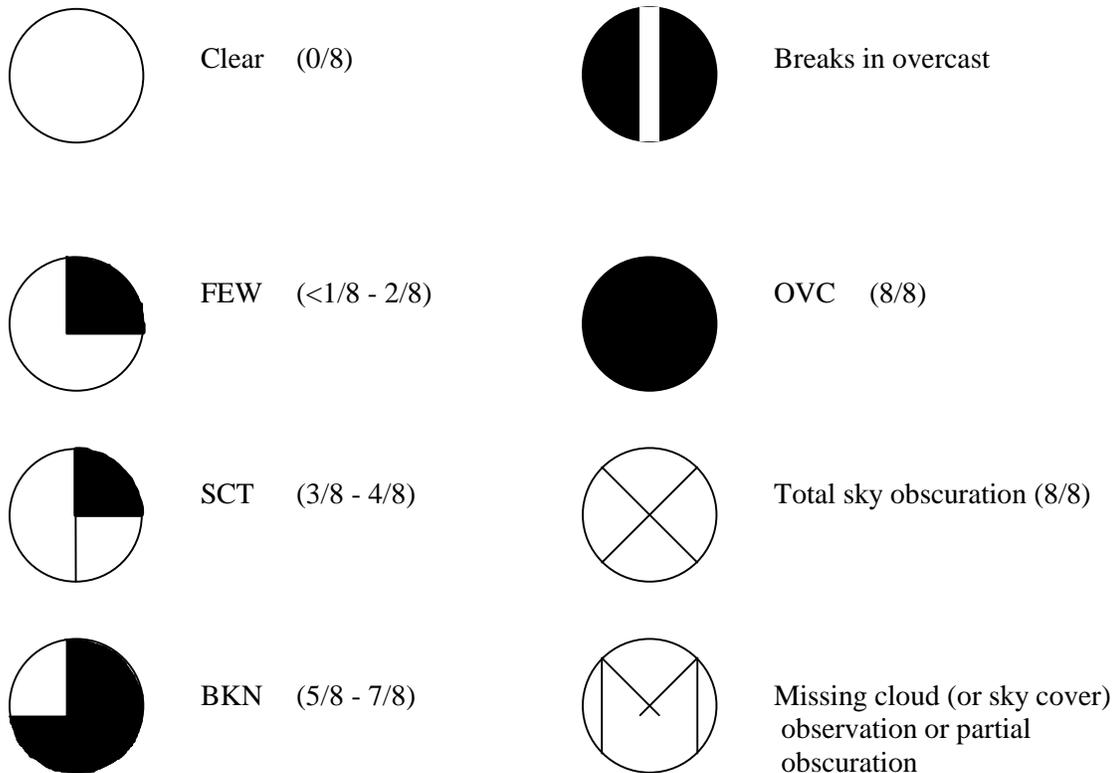


Figure 6-1. Total Sky Cover.

## **CLOUD HEIGHT**

Cloud height above ground level (AGL) is entered under the station circle in hundreds of feet; the same as coded in a METAR report. If total sky cover at a station is scattered, the cloud height entered is the base of the lowest scattered cloud layer. If total sky cover is broken or greater at a station, the cloud height entered is the lowest broken or overcast cloud layer. A totally obscured sky is shown by the sky cover symbol "X" and is accompanied by the height entry of the obscuration (vertical visibility into the obscuration). A partially obscured sky without a cloud layer above, however, is not recognized by the computer program reading the METAR report. It cannot differentiate between a partial obscuration and a missing observation. Therefore, the computer program will enter an "M" in the sky cover circle for either occurrence. Consequently, the user will not know if the observation is missing or a partial obscuration is present. To obtain the most accurate information, the user must consult the METAR report for that specific station. A partially obscured sky with clouds above will have a cloud height entry for the cloud layer, but there will be no entry to indicate that there is a partial obscuration at the surface. So once again the user must consult the METAR report to obtain the most accurate information.

## **WEATHER AND OBSTRUCTIONS TO VISIBILITY**

Weather and obstructions to visibility symbols are entered to the left of the station circle. Figure 5-6 explains most of the symbols used. When several types of weather and/or obstructions to visibility are reported at a station, the first one reported in the METAR would usually be the highest coded number in Figure 5-6. Also, for some stations that are not ordinarily plotted, the weather symbol is plotted only if the weather is significant, such as a thunderstorm.

## **VISIBILITY**

When visibility is 5 miles or less, it is entered to the left of the weather or obstructions to vision symbol. Visibility is entered in statute miles and fractions of a mile.

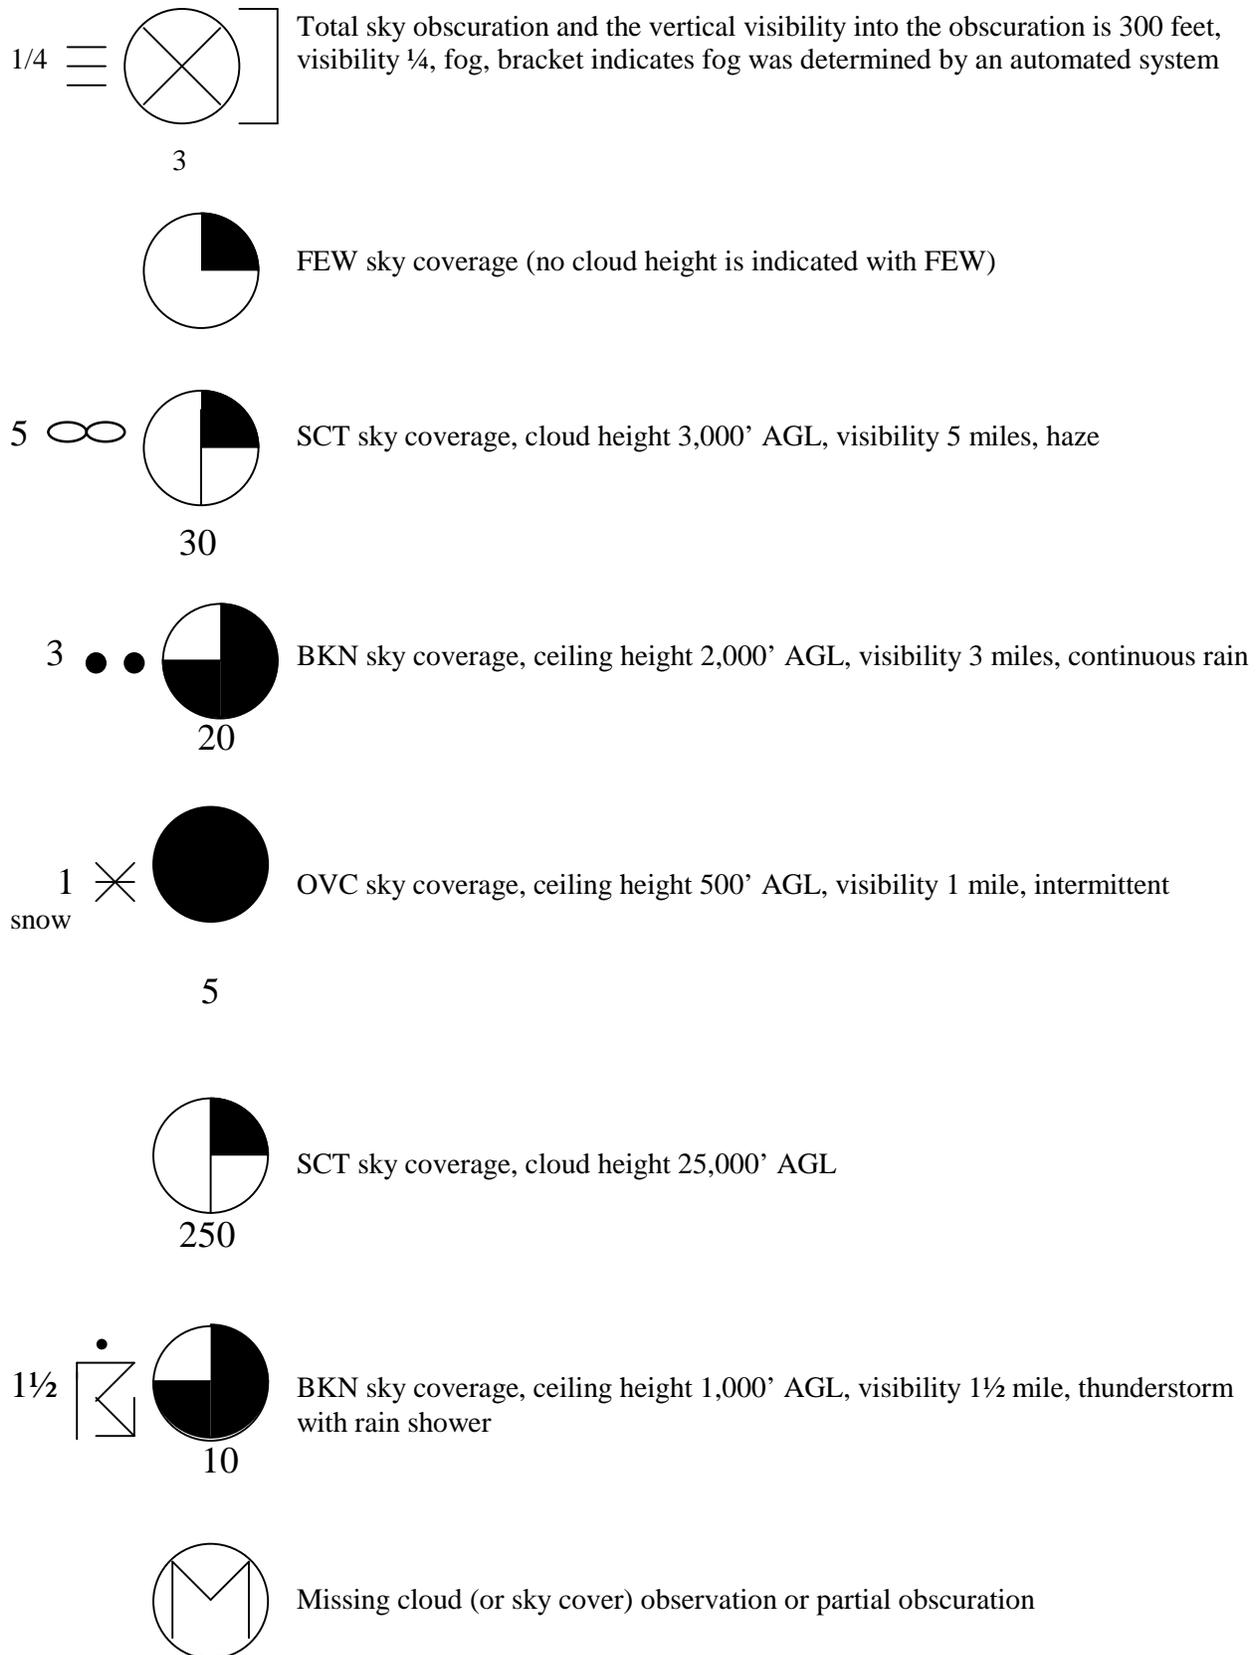


Figure 6-2. Examples of Plotting on the Weather Depiction Chart.

## **ANALYSIS**

The chart shows observed ceiling and visibility by categories as follows:

IFR - Ceiling less than 1,000 feet and/or visibility less than 3 miles; hatched area outlined by a smooth line.

MVFR (Marginal VFR) - Ceiling 1,000 to 3,000 feet inclusive and/or visibility 3 to 5 miles inclusive; non-hatched area outlined by a smooth line.

VFR - No ceiling or ceiling greater than 3,000 feet and visibility greater than 5 miles; not outlined.

The three categories are also explained in the lower right portion of the chart for quick reference. In addition, the chart shows fronts and troughs from the surface analysis for the preceding hour (with one exception being that fronts and troughs are omitted on the 10Z and 23Z charts). These features are depicted the same as the surface chart.

Because space on the chart is limited, only about half the METAR reports are plotted on the chart. The areas for each flight category are determined using all available reports whether or not they are plotted.

## **USING THE CHART**

The weather depiction chart is an ideal place to begin preparing for a weather briefing and flight planning. From this chart, one can get a “bird’s eye” view of areas of favorable and adverse weather conditions for chart time. This chart may not completely represent the en route conditions because of variations in terrain and possible weather occurring between reporting stations. Due to the delay between data and transmission time, changes in the weather could occur. One should update the chart with current METAR reports. After initially sizing up the general weather picture, final flight planning must consider forecasts, progs, and the latest pilot, radar, and surface weather reports.



**Section 7**  
**RADAR SUMMARY CHART**

A radar summary chart (Figure 7-1) is a computer-generated graphical display of a collection of automated radar weather reports (SDs). This chart displays areas of precipitation as well as information about type, intensity, configuration, coverage, echo top, and cell movement of precipitation. Severe weather watches are plotted if they are in effect when the chart is valid. The chart is available hourly with a valid time of H+35; i.e., 35 minutes past each hour. Figure 7-2 depicts the WSR-88D radar network from which the radar summary chart is developed.

**ECHO (PRECIPITATION) TYPE**

The types of precipitation are indicated on the chart by symbols located adjacent to precipitation areas on the chart. Table 7-1 lists the symbols used to denote types of precipitation. Note that these symbols do not reflect the change to METAR. Since the input data for the radar summary chart are the automated SDs, the type of precipitation is determined by computer models and is limited to the ones listed in Table 7-1.


**Table 7-1 Key to Radar Chart**

<b><u>Symbols Used on Chart</u></b>			
<b><u>Symbol Meaning</u></b>		<b><u>Symbol Meaning</u></b>	
<b>R</b>	<b>Rain</b>		<b>Cell movement to the northeast at 35 knots</b>
<b>RW</b>	<b>Rain shower</b>	<b>LM</b>	<b>Little movement</b>
<b>S</b>	<b>Snow</b>		<b>Severe thunderstorm watch number 999</b>
<b>SW</b>	<b>Snow shower</b>		<b>Tornado watch number 210</b>
<b>NA</b>	<b>Not available</b>		<b>8/10 or greater coverage in a line</b>
<b>NE</b>	<b>No echoes</b>		<b>Line of echoes</b>
<b>OM</b>	<b>Out for maintenance</b>		

**INTENSITY**

The intensity is obtained from the amount of energy returned to the radar from the target and is indicated on the chart by contours. Six precipitation intensity levels are reduced into three contour intervals as indicated in Table 7-2. In Figure 7-1, over central Montana is an area of precipitation depicted by one contour. The intensity of the precipitation area would be light to possibly moderate. Whether there is moderate precipitation in the area cannot be determined. However, what can be said is that the maximum intensity is definitely below heavy. When determining intensity levels from this chart, it is recommended that the maximum possible intensity be used. To determine the actual maximum intensity level, the SD for that time period should be examined. It should also be noted that intensity is coded for frozen precipitation (i.e., snow or snow showers). This is due to the fact that the WSR-88D is much more powerful and sensitive than previous radars. Finally, it is very important to remember that the intensity trend is no longer coded on the radar summary chart.

**Table 7-2 Precipitation Intensities**

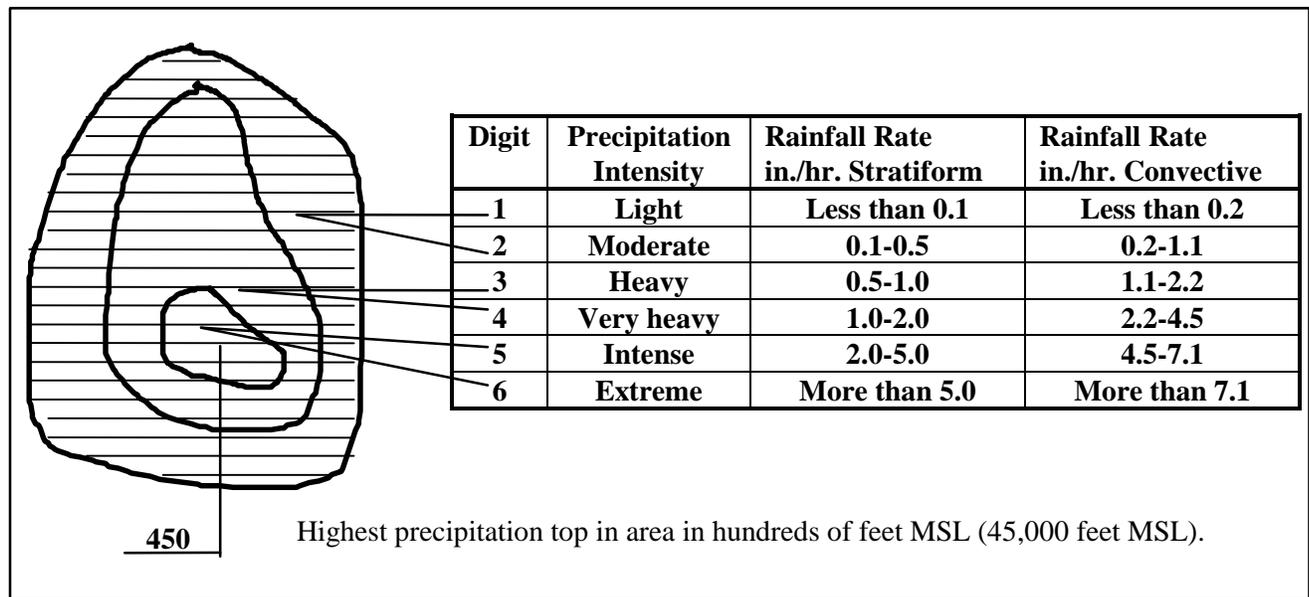

**ECHO CONFIGURATION AND COVERAGE**

The configuration is the arrangement of echoes. There are three designated arrangements: a LINE of echoes, an AREA of echoes, and an isolated CELL. (See Radar Weather Reports in Section 3 for definitions of the three configurations.)

Coverage is simply the area covered by echoes. All the hatched area inside the contours on the chart is considered to be covered by echoes. When the echoes are reported as a LINE, a line will be drawn through them on the chart. Where there is 8/10 coverage or more, the line is labeled as solid (SLD) at both ends. In the absence of this label, it can be assumed that there is less than 8/10 coverage. For example, in Figure 7-1, there is a solid line of thunderstorms with intense to extreme rain showers over central Georgia.

## **ECHO TOPS**

Echo tops are obtained from both radar and, on occasion, satellite data and displayed for precipitation tops. Echo tops are the maximum heights of the precipitation in hundreds of feet MSL. They should be considered only as approximations because of radar wave propagation limitations. Tops are entered above a short line, with the top height displayed being the highest in the indicated area.

Examples:

220: maximum top 22,000 feet

500: Maximum top 50,000 feet

It is assumed that all precipitation displayed on the chart is reaching the surface. Some examples of top measurements in Figure 7-1 include a top of 15,000 feet MSL over northeast Washington; 23,000 feet over north-central Texas; and 32,000 feet MSL in central Georgia.

## **ECHO MOVEMENT**

Individual cell movement is indicated by an arrow with the speed in knots entered as a number at the top of the arrow head. Little movement is identified by **LM**. For example, in Figure 7-1, the precipitation over north-central Texas is moving southwest at 8 knots. The precipitation in New England area is moving east-northeast at 25 knots. Line or area movement is no longer indicated on the chart.

## **SEVERE WEATHER WATCH AREAS**

Severe weather watch areas are outlined by heavy dashed lines, usually in the form of a large rectangular box. There are two types - tornado watches and severe thunderstorm watches. Referring to Figure 7-1 and Table 7-1, the type of watch and the watch number are enclosed in a small rectangle and positioned as closely as possible to the northeast corner of the watch box. For example, in Figure 7-1, the boxed “WS0005” in northeast Georgia and western South Carolina is a severe thunderstorm watch and is the 5<sup>th</sup> severe thunderstorm watch issued so far in the year. The watch number is also printed at the bottom of the chart (in Mexico) together with the issuance time and expiration time.

## **USING THE CHART**

The radar summary chart aids in preflight planning by identifying general areas and movement of precipitation and/or thunderstorms. This chart displays drops or ice particles of precipitation size only; it does not display clouds and fog. Therefore, the absence of echoes does not guarantee clear weather, and cloud tops will most likely be higher than the tops of the precipitation echoes detected by radar. The chart must be used in conjunction with other charts, reports, and forecasts.

Examine chart notations carefully. Always determine location and movement of echoes. If echoes are anticipated near the planned route, take special note of echo intensity. Be sure to examine the chart for missing radar reports before assuming “no echoes present.” For example, the Rapid City (RAP) radar report in western South Dakota is shown as “not available (NA).”

Suppose the planned flight route goes through an area of widely scattered thunderstorms in which no increase in area is anticipated. If these storms are separated by good VFR weather, they can be visually sighted and circumnavigated. However, widespread cloudiness may conceal the thunderstorms. To avoid these embedded thunderstorms, either use airborne radar or detour the area.

Remember that the radar summary chart is for preflight planning only and should be updated by current WSR-88D images and hourly reports. Once airborne, the pilot must evade individual storms by inflight

December 1999

observations. This can be done by using visual sighting or airborne radar as well as by requesting radar echo information from Automated Flight Service Station (AFSS) Flight Watch. The AFSS Flight Watch has access to current WSR-88D imagery.

There can be an interpretation problem concerning an area of precipitation that is reported by more than one radar site. For example, station A may report RW with cell movement toward the northeast at 10 knots. For the same area, station B may be reporting TRW with cell movement toward the northeast at 30 knots. This difference in reports may be due to a different perspective and distance of the radar site from the area of echoes. The area may be moving away from station A and approaching station B. The rule of thumb is to use that plotted data associated with the area that presents the greatest hazard to aviation. In this case, the station B report would be used.





## **Section 8**

### **CONSTANT PRESSURE ANALYSIS CHARTS**

Weather information for computer generated constant pressure charts is observed primarily by balloon-ascending radiosonde packages. Each package consists of weather instruments and a radio transmitter. During ascent instrument data are continuously transmitted to the observation station. Radiosondes are released at selected observational sites across the USA at 00Z and 12Z. The data collected from the radiosondes are used to prepare constant pressure charts twice a day.

Constant pressure charts are prepared for selected values of pressure and present weather information at various altitudes. The standard charts prepared are the 850 mb (hPa), 700 mb (hPa), 500 mb (hPa), 300 mb (hPa), 250 mb (hPa), and 200 mb (hPa) charts. Charts with higher pressures present information at lower altitudes, and charts with lower pressures present information at higher altitudes. Table 8-1 lists the general altitude (pressure altitude) of each constant pressure chart.

#### **PLOTTED DATA**

Data from each observation station are plotted around a station circle on each constant pressure chart. The circle identifies the station position. The data plotted on each chart are temperature, temperature-dew point spread, wind, height of the surface above sea level, and height change of the surface over the previous 12-hour period. The temperature and spread are in degrees Celsius, wind direction is relative to true north, wind speed is in knots, and height and height change are in meters. The station circle is shaded black when the spread is 5 degrees or less (moist atmosphere), and open when spread is more than 5 degrees (dry atmosphere). Figure 8-1 illustrates a station model of the radiosonde data plot. Table 8-2 gives station data plot examples for each constant pressure chart.

Aircraft and satellite observations are also used as information sources for constant pressure charts. A square is used to identify an aircraft reporting position. Data plotted are the flight level of the aircraft in hundreds of feet, temperature, wind, and time to the nearest hour UTC. A star is used to identify a satellite reporting position. Satellite information is determined by identifying cloud drift and height of cloud tops. Data plotted are the flight level in hundreds of feet, time to the nearest hour UTC, and wind. Aircraft and satellite data are plotted on the constant pressure chart closest to their reporting altitudes. Aircraft and satellite information are particularly useful over sparse radiosonde data areas.

#### **ANALYSIS**

All constant pressure charts contain analyses of height and temperature variations. Also, selected charts have analyses of wind speed variations. Variations of height are analyzed by contours, variations of temperature by isotherms, and variations of wind speed by isotachs.

#### **CONTOURS**

Contours are lines of constant height, in meters, which are referenced to mean sea level. Contours are used to map the height variations of surfaces that fluctuate in altitude. They identify and characterize pressure systems on constant pressure charts.

Contours are drawn as solid lines on constant pressure charts and are identified by a three-digit code located on each contour. To determine the contour height value, affix "zero" to the end of the code. For example, a contour with a "315" code on the 700 mb/hPa chart identifies the contour value as 3,150 meters. Also, affix a "one" in front of the code on all 200 mb/hPa contours and on 250 mb/hPa contours when the code begins with zero. For example, a contour with a "044" code on a 250 mb/hPa chart identifies the contour value as 10,440 meters.

The contour interval is the height difference between analyzed contours. A standard contour interval is used for each chart. The contour intervals are 30 meters for the 850 and 700 mb (hPa) charts, 60 meters for the 500 mb (hPa) chart, and 120 meters for the 300, 250, and 200 mb (hPa) charts.

The contour gradient is the distance between analyzed contours. Contour gradients identify slopes of surfaces that fluctuate in altitude. Strong gradients are closely spaced contours and identify steep slopes. Weak gradients are widely spaced contours and identify shallow slopes.

The contour analysis displays height patterns. Common types of patterns are lows, highs, troughs, and ridges. Contours have curvature for each of these patterns. Contour patterns can be further characterized by size and intensity. Size represents the breadth of a system. Sizes can range from large to small. A large pattern is generally more than 1,000 miles across, and a small pattern is less than 1,000 miles across. Intensities can range from strong to weak. Stronger systems are depicted by contours with stronger gradients and sharper curvatures. Weaker systems are depicted by contours with weaker gradients and weaker curvatures. For example, a chart may have a large, weak high, or a small, strong low.

Contour patterns on constant pressure charts can be interpreted the same as isobar patterns on the surface chart. For example, an area of low height is the same as an area of low pressure.

Winds respond to contour patterns and gradients. Wind directions parallel contours. In the Northern Hemisphere, when looking downwind, contours with relatively lower heights are to the left and contours with relatively higher heights are to the right. Thus, winds flow counterclockwise (cyclonically) around lows and clockwise (anticyclonically) around highs. (In the Southern Hemisphere these directions are reversed.) Winds that rotate are termed circulations. Wind speeds are faster with stronger gradients and slower with weaker gradients. In mountainous areas, winds are variable on pressure charts with altitudes at or below mountain crests. Contours have the effect of "channeling" the wind.

## **ISOTHERMS**

Isotherms are lines of constant temperature. An isotherm separates colder air from warmer air. Isotherms are used to map temperature variations over a surface.

Isotherms are drawn as bold, dashed lines on constant pressure charts. Isotherm values are identified by a two-digit block on each line. The two digits are prefaced by "+" for above-freezing values as well as the zero isotherm and "-" for below-freezing values. Isotherms are drawn at 5-degree intervals on each chart. The zero isotherm separates above-freezing and below-freezing temperatures.

Isotherm gradients identify the magnitude of temperature variations. Strong gradients are closely spaced isotherms and identify large temperature variations. Weak gradients are loosely spaced isotherms and identify small temperature variations.

## **ISOTACHS**

Isotachs are lines of constant wind speed. Isotachs separate higher wind speeds from lower wind speeds. Isotachs are used to map wind speed variations over a surface. Isotachs are analyzed on the 300, 250, and 200 mb (hPa) charts.

Isotachs are drawn as short, fine dashed lines. Isotach values are identified by a two- or three-digit number followed by a "K" located on each line. Isotachs are drawn at 20-knot intervals and begin at 10 knots.

Isotach gradients identify the magnitude of wind speed variations. Strong gradients are closely spaced isotachs and identify large wind speed variations. Weak gradients are loosely spaced isotachs and identify small wind speed variations.

Zones of very strong winds are highlighted by hatches. Hatched and unhatched areas are alternated at 40-knot intervals beginning with 70 knots. Areas between the 70- and 110-knot isotachs are hatched. Areas between the 110- and 150-knot isotachs are unhatched. This alternating pattern is continued until the strongest winds on the chart are highlighted. Highlighted isotachs assist in the identification of jet streams.

## **THREE-DIMENSIONAL ASPECTS**

It is important to assess weather in both the horizontal and vertical dimensions. This not only applies to clouds, precipitation, and other significant conditions, but also pressure systems and winds. The characteristics of pressure systems vary horizontally and vertically in the atmosphere.

The horizontal distribution of pressure systems is depicted by the constant pressure charts and the surface chart (Section 5.) Pressure systems appear on each pressure chart as pressure patterns. Pressure charts identify and characterize pressure systems by their location, type, size, and intensity.

The vertical distribution of pressure systems must be determined by comparing pressure patterns on vertically adjacent pressure charts. For example, compare the surface chart with the 850 mb/hPa chart, 850 mb/hPa with 700 mb/hPa, and so forth. Changes of pressure patterns with height can be in the form of position, type, size, or intensity.

The three-dimensional assessment of pressure systems infers the assessment of the three-dimensional variations of wind.

## **USING THE CHARTS**

Constant pressure charts are used to provide an overview of selected observed en route flying conditions. Use all pressure charts for a general overview of conditions.


Select the chart closest to the desired flight altitude for assessment of en route conditions. Review the winds along the route. Consider their direction and speed. For high altitude flights, identify jet stream positions. Note whether pressure patterns cause significant wind shifts or speed changes. Determine if these winds will be favorable or unfavorable (tailwind, headwind, crosswind.) Consider vertically adjacent charts and determine if a higher or lower altitude would have a more desirable en route wind. Interpolate winds between charts for flights between chart levels. Review other conditions along the

route. Evaluate temperatures by identifying isotherm values and patterns. Evaluate areas with moist air and cloud potential by identifying station circles shaded black.

Consider the potential for hazardous flight conditions. Evaluate the potential for icing. Freezing temperatures and visible liquid forms of moisture produce icing. Evaluate the potential for turbulence. In addition to convective conditions and strong surface winds, turbulence is also associated with wind shear and mountain waves. Wind shear occurs with strong curved flow and speed shear. Strong lows and troughs and strong isotach gradients are indicators of strong shear. Vertical wind shear can be identified by comparing winds on vertically adjacent charts. Mountain waves are caused by strong perpendicular flow across mountain crests. Use winds on the pressure charts near mountain crest level to evaluate mountain wave potential.

Pressure patterns cause and characterize much of the weather. As a general rule, lows and troughs are associated with clouds and precipitation, while highs and ridges are associated with good weather. However, this rule is more complicated when pressure patterns change with height. Compare pressure pattern features on the various pressure charts with other weather charts, such as the weather depiction and radar summary charts. Note the association of pressure patterns on each chart with the weather.

Pressure systems, winds, temperature, and moisture change with time. For example, pressure systems move, change size, and change intensity. Forecast products predict these changes. Compare observed conditions with forecast conditions and be aware of these changes.

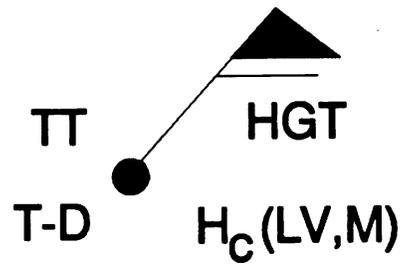

Code	Explanation
WIND:	Plotted wind direction and speed by symbol. Direction is to the nearest 10 degrees and speed is to the nearest 5 knots. (See Figure 5-3 for the explanation of the symbols.) If the direction or speed is missing, the wind symbol is omitted and an "M" is plotted in the H <sub>c</sub> space. If speed is less than 3 knots, the wind is light and variable, the wind symbol is omitted, and an "LV" is plotted in the H <sub>c</sub> space.
HGT:	Plotted height of the constant pressure surface in meters above mean sea level. (See Table 8-1 for decoding.) If data is missing, nothing is plotted in this position.
TT:	Plotted temperature to the nearest whole degree Celsius. A below-zero temperature is prefaced with a minus sign. Position is left blank if data is missing. A bracketed computer-generated temperature is plotted on the 850 mb/hPa chart in mountainous regions when stations have elevations above the 850 mb/hPa pressure level. If two temperatures are plotted, one above the other, the top temperature is used in the analysis.
T-D:	Plotted temperature-dew point spread to the nearest whole degree Celsius. An "X" is plotted when the air is extremely dry. The position is left blank when the information is missing.
H <sub>c</sub> :	Plot of constant pressure surface height change which occurred during the previous 12 hours in tens of meters. For example, a +04 means the height of the surface rose 40 meters and a -12 means the height fell by 120 meters. H <sub>c</sub> data is superseded by "LV" or "M" when pertinent.
CIRCLE:	Identifies station position. Shaded black when T-D spread is 5 degrees or less (moist). Unshaded when spread is more than 5 degrees.

Figure 8-1. Radiosonde Data Station Plot.






Table 8-1 Features of the Constant Pressure Charts - U.S.

Pressure (millibars/hectoPascals)	Pressure Altitude in feet (flight level)	Pressure Altitude in meters	Temperature/ Dew Point Spread	Isotachs	Contour Interval (meters)	Decode Station Height Plot		Examples of Station Height Plotting	
						Prefix to Plotted Value	Suffix to Plotted Value	Plotted	Height
850	5,000	1,500	yes	no	30	1	—	530	1,530
700	10,000	3,000	yes	no	30	2 or 3*	—	180	3,180
500	18,000	5,500	yes	no	60	—	0	582	5,820
300	30,000	9,000	yes**	yes	120	—	0	948	9,480
250	34,000	10,500	yes**	yes	120	1	0	063	10,630
200	39,000	12,000	yes**	yes	120	1	0	164	11,640

NOTE:

1. The pressure altitudes are rounded to the nearest 1,000 for feet and to the nearest 500 for meters.
2. All heights are above mean sea level (MSL).
3. \* Prefix a “2” or “3,” whichever brings the height closer to 3,000 meters.
4. \*\* Omitted when the air is too cold (temperature less than -41 degrees).

Table 8-2 Examples of Radiosonde Plotted Data

						
	<b>850 mb</b>	<b>700 mb</b>	<b>500 mb</b>	<b>300 mb</b>	<b>250 mb</b>	<b>200 mb</b>
<b>WIND</b>	<b>light and variable</b>	<b>010/20 KTS</b>	<b>210/60 KTS</b>	<b>270/25 KTS</b>	<b>240/30 KTS</b>	<b>missing</b>
<b>TT</b>	<b>22° C</b>	<b>9° C</b>	<b>-19° C</b>	<b>-46° C</b>	<b>-55° C</b>	<b>-60° C</b>
<b>T-D</b>	<b>4° C</b>	<b>17° C</b>	<b>&gt;29° C</b>	<b>not plotted</b>	<b>not plotted</b>	<b>not plotted</b>
<b>DEW POINT</b>	<b>18° C</b>	<b>-8° C</b>	<b>dry</b>	<b>dry</b>	<b>dry</b>	
<b>HGT</b>	<b>1,479 m</b>	<b>3,129 m</b>	<b>5,580 m</b>	<b>9,190 m</b>	<b>10,370 m</b>	<b>11,910 m</b>
<b>H<sub>c</sub></b>	<b>not plotted</b>	<b>- 30 m</b>	<b>+ 30 m</b>	<b>+ 100 m</b>	<b>- 10 m</b>	<b>not plotted</b>

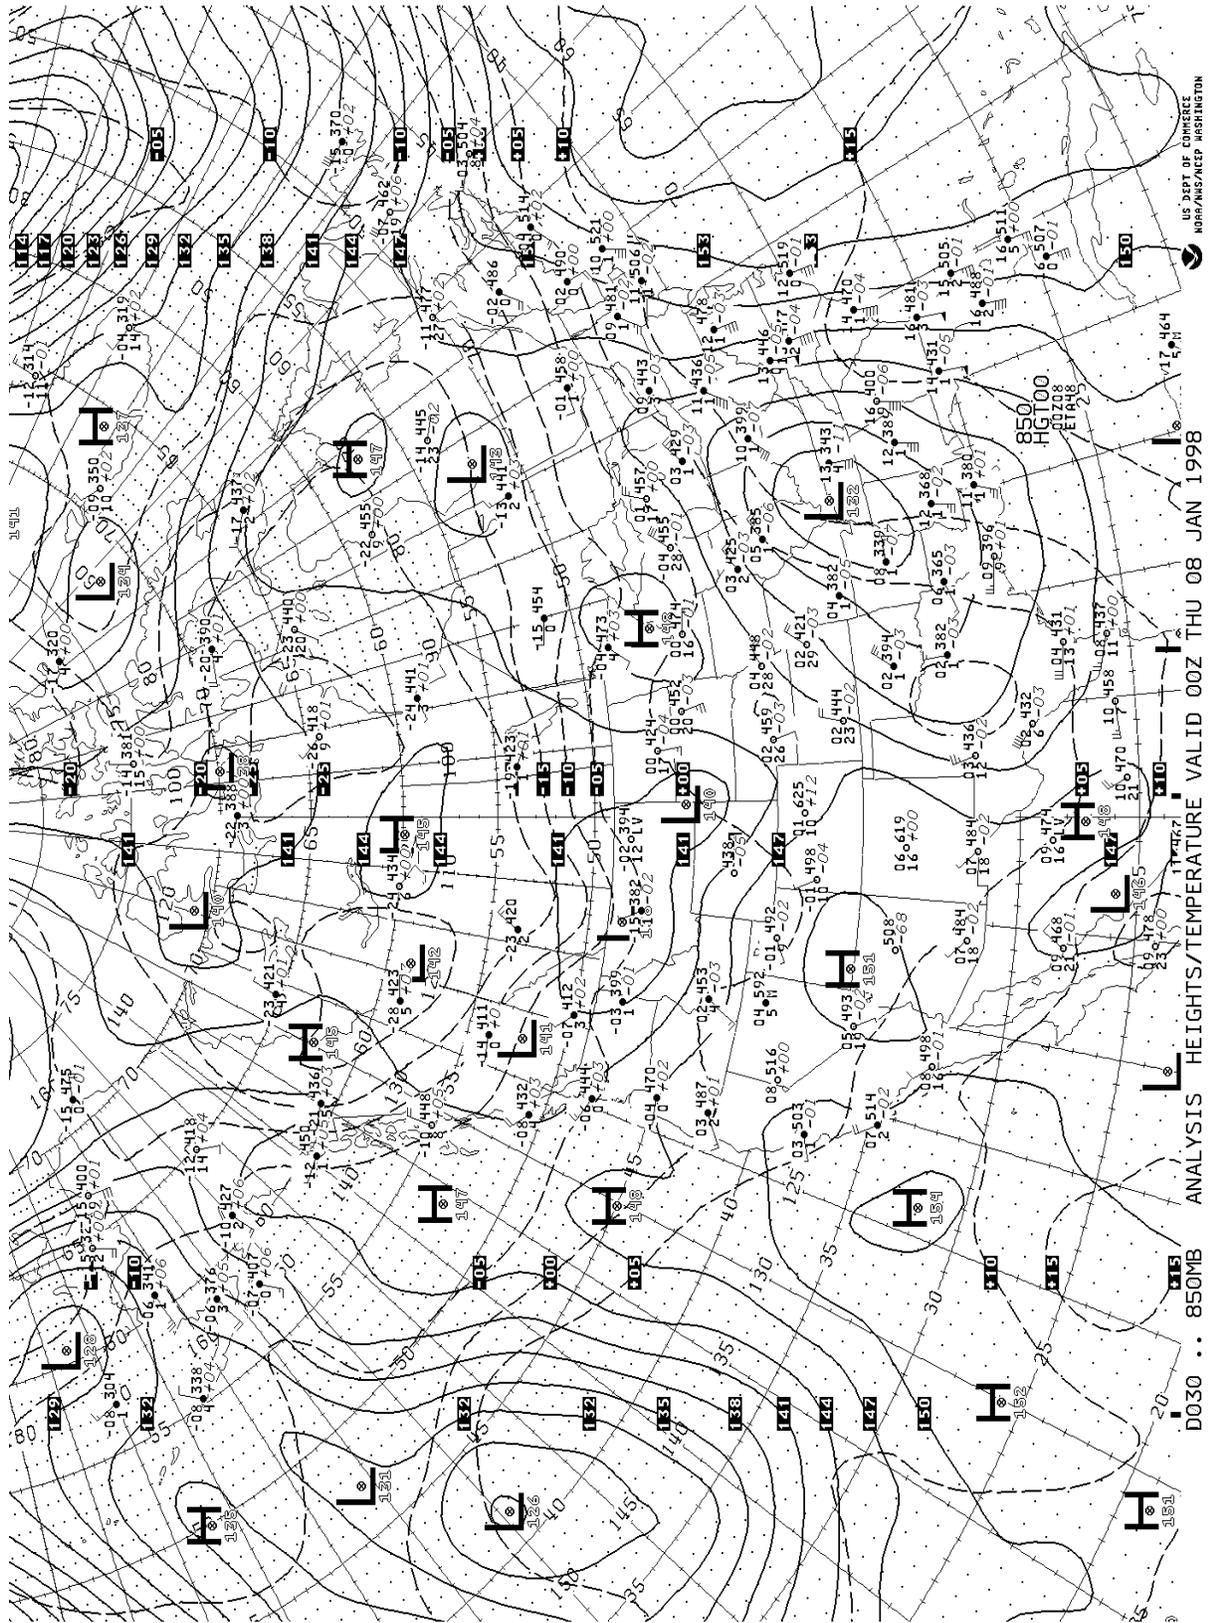


Figure 8-2. 850 Millibar/HectoPascal Analysis.

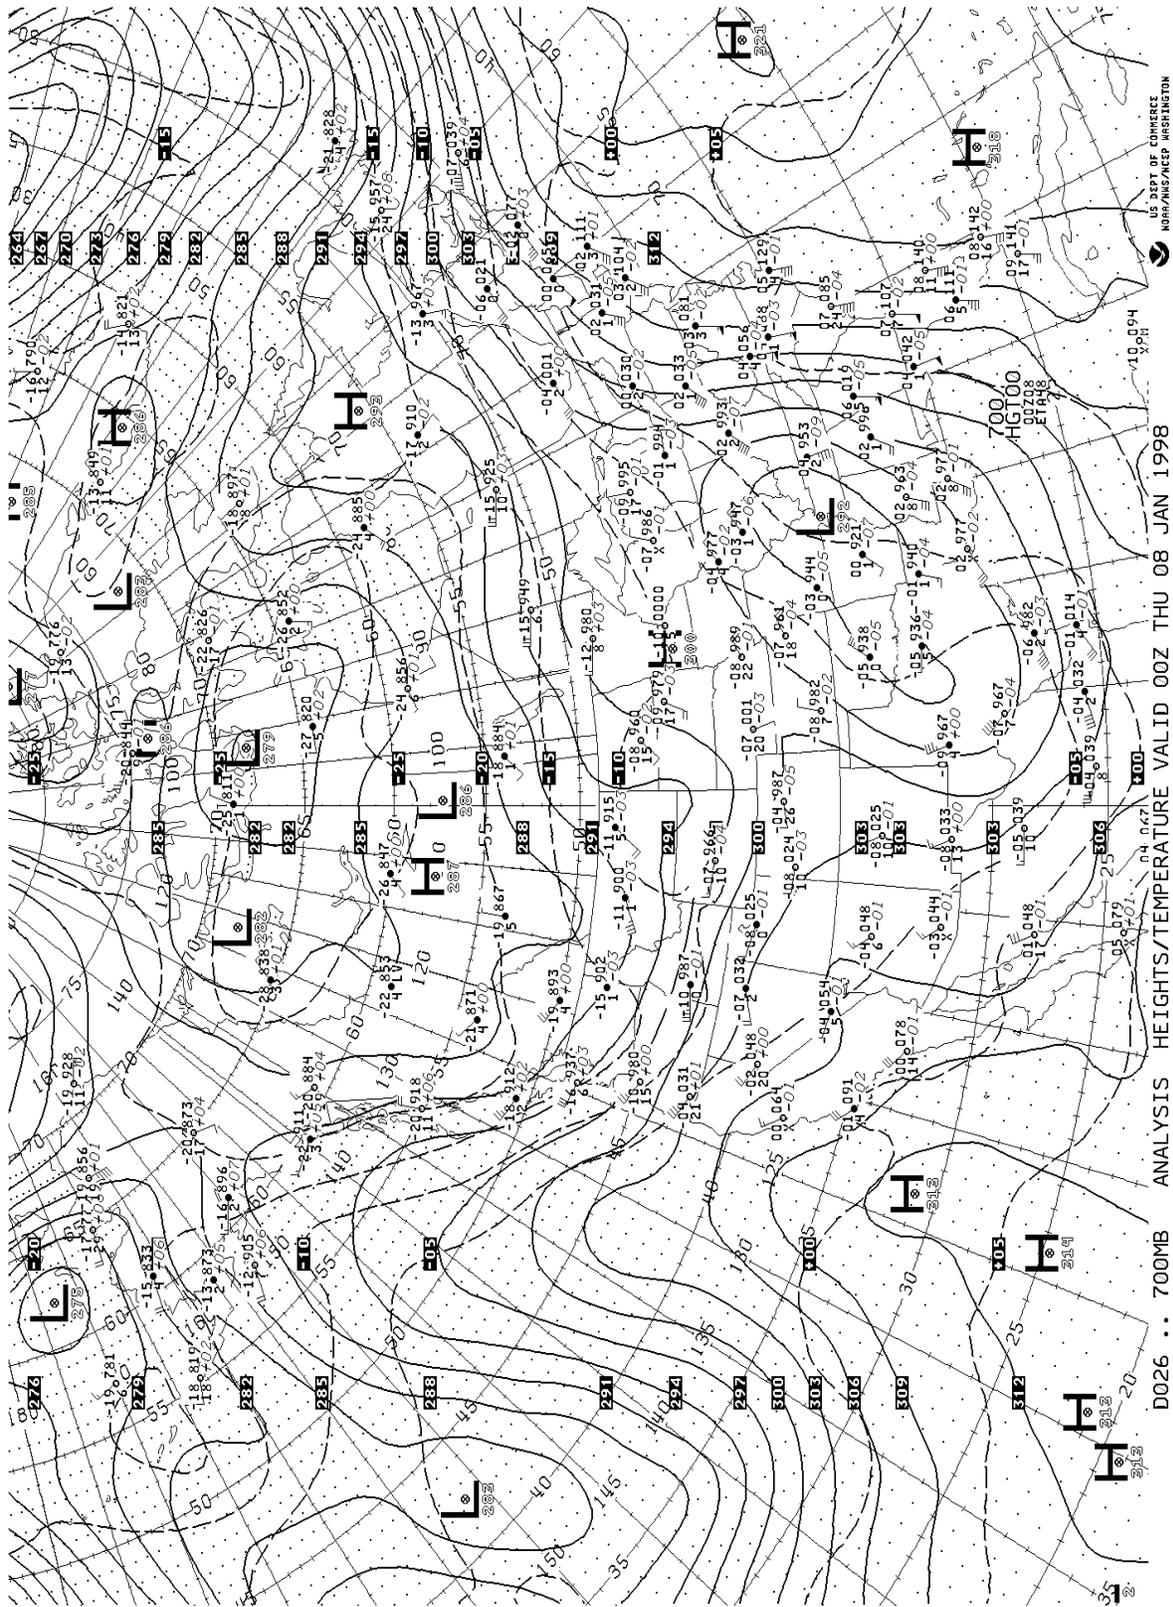


Figure 8-3. 700 Millibar/HectoPascal Analysis.

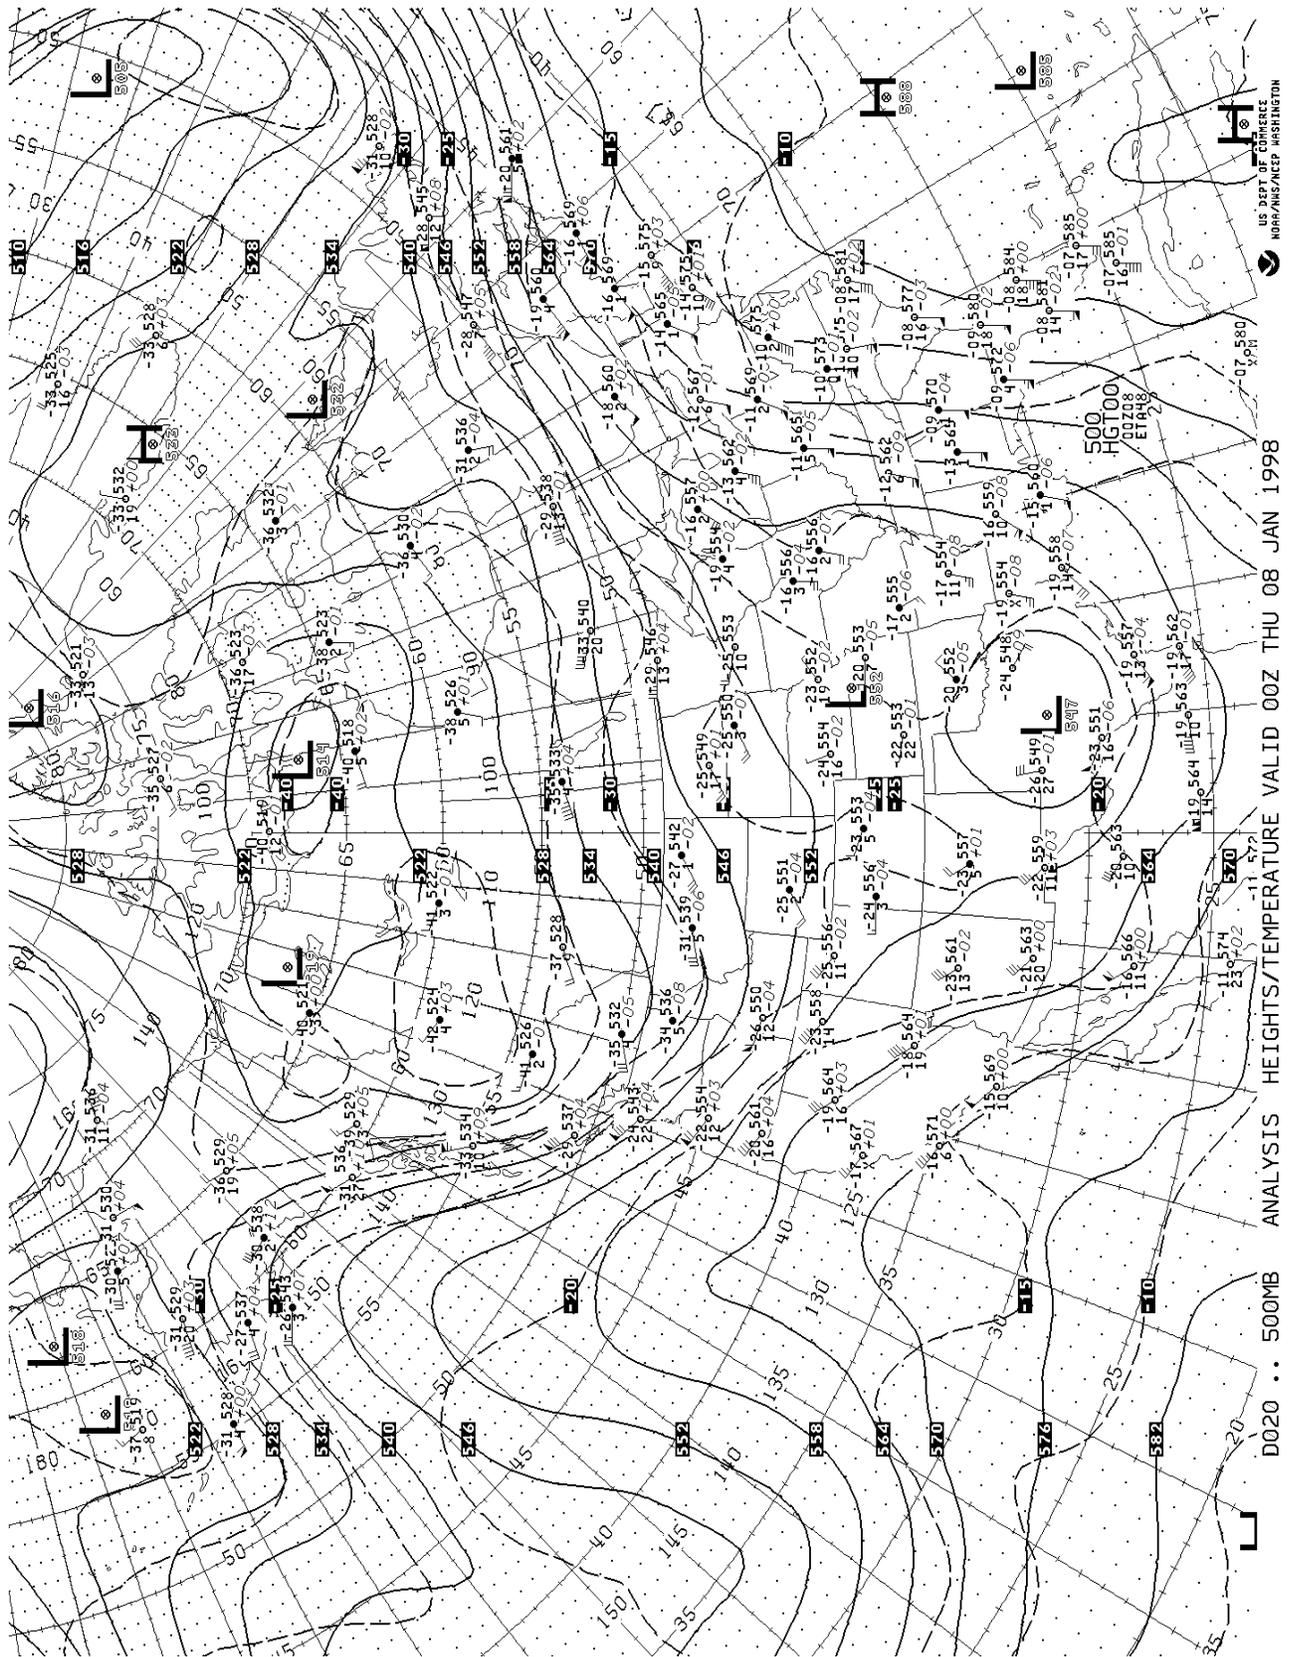


Figure 8-4. 500 Millibar/HectoPascal Analysis.

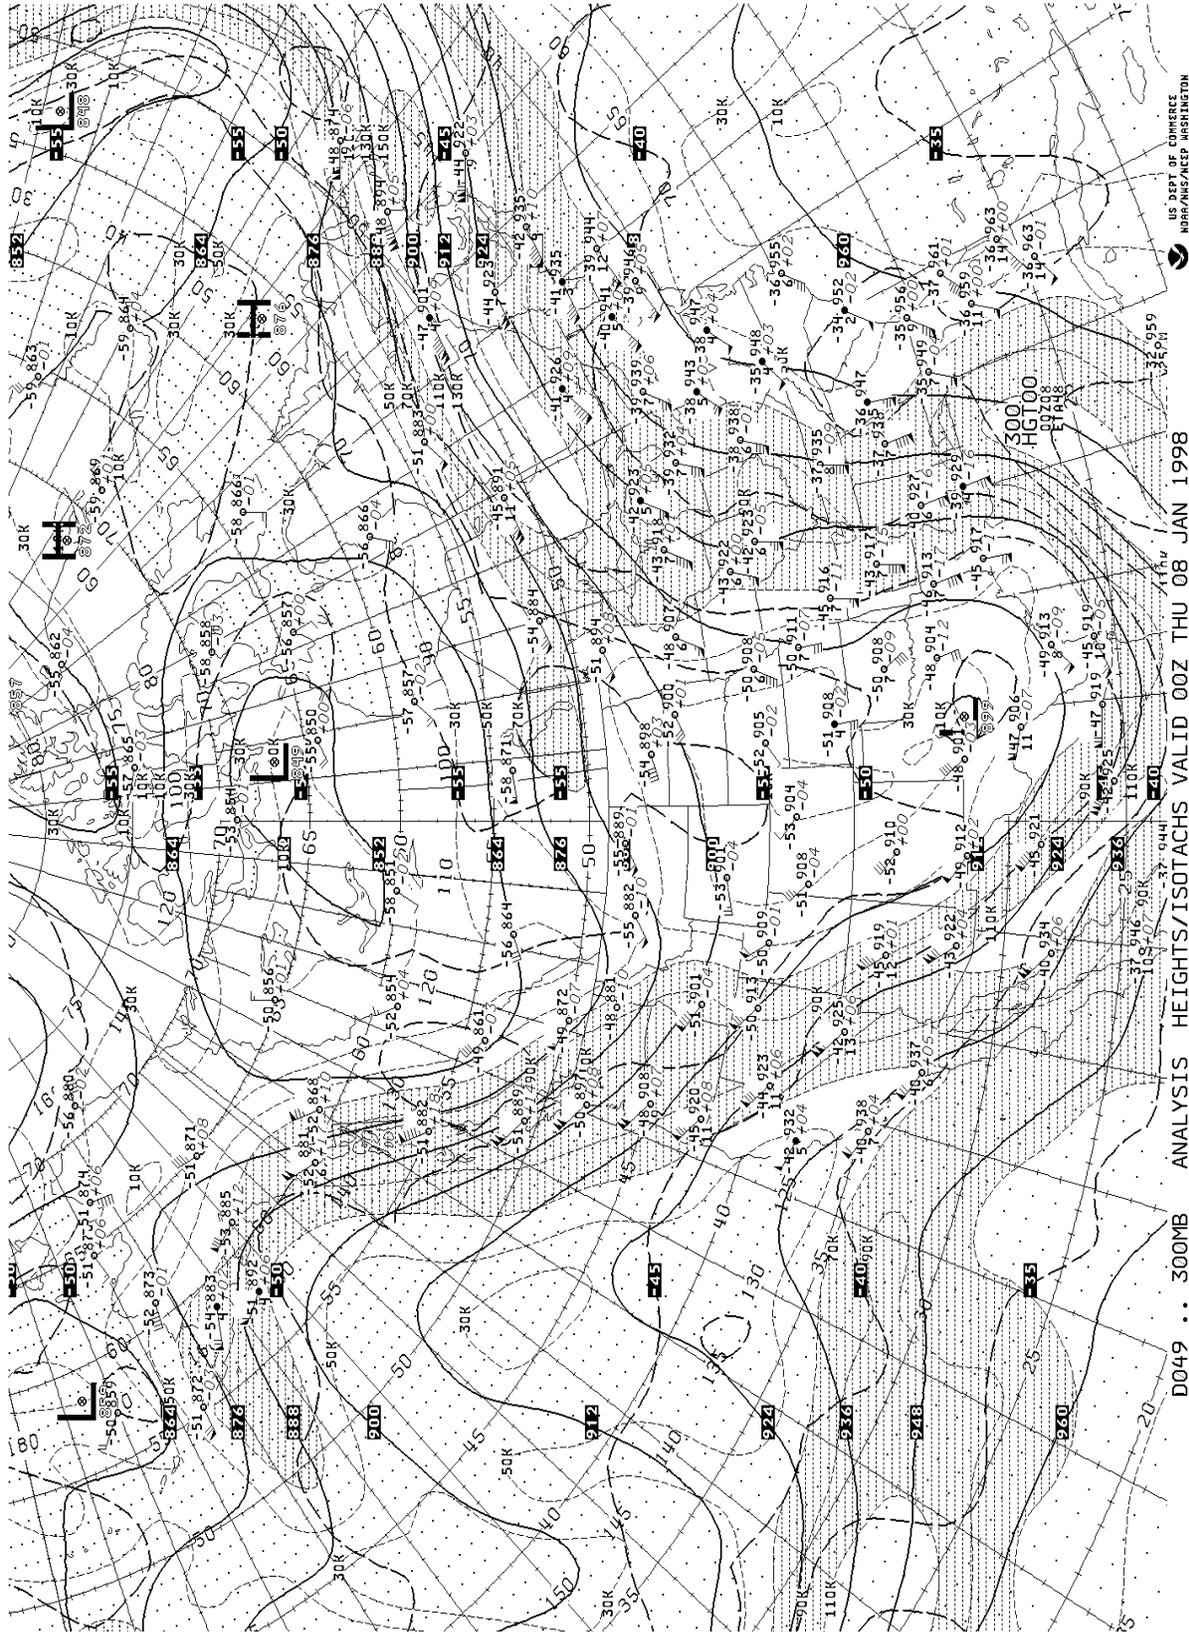


Figure 8-5. 300 Millibar/HectoPascal Analysis.



## Section 9 COMPOSITE MOISTURE STABILITY CHART

The composite moisture stability chart (Figure 9-1) is a chart composed of four panels which depict stability, precipitable water, freezing level, and average relative humidity conditions. This computer-generated chart contains information obtained from upper-air observation data and is available twice daily with valid times of 00Z and 12Z.

The availability of upper-air data for analysis (on all panels) is indicated by the shape of the station symbols. Use the legend on the precipitable water panel (Figure 9-3) for the explanation of symbols common to all four panels. Mandatory levels referred to in the legend are the routinely used levels of surface; 1,000; 925; 850; 700; and 500 mb (hPa). Significant levels are nonroutine levels at which significant changes occur in the vertical profile of atmospheric properties during each observation.

### STABILITY PANEL

The stability panel (Figure 9-2) is the upper left panel of the composite moisture stability chart. This panel contains two indexes that characterize the moisture and stability of the air. These indexes are the K index (KI) and the lifted index (LI).

### **K INDEX (KI)**

The K index (KI) provides moisture and stability information. KI values range from high positive values to low negative values. A high positive KI implies moist and unstable air. A low or negative KI implies dry and stable air. KIs are considered high when values are at and above +20 and low when values are less than +20.

The KI is calculated by the summation of three terms:

$$\begin{aligned} \text{KI} = & (850 \text{ mb/hPa temp} - 500 \text{ mb/hPa temp}) \\ & + (850 \text{ Mb/hPa dew point}) \\ & - (700 \text{ mb/hPa temp/dew point spread}) \end{aligned}$$

The first term (850 mb/hPa temp - 500 mb/hPa temp) describes the vertical temperature profile. The term compares the temperature at about 5,000 feet mean sea level (MSL) with the temperature at about 18,000 feet MSL. The larger the temperature difference, the less stable the air, and the higher the KI. The smaller the temperature difference, the more stable the air, and the lower the KI.

The second term, 850 mb (hPa) dew point, is a measure of the quantity of low-level moisture. The higher the dew point, the higher the moisture, and the higher the KI. The lower the dew point, the lower the moisture, and the lower the KI.

The third term, 700 mb (hPa) temp/dew point spread, is a measure of the level of saturation at 700 mb (hPa). The smaller the spread, the higher the level of saturation, and the higher the KI. The greater the spread, the lower the level of saturation (drier air), and the lower the KI.

The KI can change significantly over a short time period of time due to temperature and moisture changes.

## **LIFTED INDEX (LI)**

The lifted index (LI) is a common measure of atmospheric stability. The LI is obtained by hypothetically displacing a surface parcel upward to 500 mb (hPa) (about 18,000 feet MSL) and evaluating its stability at that level. A surface parcel is a small sample of air with representative surface temperature and moisture conditions. As the parcel is "lifted" it cools due to expansion. The temperature the parcel would have at 500 mb (hPa) is then subtracted from the actual (observed) 500 mb (hPa) temperature. This difference is the LI. LI values can be positive, negative, or zero. The LI does not identify the parcel's stability behavior at any of the intermediate altitudes between the surface and 500 mb (hPa).

A positive LI means a lifted surface parcel of air is stable. With a positive LI, the parcel would be colder and more dense than the surrounding air at 500 mb (hPa). A more dense parcel would resist upward motion. The stable surface parcel is like a rock at the bottom of a pool which, being more dense than the water, would resist being displaced upward. The more positive the LI, the more stable the air. Large positive values (+8 or greater) would indicate very stable air.

A negative LI means a lifted surface parcel of air is unstable. With a negative LI, the parcel would be warmer and less dense than the surrounding air at 500 mb (hPa). A parcel which is less dense than the surrounding air would continue to rise and possibly gain increasing upward speed until stabilizing at some higher altitude. The unstable surface parcel is like a cork at the bottom of a pool which, being less dense than the water, would accelerate upward to the surface of the pool. Large negative values (-6 or less) would indicate very unstable air.

A zero LI means a lifted surface parcel of air is neutrally stable. With a zero LI, the lifted parcel would have the same temperature and density as the air at 500 mb (hPa) and have a tendency to neither rise or sink. A neutrally stable parcel offers no resistance to vertical motion and, without further influence, would remain at the displaced level.

Temperature and moisture changes in the atmosphere change lifted index values. LIs decrease (become less stable) by increasing the surface temperatures, increasing surface dew points (moisture), and/or decreasing 500 mb (hPa) temperatures. Cold lows and troughs aloft with warm humid surface conditions tend to be associated with unstable air. LIs increase (become more stable) by decreasing surface temperatures, decreasing surface dew points, and/or increasing 500 mb (hPa) temperatures. Warm highs and ridges aloft with cool, dry surface conditions tend to be associated with stable air. Note that the LI can change considerably just by daytime heating and nighttime cooling of surface air. Daytime heating will decrease the LI, and nighttime cooling will increase the LI.

## **PLOTTED DATA**

Figure 9-2 shows the two stability indexes that are computed for each upper-air station. The LI is plotted above the station symbol, and the KI is plotted below the symbol. Station circles are blackened for LI values of zero or less. An "M" indicates the value is missing

## **STABILITY ANALYSIS**

The analysis is based on the LI only and highlights weakly stable and unstable areas. Solid lines are drawn for values of +4 and less at intervals of 4 (+4, 0, -4, -8, etc.).

## USING THE PANEL

The KI and LI can be used in combination to assess moisture and stability properties of air masses. Air masses can be classified as moist and stable, moist and unstable, dry and stable, and dry and unstable. When used in combination, the KI, although containing stability information, is used primarily to classify moisture information, and the LI primarily to classify stability information. See Figure 9-2. Aberdeen, SD, has air characterized as dry and stable. The KI is 3 (dry) and the LI is 19 (stable). Melbourne, FL, is an example of dry and unstable air. The KI is 8 (dry) and the LI is -1 (unstable). Moist and unstable air is depicted at Key West, FL. The KI is 29 (moist) and the LI is -3 (unstable). The last example, Albany, NY, indicates moist and stable air. The KI is 31 (moist) and the LI is 15 (stable).

Moisture and stability properties of air masses characterize the weather. High KIs are associated with the potential for clouds and precipitation. Weather associated with high LIs and stable air are stratiform clouds and steady precipitation. Weather associated with low and negative LIs are unstable air, convective clouds, and showery precipitation.

The KI and LI can also be used to evaluate thunderstorm information. The KI is an indicator of the probability of thunderstorms (Table 9-1). Higher KIs imply higher probabilities. Lower KIs imply lower probabilities. The low and negative LIs are indicators of intensities of thunderstorms, if they occur. Higher negative LIs imply greater instability and stronger updrafts in thunderstorms. High positive LIs suggest little, if any, chance of thunderstorms.

Air masses classified with negative LIs do not always contain thunderstorms. This can occur for several reasons. Thunderstorm development is inhibited when a layer of stable air is located between the surface and 500 mb (hPa). This stable layer is referred to as a "cap." Inadequate amounts of moisture may also limit thunderstorm development in the presence of negative LIs. It is also possible to have a positive LI and still have thunderstorms develop. This can happen when a layer of air aloft located above stable surface air, such as above a front, is unstable and is sufficiently lifted, or if temperature and moisture conditions change rapidly and stabilities decrease.

Seasons affect the use of the KI regarding thunderstorm information. During the warmer seasons of spring, summer, and fall, a high KI generally indicates conditions are favorable for thunderstorms (Table 9-1). During winter with cold temperatures, fairly high values do not necessarily mean conditions are favorable for thunderstorms. Cold 850 mb (hPa) temperatures mean low dew points (low moisture.) The temperature profile term can generate high KI values, but low dew points may mean inadequate moisture to support thunderstorm development.

**Table 9-1 Thunderstorm Potential**

<b>Lifted Index (LI)</b>	<b>Severe Potential</b>	<b>K Index (KI)</b>	<b>Thunderstorm Probability</b>
<b>0 to -2</b>	<b>Weak</b>	<b>&lt; 15</b>	<b>near 0%</b>
		<b>15 - 19</b>	<b>20%</b>
<b>-2 to -6</b>	<b>Moderate</b>	<b>20 - 25</b>	<b>21% - 40%</b>
		<b>26 - 30</b>	<b>41% - 60%</b>
<b>≤ -6</b>	<b>Strong</b>	<b>31 - 35</b>	<b>61% - 80%</b>
		<b>36 - 40</b>	<b>81% - 90%</b>
		<b>&gt; 40</b>	<b>near 100%</b>

**PRECIPITABLE WATER PANEL**

The precipitable water panel (Figure 9-3) is the upper right panel of the composite moisture stability chart. This panel is an analysis of the quantity of water vapor in the atmosphere from the surface to the 500 mb (hPa) level (18,000 feet MSL). The quantity of water vapor is shown as precipitable water, which is the amount of liquid water that would result if all the water vapor were condensed.

Two constant factors affect precipitable water reports. Warm air is capable of holding higher quantities of water vapor than cold air. Therefore, warm air masses generally have more precipitable water than cold air masses. For example, precipitable water values are higher during summer months than during winter months. Also, high elevation stations have smaller vertical columns of air between surface and 500 mb (hPa) than low elevation stations. Therefore, higher elevation stations tend to have lower precipitable water than lower stations.

## **PLOTTED DATA**

Precipitable water values are plotted above each station symbol to the nearest hundredth of an inch. The percent relative to normal for the month is plotted below the station symbol. Blackened circles indicate stations with precipitable water values of 1.00 inch or more. An “M” plotted above the station symbol indicates missing data.

## **ANALYSIS**

Isopleths (lines of equal values) of precipitable water are drawn and labeled for every 0.25 inches with heavier isopleths drawn at 0.50-inch intervals.

## **USING THE CHART**

This panel is used to determine the quantity of water vapor in the air between the surface and 500 mb (hPa) (18,000 feet MSL). Higher moisture content indicates “more fuel” for convective conditions. In Figure 9-3, Glasgow, MT, has a plot of “.22/100.” This indicates that 22 hundredths of an inch of precipitable water is present, which is the average for the month. At Oklahoma City, OK, the “.72/196” indicates that 72 hundredths of an inch of precipitable water is present, which is 196 percent of normal (about double) for any day during this month. At Aberdeen, SD, the percent of normal value is not plotted due to insufficient climatological data.

## **FREEZING LEVEL PANEL**


The freezing level panel (Figure 9-4) is the lower left panel of the composite moisture stability chart. This panel is an analysis of observed freezing levels. The freezing level is the height above MSL at which the temperature is zero degrees Celsius.

Freezing levels are affected by air mass temperatures. Colder air masses have lower freezing levels, and warmer air masses have higher freezing levels. Freezing levels change with the movement of contrasting cold and warm air masses. For example, freezing levels tend to lower behind cold fronts and rise ahead of warm fronts.

Generally, a station has one freezing level. Relative to the freezing level, the lower levels have above-freezing temperatures, and the upper levels have below-freezing temperatures. During very cold periods, all temperatures over a station may be below freezing and there would be no freezing level.

During colder periods of the year, and with certain weather systems such as fronts, stations may have more than one freezing level. There would be several layers of air with alternating above-freezing and below-freezing temperatures. A report from such a station would contain multiple freezing levels. Table 9-2 illustrates a vertical temperature profile drawn relative to zero degrees Celsius which contains multiple freezing levels. In this table there are two layers with above-freezing temperatures and two layers with below-freezing temperatures. Above-freezing layers extend from the surface to 3,000 feet MSL and from 6,000 to 9,000 feet MSL. Below-freezing layers extend from 3,000 to 6,000 feet MSL and above 9,000 feet MSL.

**Table 9-2 Vertical Temperature Profile with Freezing Levels**

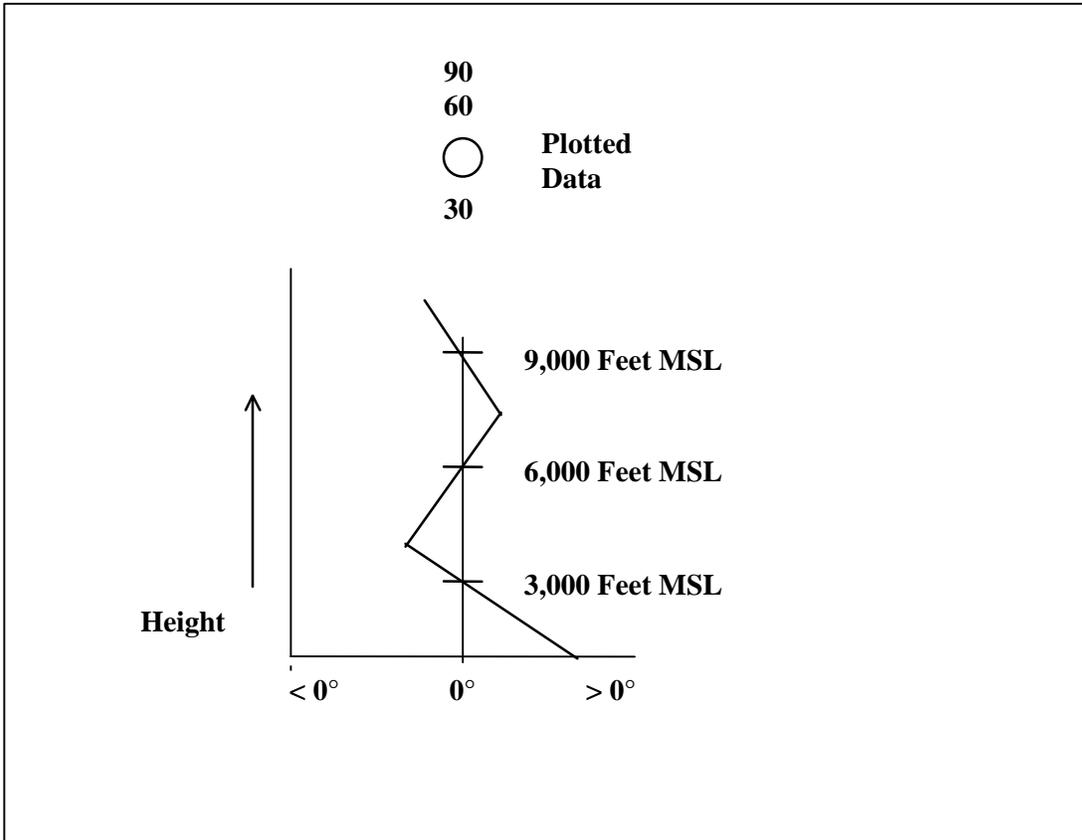

## **PLOTTED DATA**

Observed freezing levels are plotted on the chart in hundreds of feet MSL. Multiple freezing level events have plots for each freezing level. BF is plotted on the chart to indicate below-freezing temperatures at the surface. "M" indicates missing data. Note in Table 9-2 the freezing level plots associated with the illustrated vertical temperature profile. Table 9-3 provides examples of several station plots for various types of freezing level conditions.

## **ANALYSIS**

Freezing levels are analyzed with contours (lines of constant height) and are drawn as solid lines. The lines are drawn with intervals of 4,000 feet beginning with 4,000 feet. Multiple freezing levels are analyzed for the lowest freezing level. Contours are labeled in hundreds of feet MSL. The surface freezing level is drawn and labeled as the 32-degree Fahrenheit (0° C) isotherm. The surface freezing level line encloses stations with BF data plots.

## **USING THE PANEL**

The freezing level chart is used to assess freezing level heights and their values relative to flight profiles. In Figure 9-4, Salt Lake City, UT, is an example where all temperatures above the station were below freezing (below 0° C or 32° F.) Lake Charles, LA, depicts a single freezing level at 11,500 feet MSL. North Platte, NE, is an example of multiple freezing levels. The temperatures were below freezing at the surface but warmed to above freezing between 4,400 and 6,100 feet MSL. Above 6,100 feet MSL the temperatures were again below freezing.

In areas with single freezing levels, flights above the freezing level will be in below-freezing temperatures, and flights below the freezing level will be in above-freezing temperatures. In areas with multiple freezing levels, there are multiple layers of above- and below-freezing temperatures. According to Figure 9-4, a flight en route from Seattle, WA, to Portland, OR, at 7,000 feet would be flying above the freezing level and in below-freezing temperatures. A flight en route at 7,000 feet from Atlanta, GA, to Washington, DC, would be flying below the freezing level and in above-freezing temperatures.

Special care must be exercised to properly identify the altitudes of layers with above and below freezing temperatures when there is a potential for icing conditions.

**Table 9-3 Plotting Freezing Levels**

Plotted	Interpretation
<p style="text-align: center;">○ BF</p>	<p>Entire observation is below freezing (0 degrees Celsius).</p>
<p style="text-align: center;">28 ✕</p>	<p>Freezing level is at 2,800 feet MSL; temperatures below freezing above 2,800 feet MSL. All significant levels are missing.</p>
<p style="text-align: center;">120 □</p>	<p>Freezing level at 12,000 feet; temperatures above 12,000 feet are below freezing. Some mandatory levels are missing.</p>
<p style="text-align: center;">110 51 ○ BF</p>	<p>Temperatures are below freezing from the surface to 5,100 feet; above freezing from 5,100 to 11,000 feet MSL; and below freezing above 11,000 feet MSL.</p>
<p style="text-align: center;">90 34 ○ 3</p>	<p>Lowest freezing level is at 300 feet; below freezing from 300 feet to 3,400 feet; above freezing from 3,400 to 9,000 feet; and below freezing above 9,000 feet.</p>
<p style="text-align: center;">M ○</p>	<p>Data is missing.</p>

## **AVERAGE RELATIVE HUMIDITY PANEL**

The average relative humidity panel (Figure 9-5) is the lower right panel of the composite moisture stability chart. This panel is an analysis of the average relative humidity for the layer surface to 500 mb (hPa).

Relative humidity is the ratio of the quantity of water vapor in a sample of air compared to the air's capacity to hold water vapor expressed in percent. The air's capacity to hold water vapor depends primarily on its temperature and, to a lesser extent, its pressure. Warm air can hold more water vapor than cold air. Air at lower pressure can hold more water vapor than air at higher pressure.

Average relative humidities of the layer are changed primarily by vertical motion of air. Upward motion increases relative humidities, and downward motion decreases relative humidities.

Relative humidity is an indicator of the degree to which air is saturated. Air is saturated when it contains all of the water vapor it can hold. High relative humidities (moist air) identify air which is at or close to saturation. Air with high relative humidities often contain clouds and may produce precipitation. Low relative humidities (dry air) identify air that is not close to saturation. Low relative humidity air tends to be free of clouds.

## **PLOTTED DATA**

The average relative humidity is plotted above each station symbol. Blackened circles indicate stations with humidities of 50 percent and higher. An "M" indicates the value is missing.

## **ANALYSIS**

Isopleths of relative humidity, called isohumes, are drawn and labeled every 10 percent, with more heavily shaded isohumes drawn for values of 10, 50, and 90 percent.

## **USING THE PANEL**


This panel is used to determine the average relative humidity of air from the surface to 500 mb (hPa). Areas with high average relative humidities have a higher probability of thick clouds and possibly precipitation. Areas with low average relative humidities have a lower probability of thick clouds, although shallow cloud layers may be present. Weather-producing systems, such as lows and fronts, which are moving into areas with high average relative humidities have a high probability of developing clouds and precipitation. Significant values of average relative humidities which support the possibility of developing clouds and precipitation are 50% and higher with unstable air, and 70% and higher for stable air. Weather-producing systems affecting areas with low average relative humidities, 30% and less, may produce only a few clouds, if any. According to Figure 9-5, much of Arkansas has very moist air with average relative humidities greater than 90%, while western Arizona has dry air with average relative humidities less than 30%.

High values of relative humidity do not necessarily mean high values of water vapor content (precipitable water). For example in Figure 9-3, Oakland, CA, had less water vapor content than Miami, FL (.64 and 1.43 respectively). However, in Figure 9-5, the average relative humidities are the same for both stations. If rain were falling at both stations, the result would likely be lighter precipitation totals for Oakland.


### **USING THE CHART**

This chart is used to identify the distribution of moisture, stability, and freezing level properties of the atmosphere. These properties and their association with weather systems provide important insights into existing and forecast weather conditions as well as possible aviation weather hazards.


Generally these properties tend to move with the associated weather systems, such as lows, highs, and fronts. Contrasting property values within weather systems are redistributed relative to the systems by advecting winds. Also, changes in property values relative to the systems can occur as a result of development and dissipation processes. In some instances property values will remain stationary relative to geographical features, such as mountains and coastal regions.

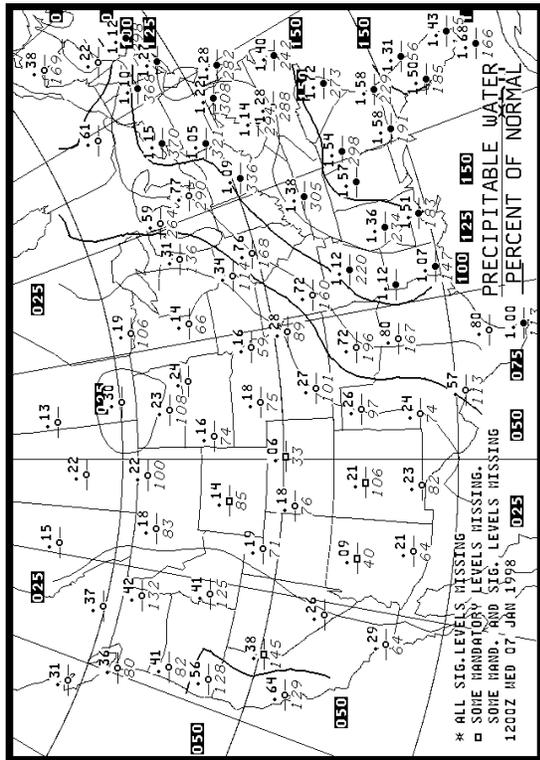


PRECIPITABLE WATER ANALYSIS 12Z MED 07 JAN 1998

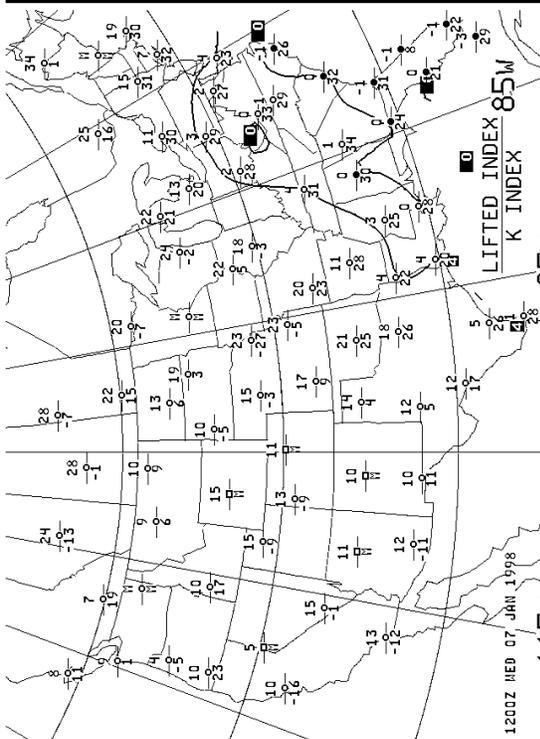

LIFTED INDEX ANALYSIS 12Z MED 07 JAN 1998

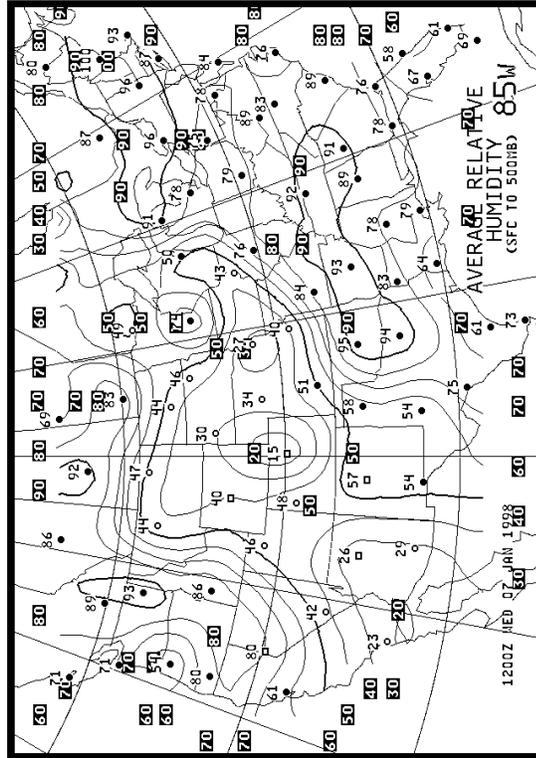

AVERAGE RELATIVE HUMIDITY 85W (SFC TO 500MB) ANALYSIS 12Z MED 07 JAN 1998

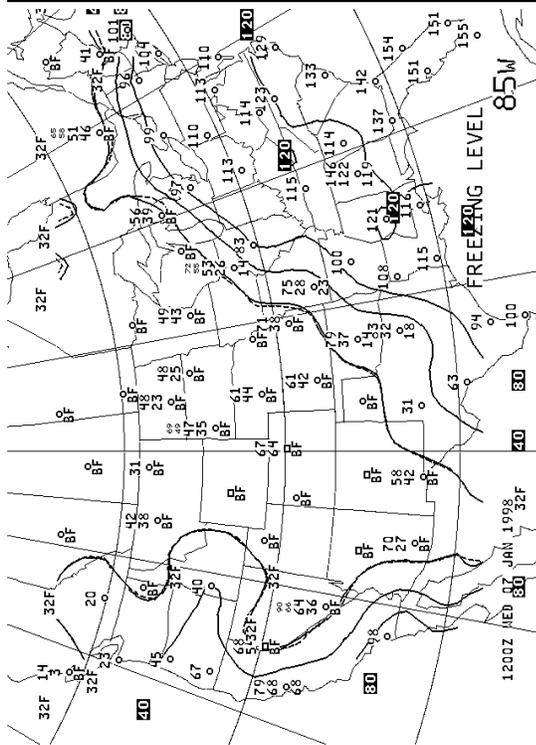

FREEZING LEVEL ANALYSIS 12Z MED 07 JAN 1998

Figure 9-1. Composite Moisture Stability Chart.

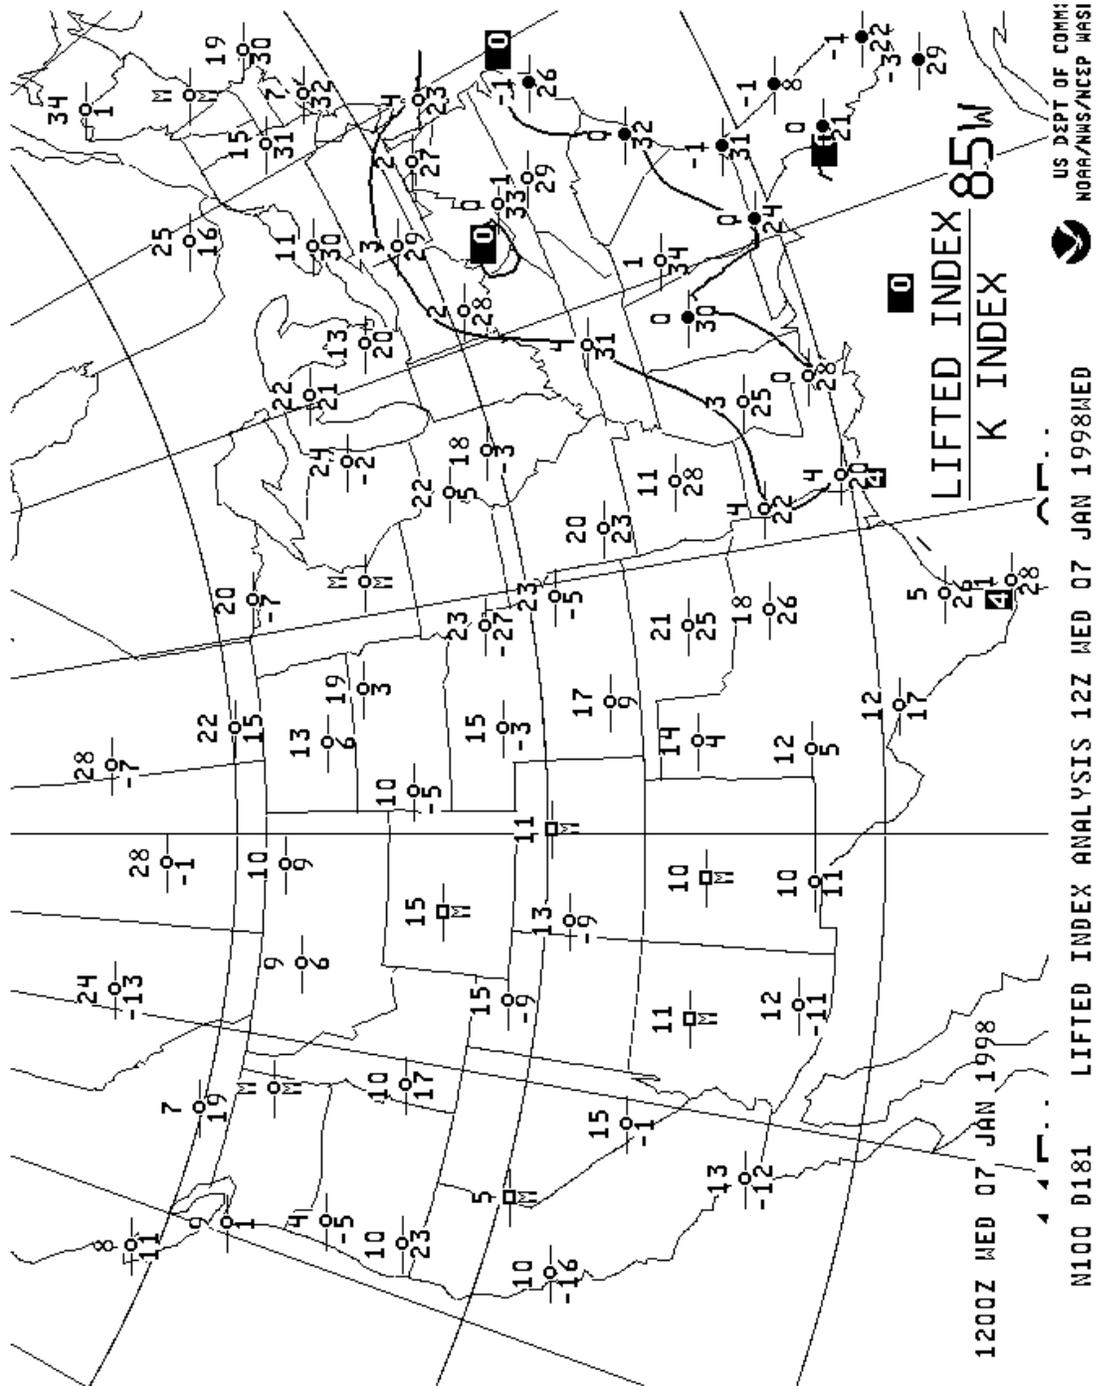


Figure 9-2. Stability Panel.

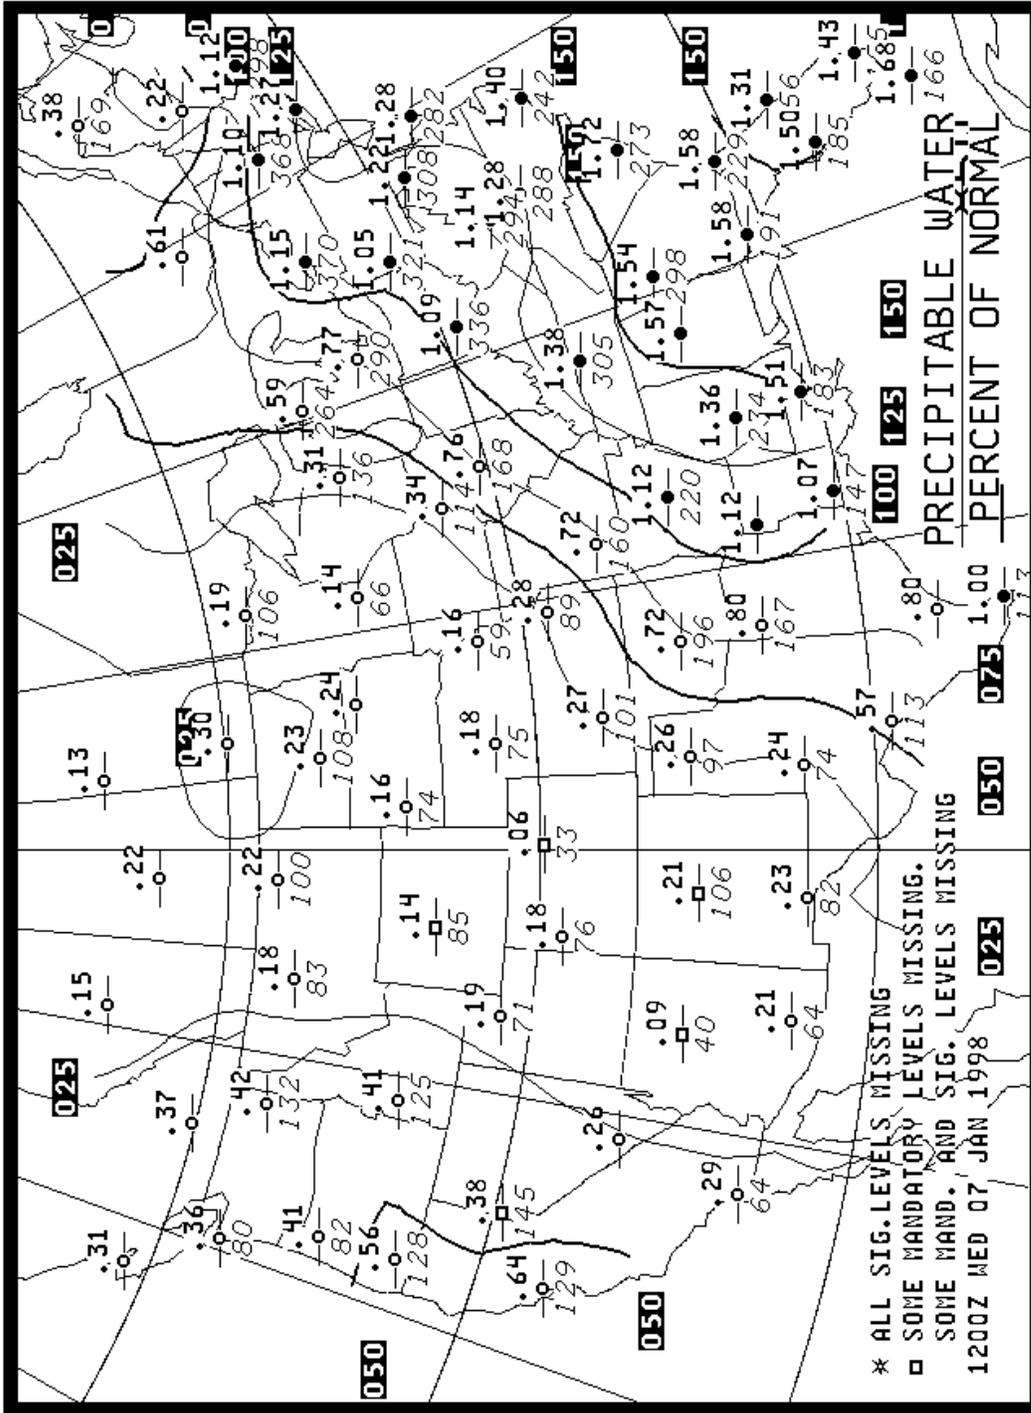


Figure 9-3. Precipitable Water Panel.





## Section 10 WINDS AND TEMPERATURES ALOFT CHARTS

Winds aloft charts, both forecast and observed, are computer-generated products. The forecast winds aloft charts also contain forecast temperatures aloft.

### **FORECAST WINDS AND TEMPERATURES ALOFT (FD)**

Forecast winds and temperatures aloft (FD) charts are prepared for eight levels on eight separate panels. The levels are 6,000; 9,000; 12,000; 18,000; 24,000; 30,000; 34,000, and 39,000 feet MSL. They are available daily, and the 12-hour progs are valid at 1200Z and 0000Z. A legend on each panel shows the valid time and the level of the panel. Levels below 18,000 feet are in true altitude, and levels 18,000 feet and above are in pressure altitude. Figure 10-1 shows examples from a winds and temperatures aloft forecast chart. Figure 10-2 provides a closer view of the winds and temperature aloft forecast chart. Temperature is in whole degrees Celsius for each forecast point and is entered above and to the right of the station circle. Arrows with pennants and barbs, similar to those used on the surface map, show wind direction and speed. Wind direction is drawn to the nearest 10 degrees with the second digit of the coded direction entered at the outer end of the arrow. To determine wind direction, obtain the general direction from the arrow, and then use the digit to determine the direction to the nearest 10 degrees. For example, a wind in the northwest quadrant with a digit of "3" indicates 330 degrees. A calm or light and variable wind is shown by "99" entered to the lower left of the station circle. See Table 10-1 for examples of plotted temperatures and winds with their interpretations.

Table 10-1 Plotted Winds and Temperatures

<i>Plotted</i>	<i>Interpretation</i>
	<p>12 degrees Celsius, wind 060 degrees at 5 knots</p>
	<p>3 degrees Celsius, wind 160 degrees at 25 knots</p>
	<p>0 degrees Celsius, wind 250 degrees at 15 knots</p>
	<p>-9 degrees Celsius, wind 260 degrees at 50 knots</p>
	<p>-47 degrees Celsius, wind 360 degrees at 115 knots</p>
	<p>-11 degrees Celsius, wind calm or light and variable</p>

## **OBSERVED WINDS ALOFT**

Charts of observed winds for selected levels are sent twice daily on a four-panel chart valid at 1200Z and 0000Z. The chart depicts winds and temperatures at the second standard level, 14,000, 24,000, and 34,000 feet. Figure 10-3 is an example of this chart, and Figure 10-4 is an example of one of the panels. Wind direction and speed are shown by arrows, the same as on the forecast charts. A calm or light and variable wind is shown as “LV” and a missing wind as “M,” both plotted to the lower right of the station circle. The station circle is filled in when the reported temperature/dew point spread is 5 degrees Celsius or less. Observed temperatures are included on the upper two panels of this chart (24,000 feet and 34,000 feet). A dotted bracket around the temperature means a calculated temperature.

The second standard level (Figure 10-3) for a reporting station is found between 1,000 and 2,000 feet above the surface, depending on the station elevation. The second standard level is used to determine low-level wind shear and frictional effects on lower atmosphere winds. To compute the second standard level, find the next thousand-foot level above the station elevation and add 1,000 feet to that level. For example, the next thousand-foot level above Oklahoma City, OK, (station elevation 1,290 feet MSL) is 2,000 feet MSL. The second standard level for Oklahoma City, OK, (2,000 feet + 1,000 feet) is 3,000 feet MSL or 1,710 feet AGL.

For example:

Station:

Amarillo, TX	Bismarck, ND	Topeka, KS	Key West, FL
--------------	--------------	------------	--------------

Station elevation:

3,604 MSL	1,677 MSL	879 MSL	0 MSL
-----------	-----------	---------	-------

Next thousand-foot level above station:

4,000 MSL	2,000 MSL	1,000 MSL	1,000 MSL
+1,000	+1,000	+1,000	+1,000
_____	_____	_____	_____

Second standard level:

5,000 MSL	3,000 MSL	2,000 MSL	2,000 MSL
or	or	or	or
1,396 AGL	1,323 AGL	1,121 AGL	2,000 AGL

Note that the 12,000 foot MSL panel is true altitude, while the 24,000 and 34,000 feet MSL panels are in pressure altitude. (See Figure 10-1.)

## **USING THE CHARTS**

The use of the winds aloft chart is to determine winds at a proposed flight altitude or to select the best altitude for a proposed flight. Temperatures also can be determined from the forecast charts. Interpolation must be used to determine winds and temperatures at a level between charts and data when the time period is other than the valid time of the chart.

December 1999

Forecast winds are generally preferable to observed winds since they are more relevant to flight time. Although observed winds are 5 to 8 hours old when received, they still can be a useful reference to check for gross errors on the 12-hour prog.

### **INTERNATIONAL FLIGHTS**

Computer-generated forecast charts of winds and temperatures aloft are available for international flights at specified levels. The U.S. National Centers of Environmental Prediction (NCEP), near Washington D.C., is a component of the World Area Forecast System (WAFS). NCEP is designated in the WAFS as both a World Area Forecast Center and a Regional Area Forecast Center (RAFC). Its main function as a World Area Forecast Center is to prepare global forecasts in grid-point form of upper winds and upper air temperatures and to supply the forecasts to associated RAFCs. One of NCEP's main RAFC functions is to prepare and supply to users charts of forecast winds, temperatures, and significant weather.

For example, Figures 10-5 and 10-6, are originated by NCEP. The flight level of Figure 10-5 is 34,000 feet MSL, and Figure 10-6 is 45,000 feet MSL. This, along with the valid time of the chart and the data base time (data from which the forecast was derived), makes up the legend along an edge of each chart.

Forecast winds are expressed in knots for spot locations with directions and speed depicted in the same manner as the U.S. forecast winds and temperatures aloft chart (Figure 10-1). Forecast temperatures are depicted for spot locations inside circles that are expressed in degrees Celsius. For charts with flight levels (FL) at or below FL180 (18,000 feet), temperatures are depicted as negative (-) or positive (+). On charts for FLs above FL180, temperatures are always negative and no sign is depicted.

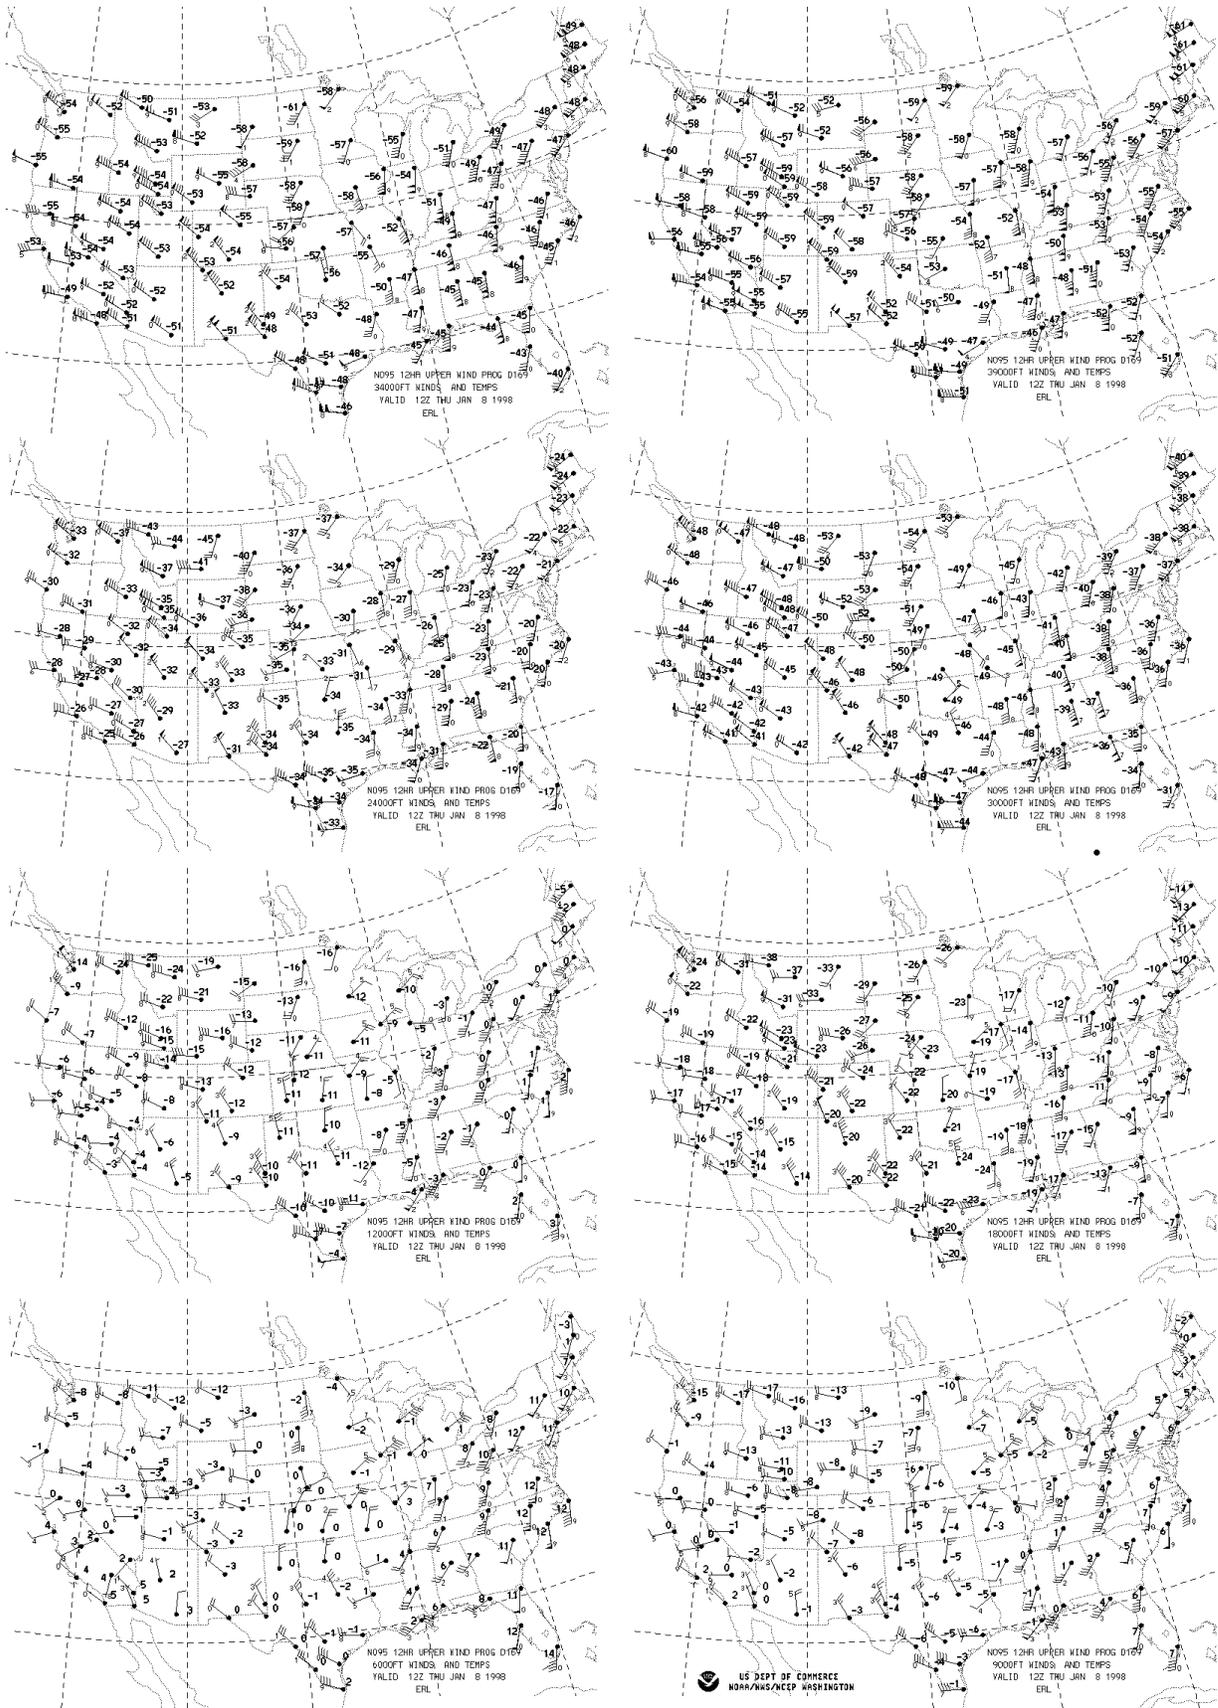


Figure 10-1. Forecast Winds and Temperatures Aloft Chart.

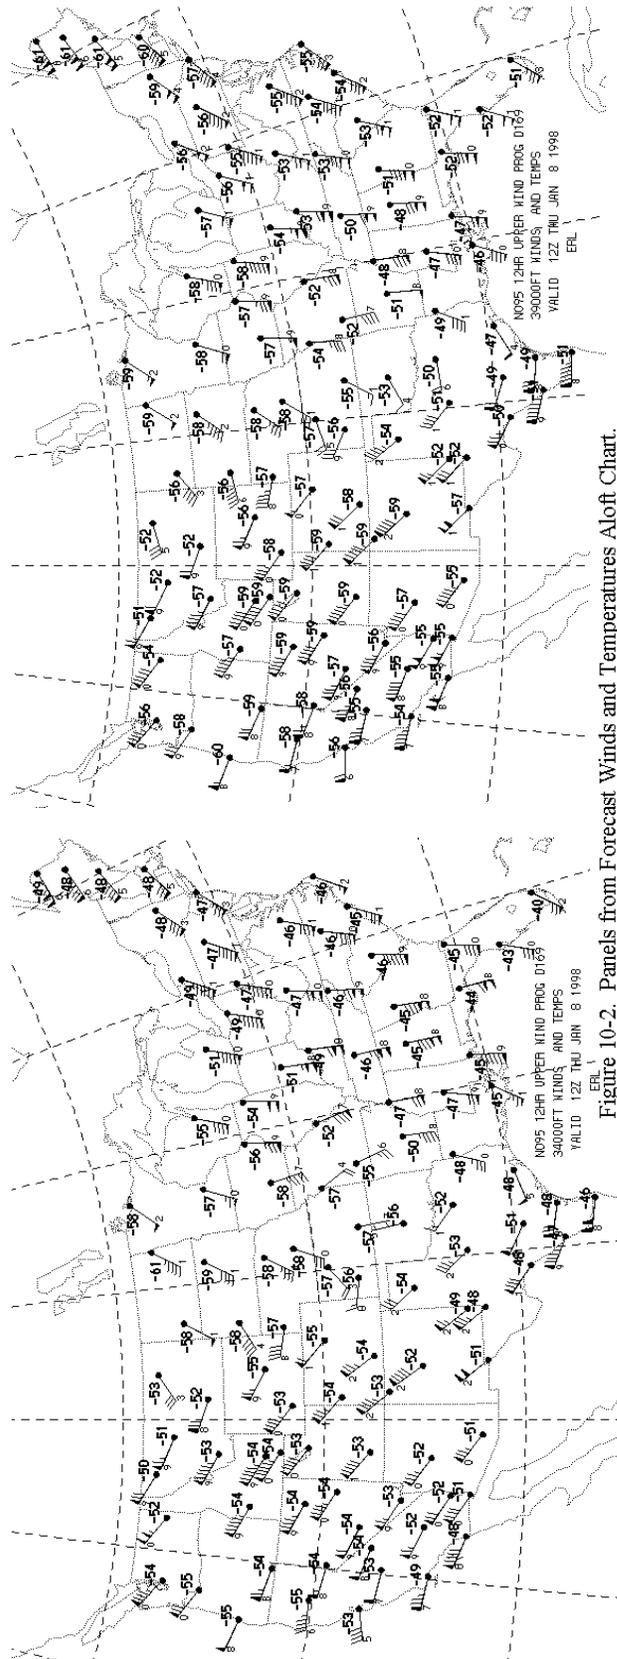


Figure 10-2. Panels from Forecast Winds and Temperatures Aloft Chart.

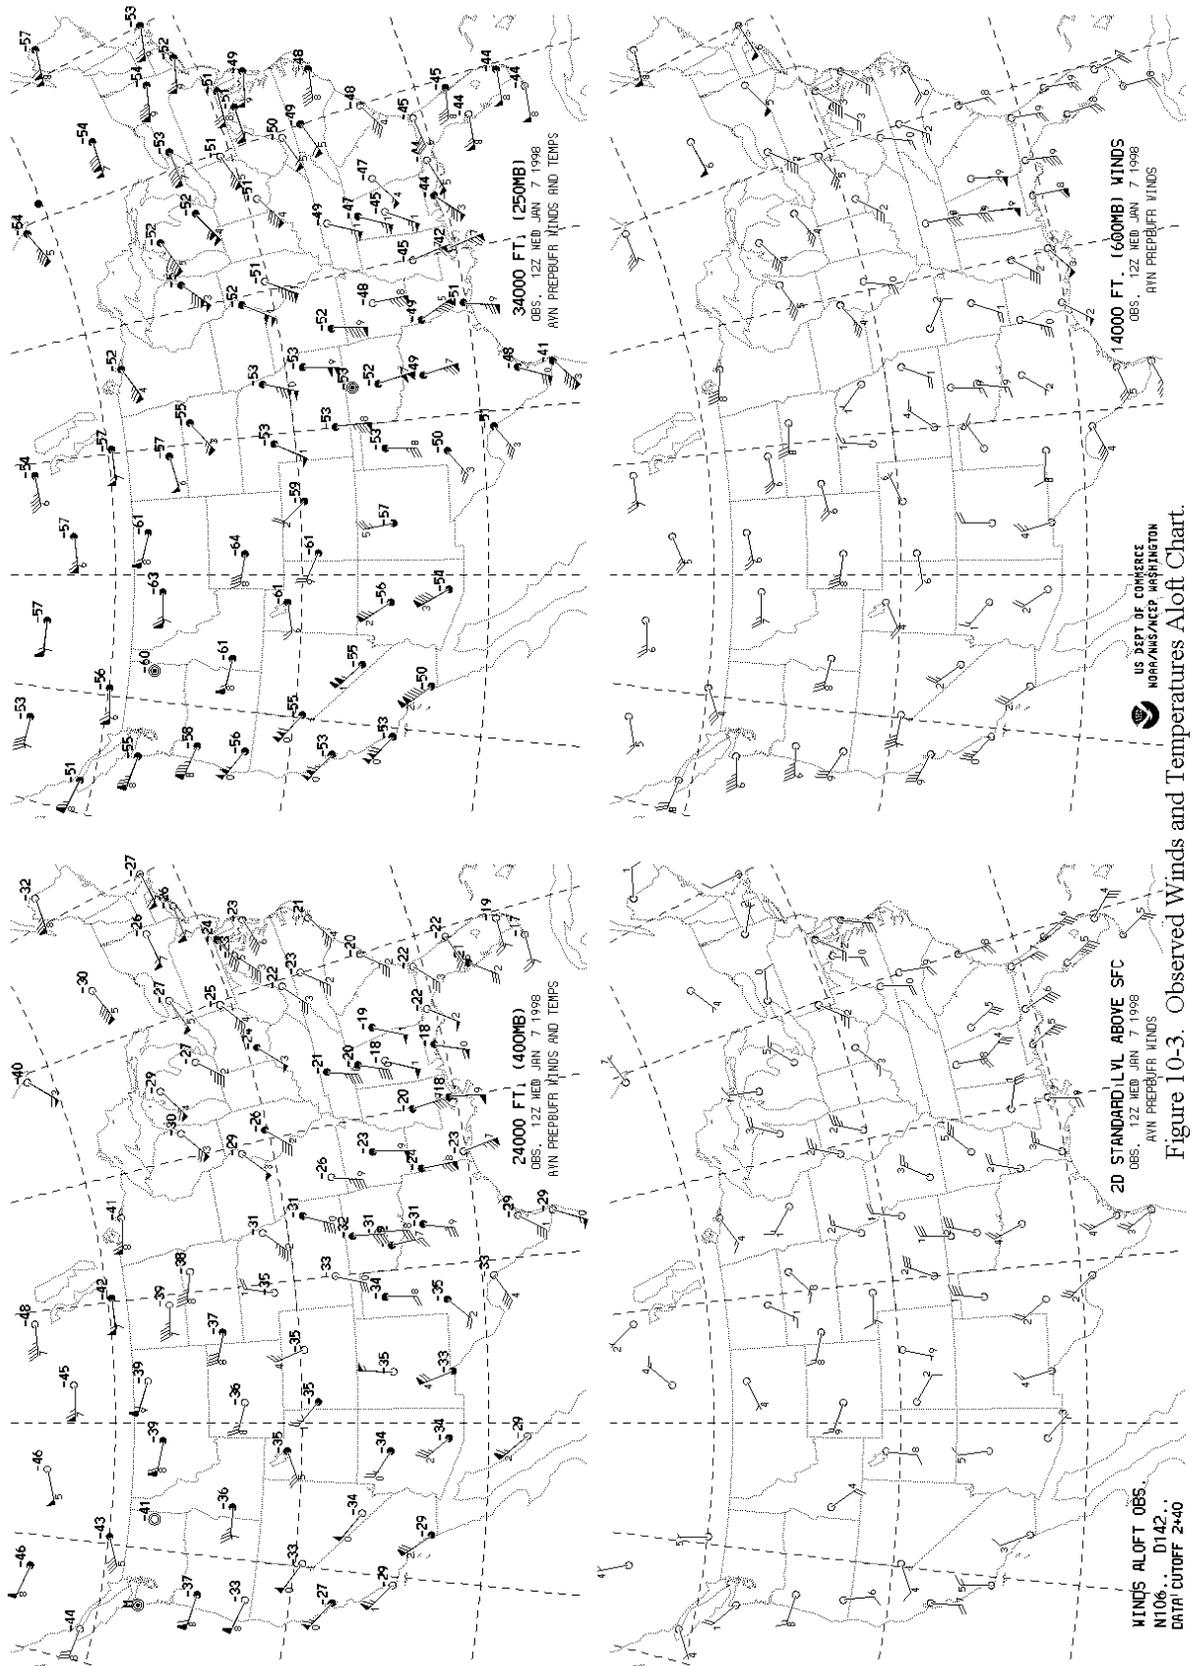


Figure 10-3. Observed Winds and Temperatures Aloft Chart.

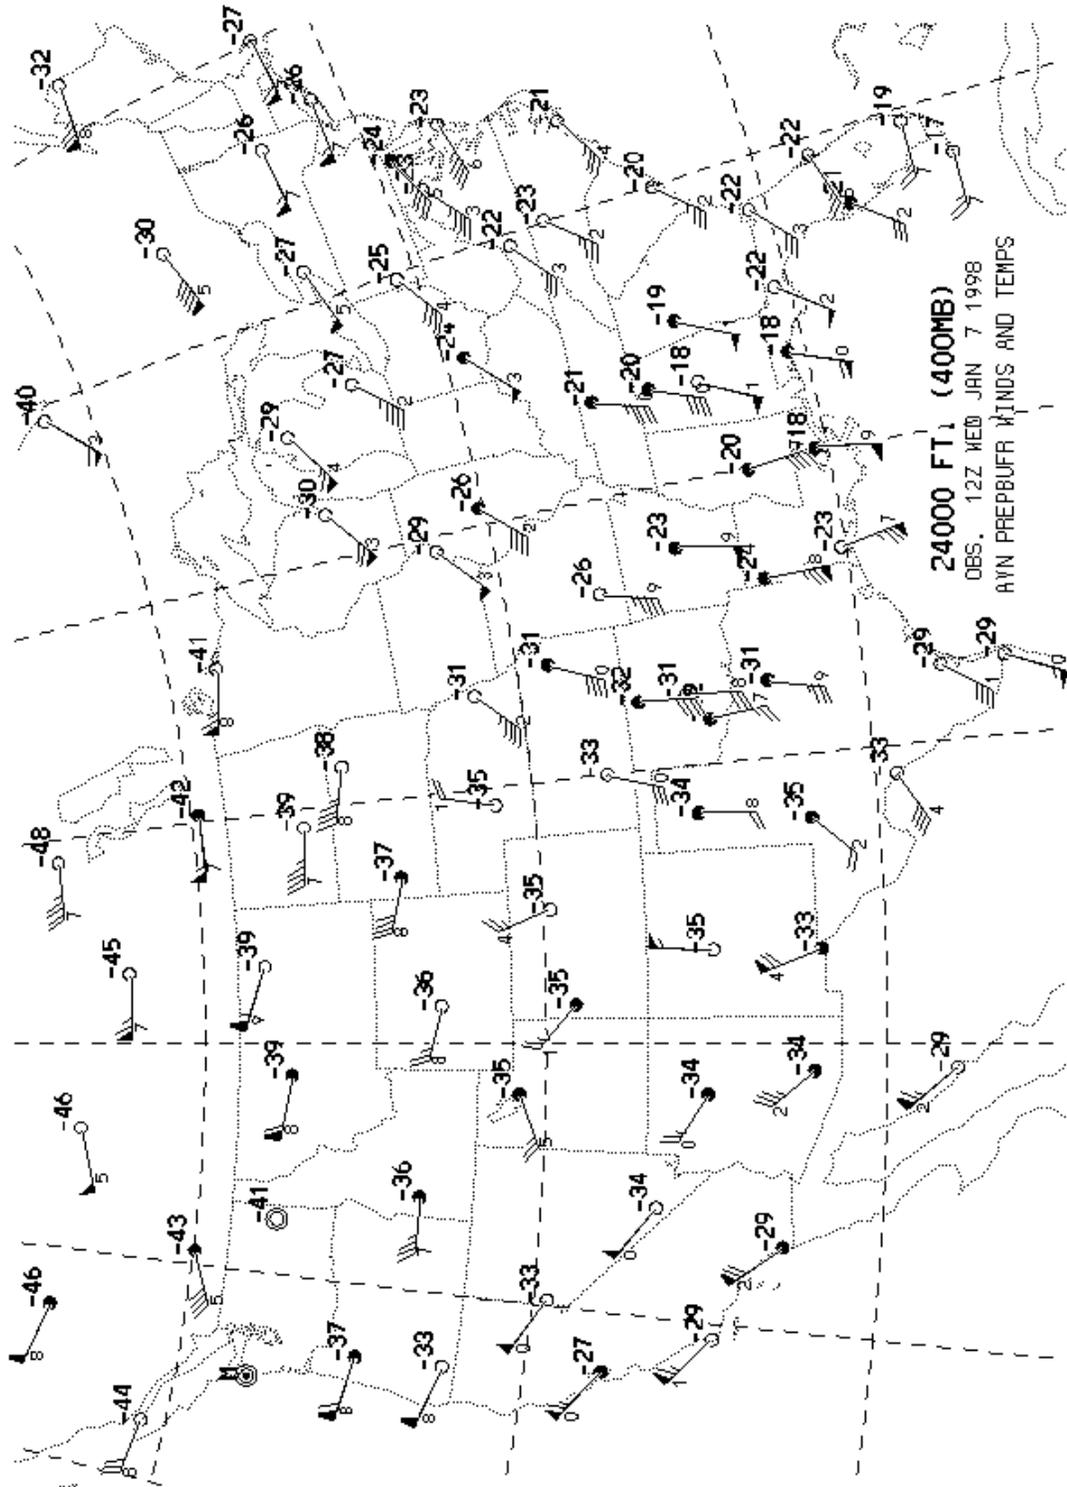


Figure 10-4. Panel from Observed Winds and Temperatures Aloft Chart.

## Section 11

### SIGNIFICANT WEATHER PROGNOSTIC CHARTS

Significant weather prognostic charts (progs) (Figure 11-1) portray forecasts of selected weather conditions at specified valid times. Each valid time is the time at which the forecast conditions are expected to occur. Forecasts are made from a comprehensive set of observed weather conditions. The observed conditions are extended forward in time and become forecasts by considering atmospheric and environmental processes. Forecasts are made for various periods of time. A 12-hour prog is a forecast of conditions which has a valid time 12 hours after the observed data base time, thus a 12-hour forecast. A 24-hour prog is a 24-hour forecast, and so on. For example, a 12-hour forecast based on 00Z observations is valid at 12Z. Altitude information on the prog charts is referenced to mean sea level (MSL) and compatible with aviation. Altitudes below 18,000 feet are true altitudes while above 18,000 feet are pressure altitudes or flight levels (FL). The prog charts for the conterminous United States are generated for two general time periods. Day 1 progs are forecasts for the first 24-hour period. Day 2 progs are forecasts for the second 24-hour period. Day 1 prog charts are prepared for two altitude references in the atmosphere. Forecast information for the surface to 24,000 feet is provided by the low-level significant weather prog chart. Forecast information from above 24,000 to 60,000 feet is provided by the high-level significant weather prog chart. The day 2 prog chart is prepared without regard to altitude and is provided by the 36- and 48-hour surface prog chart.

#### **U.S. LOW-LEVEL SIGNIFICANT WEATHER (SIG WX) PROG**

The low-level significant weather prog chart (Figure 11-1) is a day 1 forecast of significant weather for the conterminous United States. Weather information provided pertains to the layer from surface to FL240 (400 mbs.) The information is provided for two forecast periods, 12 hours and 24 hours. The chart is composed of four panels. The two lower panels depict the 12- and 24-hour surface progs that are produced at Hydrometeorological Prediction Center (HPC) in Camp Springs, Maryland. The two upper panels depict the 12- and 24-hour significant weather progs that are produced at the Aviation Weather Center (AWC) in Kansas City, Missouri. The chart is issued four times a day; and the observation data base times for each issuance are 00Z, 06Z, 12Z, and 18Z.

#### **SURFACE PROG PANELS**

The surface prog panels display forecast positions and characteristics of pressure systems, fronts, and precipitation.

##### **Surface Pressure Systems**

Surface pressure systems are depicted by pressure centers, troughs, and, on selected panels, isobars. High and low pressure centers are identified by "Hs" and "Ls" respectively. The central pressure of each center is specified. Pressure troughs are identified by long dashed lines and labeled "TROF." Isobars are shown on selected panels. Isobars are drawn as solid lines and portray pressure patterns. The value of each isobar is identified by a two-digit code placed on each isobar. Isobars are drawn with intervals of 8 mbs relative to the 1,000 mb isobar. Note that this interval is larger than the 4-mb interval used on the surface analysis chart. The 8-mb interval provides a less sensitive analysis of pressure patterns than the 4-mb interval. Occasionally, nonstandard isobars will be drawn using 4-mb intervals to highlight patterns with weak pressure gradients. Nonstandard isobars are drawn as dashed lines. Examples of standard isobars drawn are the 992; 1,000; and 1,008 mb isobars.

## **Fronts**

Surface fronts are depicted on each panel. Formats used are the standard symbols and three-digit characterization code used on the surface analysis chart. (See Section 5.)




## **Precipitation**

Solid lines enclose precipitation areas. Symbols specify the forms and types of precipitation. (See Table 11-1.) A mix of precipitation is indicated by the use of two pertinent symbols separated by a slash. Identifying symbols are positioned within or adjacent to the precipitation areas. Precipitation conditions are described further by the use of shading. Stable precipitation events are classified as continuous or intermittent. Continuous precipitation is a dominant and widespread event and, therefore, shaded. Intermittent precipitation is a periodic and patchy event and unshaded. Shading is also used to characterize the coverage of unstable precipitation events. Areas with more than half coverage are shaded, and half or less coverage are unshaded. (See Table 11-2.) A bold dashed line is used to separate precipitation with contrasting characteristics within an outlined area. For example, a dashed line would be used to separate an area of snow from an area of rain.

**Table 11-1 Standard Weather Symbols**

	
<b>Moderate turbulence</b>	<b>Rain shower</b>
	
<b>Severe turbulence</b>	<b>Snow Shower</b>
	
<b>Moderate icing</b>	<b>Thunderstorm</b>
	
<b>Severe icing</b>	<b>Freezing rain</b>
	
<b>Rain</b>	<b>Tropical storm</b>
	
<b>Snow</b>	<b>Hurricane (Typhoon)</b>
	
<b>Drizzle</b>	

**Table 11-2 Significant Weather Prog Symbols**

	
<p><b>Intermittent snow</b></p>	<p><b>Rain showers covering half or less the area</b></p>
	
<p><b>Continuous rain</b></p>	<p><b>Rain showers and thunderstorms covering more than half the area</b></p>

## SIGNIFICANT WEATHER PANELS

The significant weather panels display forecast weather flying categories, freezing levels, and turbulence for the layer surface to FL240. A legend on the chart illustrates symbols and criteria used for these conditions. (See Figure 11-1.)

### Weather Flying Categories

The weather flying categories are visual flight rules (VFR), marginal VFR (MVFR), and instrument flight rules (IFR). Ceiling and visibility criteria used for each category are the same as used for the weather depiction chart. (See Section 6.) IFR areas are enclosed by solid lines. MVFR areas are enclosed by scalloped lines. All other areas are VFR.

### Freezing Levels

The surface freezing level is depicted by a zigzag line and labeled "SFC." The surface freezing level separates above-freezing from below-freezing temperatures at the Earth's surface. Freezing levels aloft are depicted by thin, short dashed lines. Lines are drawn at 4,000-foot intervals beginning at 4,000 feet and labeled in hundreds of feet. For example, "80" identifies the 8,000-foot contour. Freezing level heights are referenced to MSL. The lines are discontinued where they intersect corresponding altitudes of the Rocky Mountains. The freezing level values for locations between lines is determined by linear interpolation. For example, the freezing level midway between the 4,000 and 8,000 foot lines is 6,000 feet. Areas with forecast multiple freezing levels have lines drawn to the highest freezing level. For example, with freezing levels forecast at 2,000, 6,000, and 8,000 feet, the analysis is drawn to the 8,000 foot value. Notice that not all freezing levels are identified with a multiple freezing level event. Information about the 2,000- and 6,000-foot freezing levels in this example would not be displayed. Surface-based multiple freezing levels are located over areas which have below-freezing temperatures at the surface and above-freezing temperatures within at least one layer aloft. Freezing rain and freezing drizzle (freezing precipitation) are associated with surface-based multiple freezing levels. The

intersection of the surface freezing level line and freezing level contours encloses an area with surface-based multiple freezing levels.

### **Turbulence**

Areas of moderate or greater turbulence are enclosed by bold, long dashed lines. Turbulence intensities are identified by symbols. The vertical extent of turbulence layers is specified by top and base heights in hundreds of feet. Height values are relative to MSL with the top and base heights separated by a line. A top height of "240" indicates turbulence at or above 24,000 feet. (The upper limit of the prog is 24,000 feet.) The base height is omitted where turbulence reaches the surface. For example, "080/" identifies a turbulence layer from the surface to 8,000 feet MSL. Thunderstorms always imply a variety of hazardous conditions to aviation including moderate or greater turbulence. Generally, turbulence conditions implied with thunderstorms is not depicted on the chart. However, for added emphasis, moderate to severe turbulence surface to above 24,000 feet is depicted for areas that have thunderstorms with more than half coverage on the surface prog. Intensity symbols and layer altitudes appear within or adjacent to the forecast area.

### **USING THE CHART**

The low-level significant weather prog chart provides an overview of selected flying weather conditions up to 24,000 feet for day 1. Much insight can be gained by evaluating the individual fields of pressure patterns, fronts, precipitation, weather flying categories, freezing levels, and turbulence displayed on the chart. In addition, certain inferences can be made from the chart. Surface winds can be inferred from surface pressure patterns. Structural icing can be inferred in areas which have clouds and precipitation, above freezing levels, and in areas of freezing precipitation. The low-level prog chart can also be used to obtain an overview of the progression of weather during day 1. The progression of weather is the change in position, size, and intensity of weather with time. Progression analysis is accomplished by comparing charts of observed conditions with the 12- and 24-hour prog panels. Progression analysis adds insight to the time-continuity of the weather from before flight time to after flight time. The low-level prog chart makes the comprehension of weather details easier and more meaningful. A comprehensive overview of weather conditions does not provide sufficient information for flight planning. Additional weather details are required. Essential weather details are provided by observed reports, forecast products, and weather advisories. Weather details are often numerous. An effective overview of observed and prog charts allows the many essential details to fit into place and have continuity.

### **36- AND 48-HOUR SURFACE PROG**

The 36- and 48-hour surface prog chart (Figure 11-2) is a day 2 forecast of general weather for the conterminous United States. The chart is an extension of the day 1 U.S. low-level significant weather prog chart issued from the same observed data base time. These two prog charts make up a forecast package. The chart is issued twice daily. The observation data base times for each issuance are 00Z and 12Z. For example, a chart issued based on 00Z Tuesday observations has a 36-hour valid time of 12Z Wednesday and a 48-hour valid time of 00Z Thursday. The chart is composed of two panels and a forecast discussion. The two panels contain the 36- and 48-hour surface progs.

### **SURFACE PROG PANELS**

The surface prog panels display forecast positions and characteristics of pressure patterns, fronts, and precipitation.

## **Surface Pressure Systems**

Surface pressure systems are depicted by pressure centers, troughs, and isobars. Formats used for each feature are the same as used for the surface prog panels of the U.S. low-level significant weather prog chart.

## **Fronts**

Surface fronts are depicted by using the standard symbols and three-digit characterization code used on the surface analysis chart. (See Section 5.)

## **Precipitation**

Precipitation areas are outlined on each panel. Formats used to locate and characterize precipitation are the same as used for the surface prog panels of the U.S. low-level prog chart.

## **FORECAST DISCUSSION**

The forecast discussion is a discussion of the day 1 and day 2 forecast package. The discussion will include identification and characterization of weather systems and associated weather conditions portrayed on the prog charts.

## **USING THE CHART**

The 36- and 48-hour surface prog chart provides an outlook of general weather conditions for day 2. The 36- and 48-hour prog can also be used to assess the progression of weather through day 2.


## **HIGH-LEVEL SIGNIFICANT WEATHER PROG**

The high-level significant weather prog (Figures 11-3 and 11-4) is a day 1 forecast of significant weather. Weather information provided pertains to the layer from above 24,000 to 60,000 feet (FL250-FL600). The prog covers a large portion of the Northern Hemisphere and a limited portion of the Southern Hemisphere. Coverage ranges from the eastern Asiatic coast eastward across the Pacific, North America, and the Atlantic into Europe and northwestern Africa. The prog extends southward into northern South America. The area covered by the prog is divided into sections. Each section covers a part of the forecast area. Some sections overlap. The various sections are formatted on polar or Mercator projection background maps and issued as charts. Each prog chart is issued four times a day. The valid times are 00Z, 06Z, 12Z, and 18Z. Conditions routinely appearing on the chart are jet streams, cumulonimbus clouds, turbulence, and tropopause heights. Surface fronts are also included to add perspective. Other conditions will appear on the chart as pertinent. They are tropical cyclones, squall lines, volcanic eruption sites, and sandstorms and dust storms.

### Jet Streams

Jet streams with a maximum speed of more than 80 knots are identified by bold lines. Jet stream lines lie along the core of maximum winds. Arrowheads on the lines indicate the orientation of each jet stream. Double hatched lines positioned along the jet core identify changes of wind speed. These speed indicators are drawn at 20-knot intervals and begin with 100 knots. Wind speed maximums along the jet core are characterized by wind symbols and altitudes. A standard wind symbol (shaft, pennants, and barbs) is placed at each pertinent position to identify velocity. The altitude in hundreds of feet prefaced with "FL" is placed adjacent to each wind symbol.


Example:

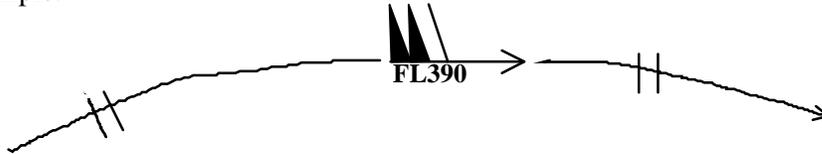

### Cumulonimbus Clouds

Cumulonimbus clouds (CBs) are thunderstorm clouds. Areas of CBs meeting select criteria are enclosed by scalloped lines. The criteria are widespread CBs within an area or along a line with little or no space between individual clouds, and CBs are embedded in cloud layers or concealed by haze or dust. The prog does not display isolated or scattered CBs (one-half or less coverage) which are not embedded in clouds, haze, or dust. Cumulonimbus areas are identified with "CB" and characterized by coverage and tops. Coverages are identified as isolated (ISOL), occasional (OCNL), and frequent (FRQ). Isolated and occasional CBs are further characterized as embedded (EMBD.) Coverage values for the identifiers are: isolated - less than 1/8; occasional - 1/8 to 4/8; and frequent - more than 4/8. Tops are identified in hundreds of feet using the standard top and base format. Bases extend below 24,000 feet (below the prog's forecast layer) and are encoded "XXX." The identification and characterization of each cumulonimbus area will appear within or adjacent to the outlined area. Thunderstorms always imply a variety of aviation hazards including moderate or greater turbulence and hail.

Examples:

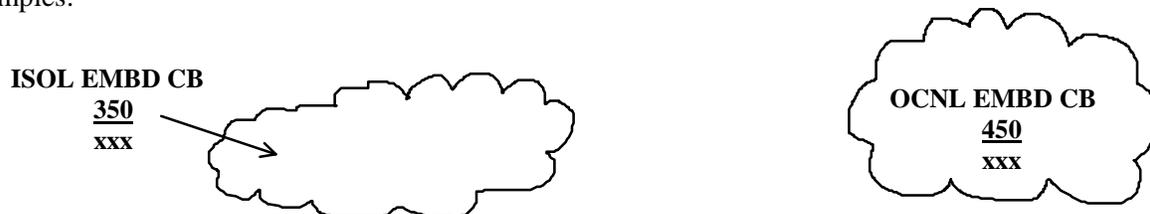


### Turbulence

Areas of moderate or greater turbulence are enclosed by bold dashed lines. Turbulence conditions identified are those associated with wind shear zones and mountain waves. Wind shear zones include speed shears associated with jet streams and areas with sharply curved flow. Turbulence associated with thunderstorms is not identified. (Thunderstorms imply turbulence.) Turbulence intensities are identified by symbols. The vertical extent of turbulence layers is specified by top and base heights in hundreds of feet. Turbulence bases which extends below the layer of the chart are identified with "XXX." Top and

base heights are separated by a line. Height values are pressure altitudes. For example, "310/XXX" identifies a layer of turbulence from below FL240 to FL310.


Example:

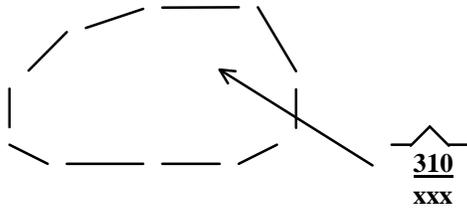

### Tropopause Heights

Tropopause heights are plotted in hundreds of feet at selected locations. Heights are enclosed by rectangles. Centers of high and low heights are identified with "H" and "L" respectively along with their heights and enclosed by polygons.


Examples:



### Surface Fronts

Surface fronts are depicted on the prog to provide added perspective. Symbols used are the standard symbols used on the surface analysis chart. Movements of fronts are identified at selected positions. A vector with a number plotted adjacent to the vector identifies the direction and speed of movement. (See Section 5.)

Example:

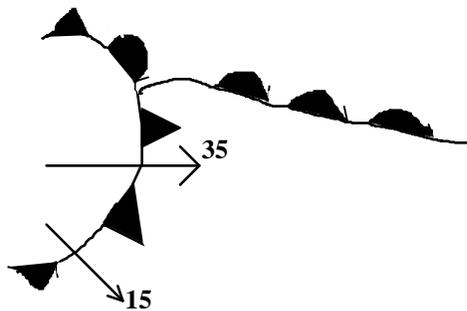

## Tropical Cyclones

The positions of hurricanes, typhoons, and tropical storms are depicted by symbols. The only difference between the hurricane/typhoon symbol and tropical storm symbol is the circle of the hurricane/typhoon symbol is shaded in. When pertinent, the name of each storm is positioned adjacent to the symbol. Cumulonimbus cloud activity meeting chart criteria is identified and characterized relative to each storm.

Example:



## Squall Lines

Severe squall lines are lines of CBs with 5/8 coverage or greater. Squall lines are identified by long dashed lines, and each dash is separated by a "v." Cumulonimbus cloud activity meeting chart criteria is identified and characterized with each squall line.


Example:



## Volcanic Eruption Sites

Volcanic eruption sites are identified by a trapezoidal symbol. The dot on the base of the trapezoid locates the latitude and longitude of the volcano. The name of the volcano, its latitude, and its longitude are noted adjacent to the symbol. Pertinent SIGMETs containing information regarding volcanic ash will be in effect.


Example:

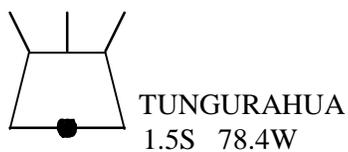

### **Sandstorms and Dust Storms**

Areas of widespread sandstorms and dust storms are labeled by symbol. The symbol with the arrow depicts areas of widespread sandstorm or dust storm, while the symbol without the arrow depicts severe sandstorm or dust haze.

Example:



### **USING THE CHART**

The high-level sig weather prog is used to get an overview of selected flying weather conditions above 24,000 feet. Much insight can be gained by evaluating jet streams, cumulonimbus clouds, turbulence, associated surface fronts, significant tropical storm complexes including tropical cyclones, squall lines, sandstorms, and dust storms.

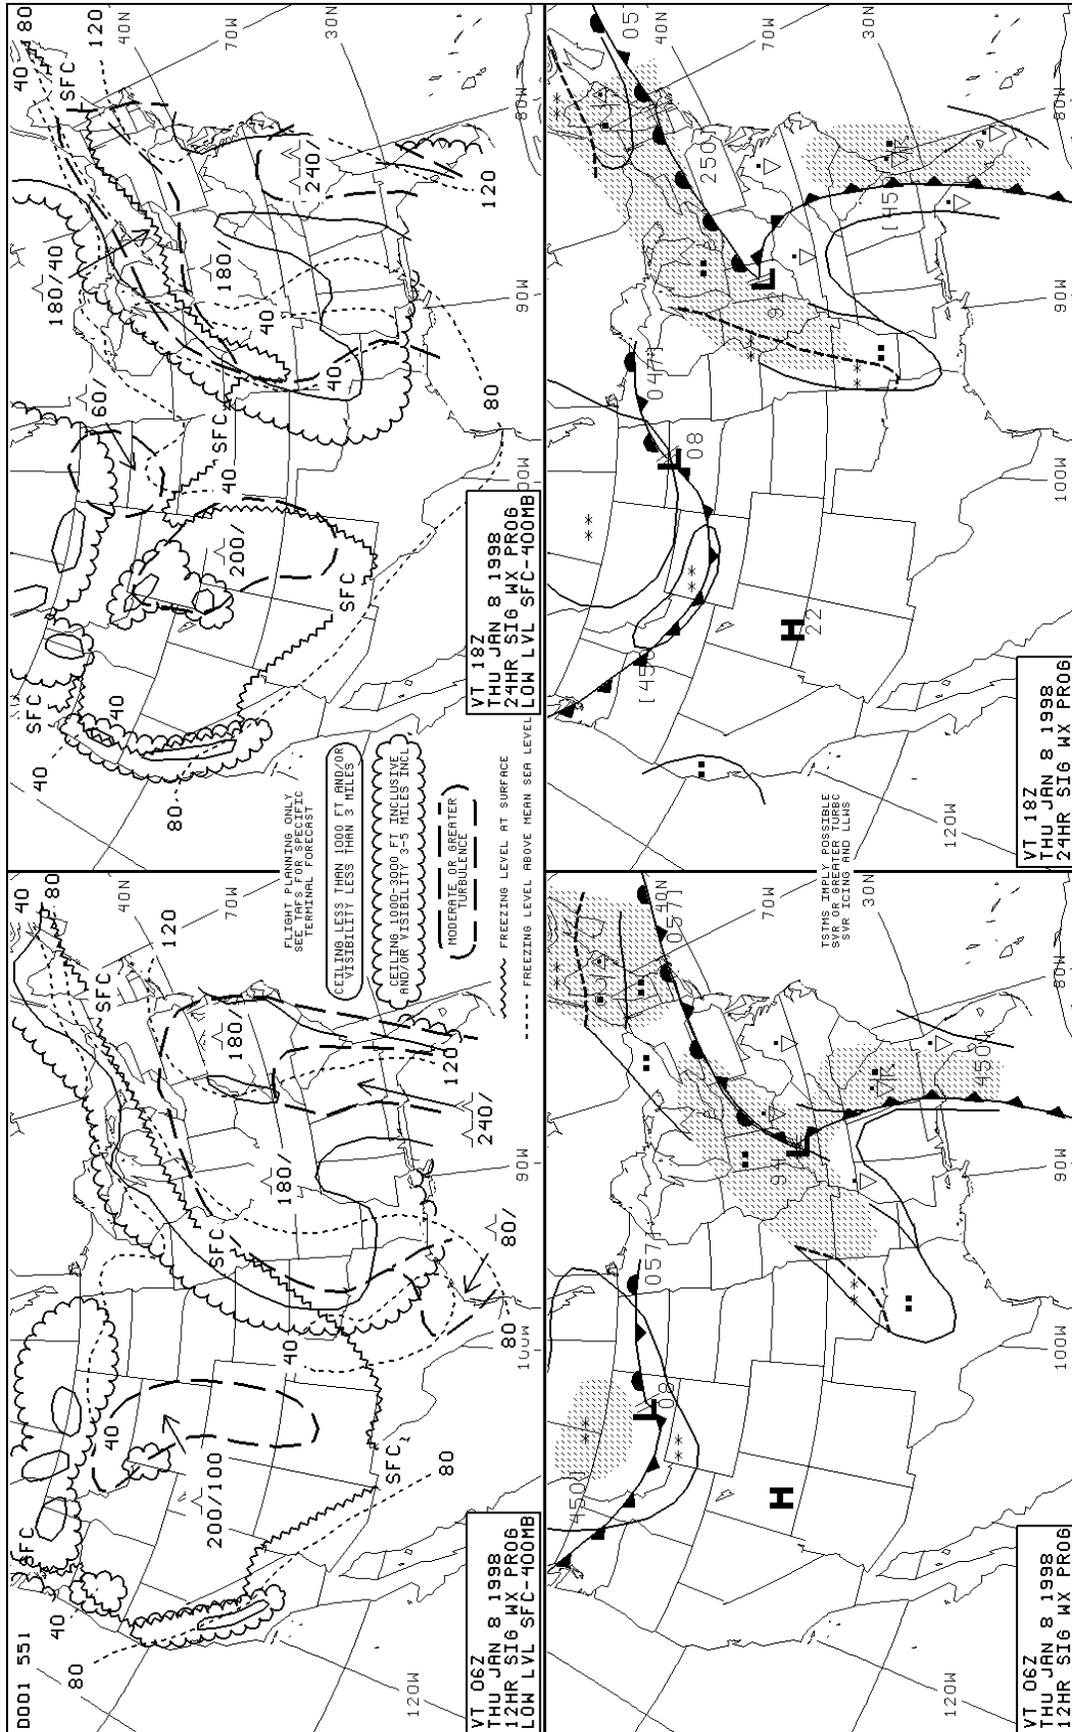


Figure 11-1. U.S. Low-Level Significant Weather Prog.

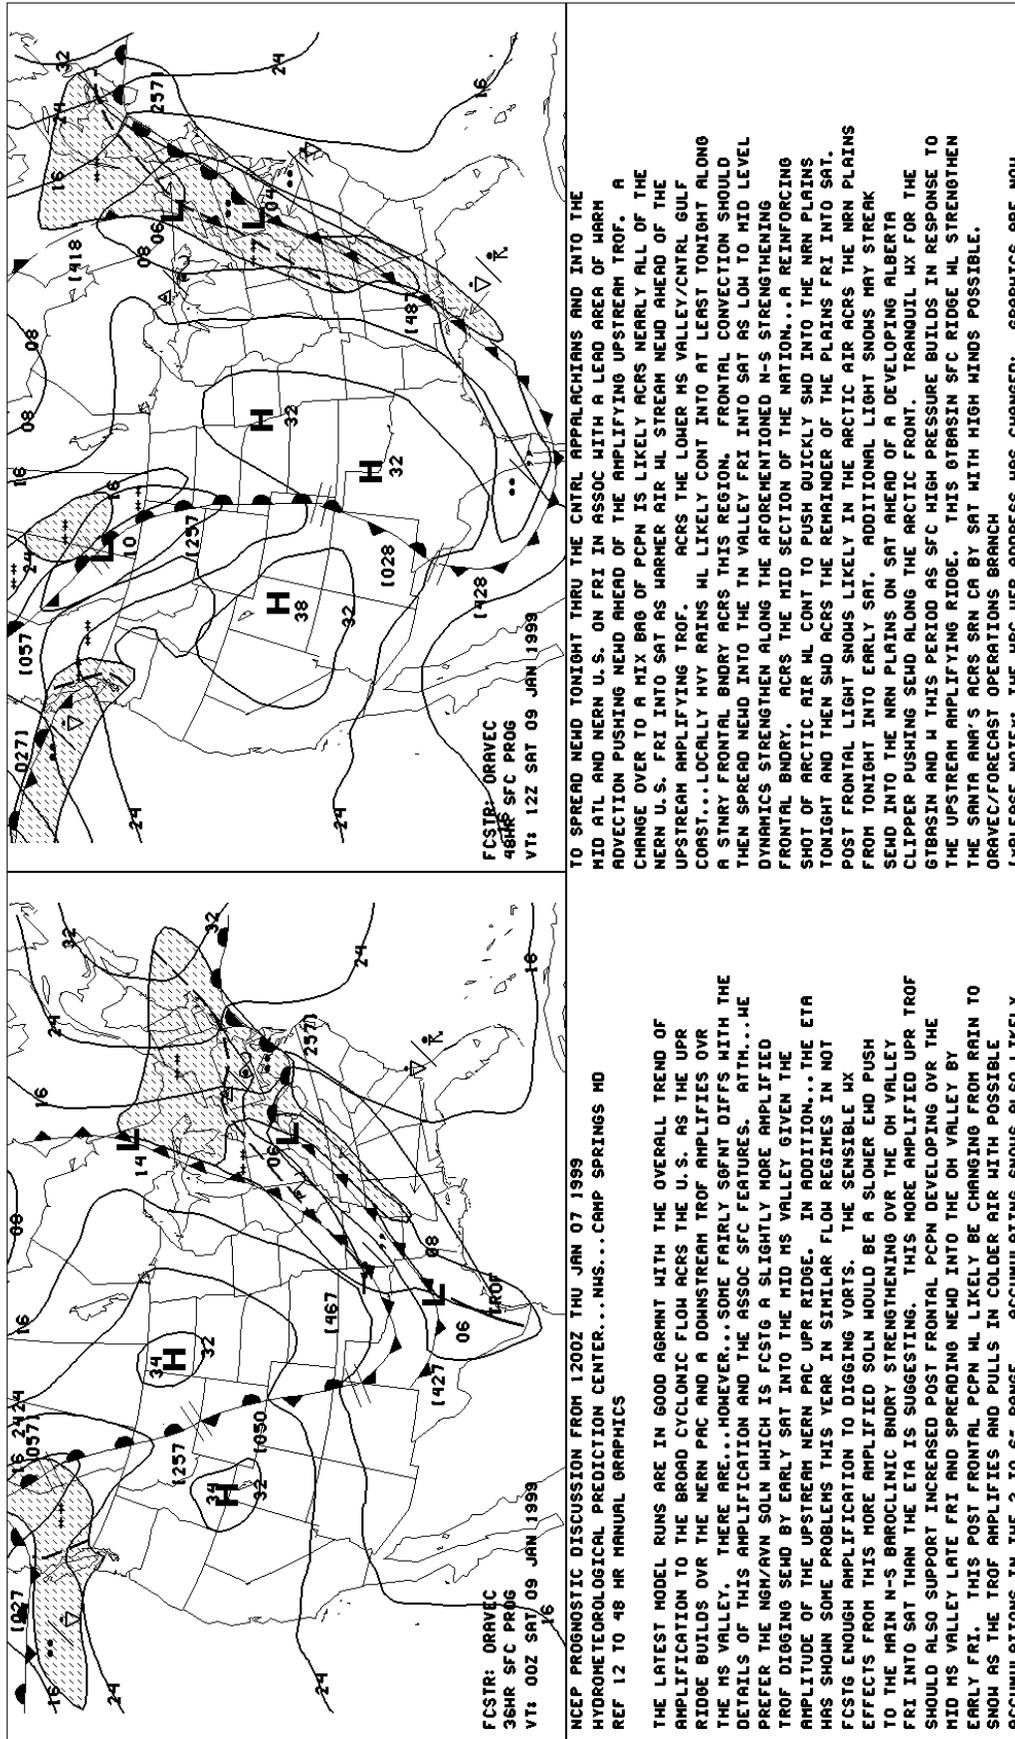


Figure 11-2. U.S. Low-Level Significant Weather Prog.

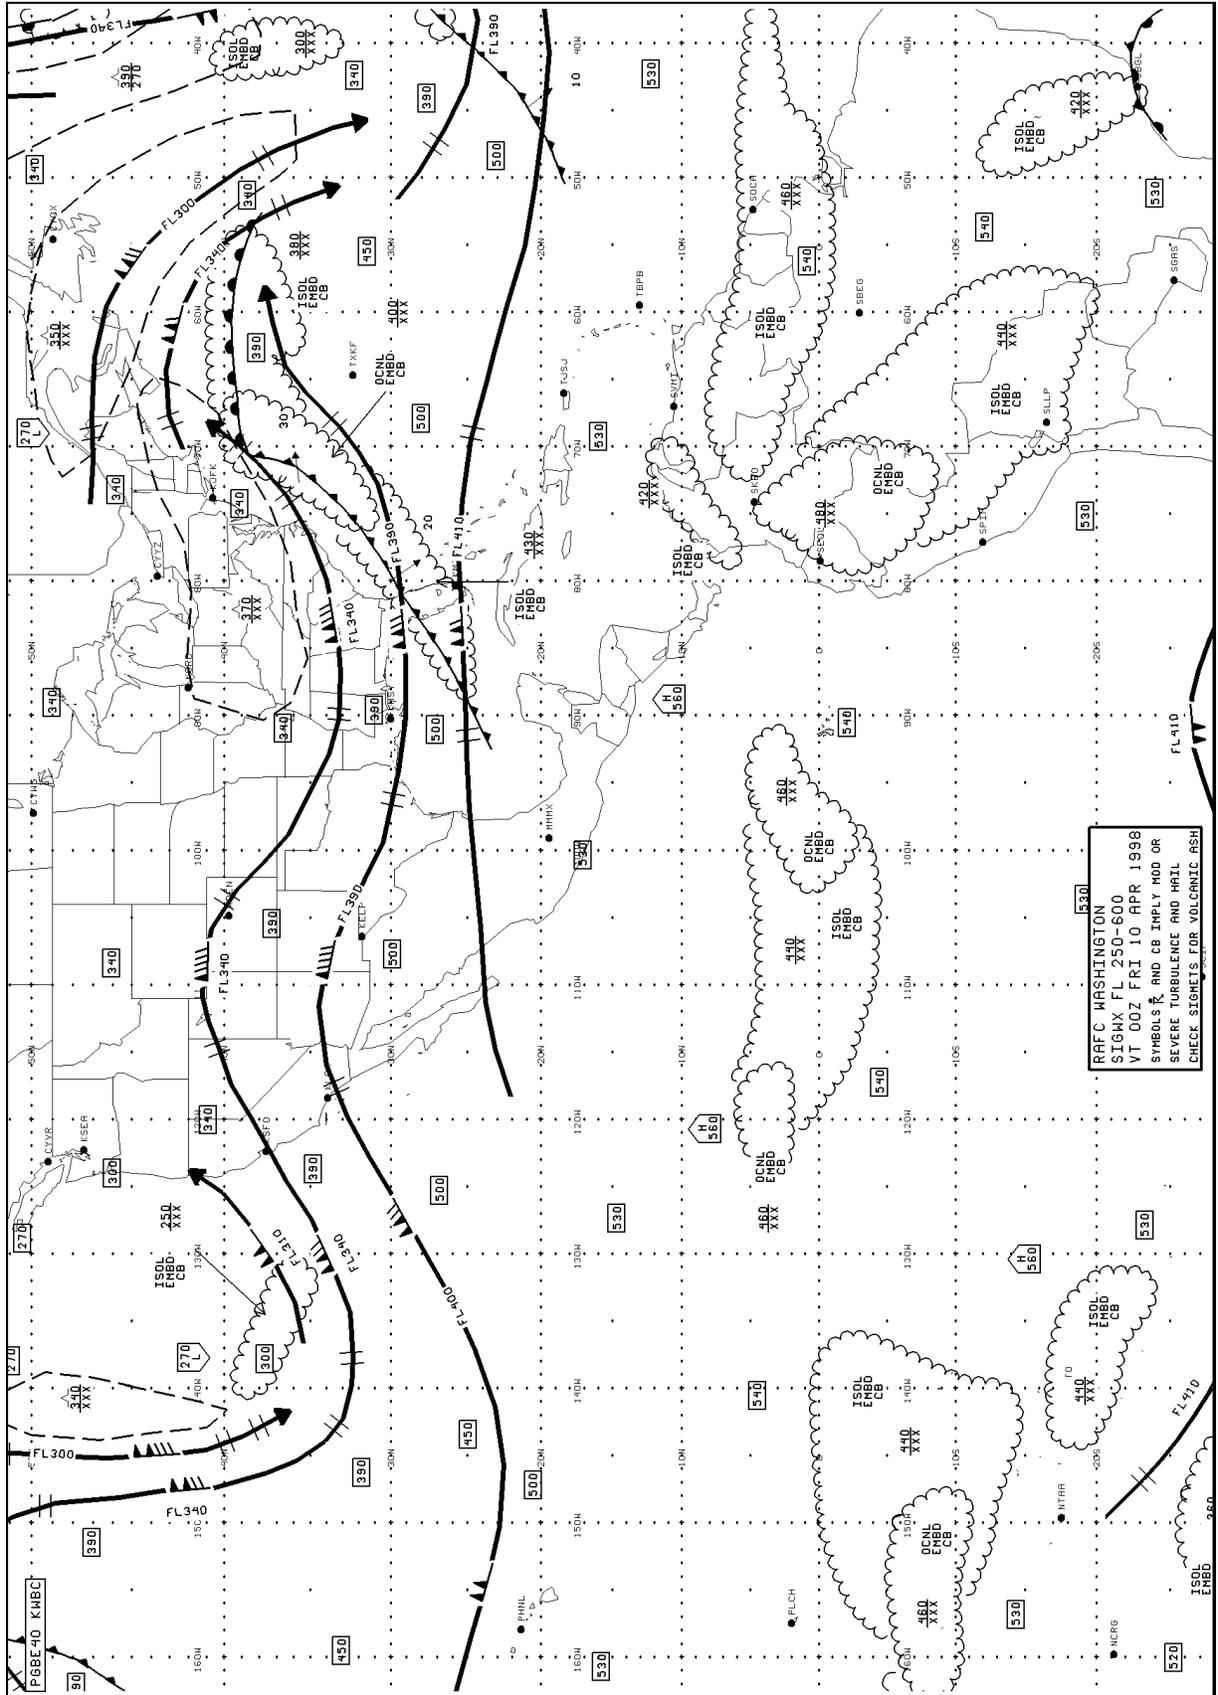


Figure 11-3. U.S. High-Level Significant Weather Prog.

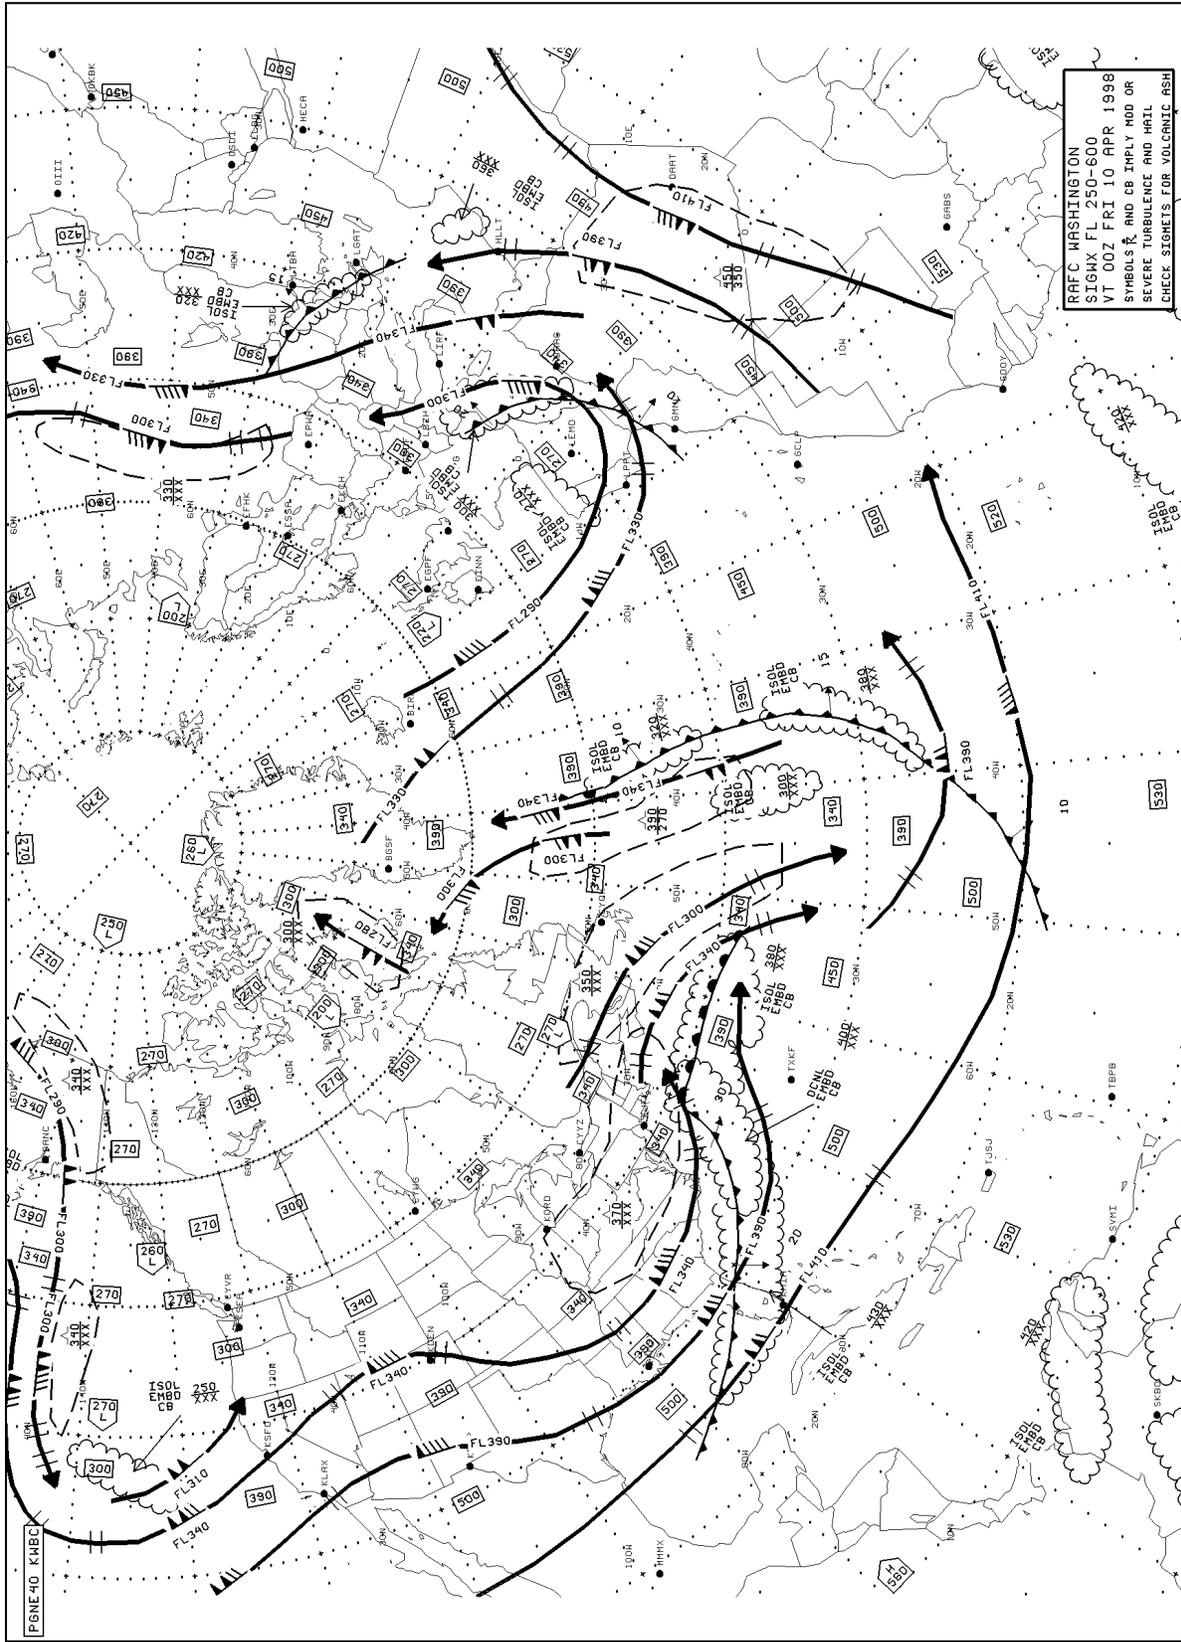


Figure 11-4. International High-Level Significant Weather Prog.

## **Section 12**

### **CONVECTIVE OUTLOOK CHART**

The convective outlook chart (Figure 12-1) delineates areas forecast to have thunderstorms. This chart is presented in two panels. The left-hand panel is the Day 1 Convective Outlook, and the right-hand panel is the Day 2 Convective Outlook. These guidance products are produced at the Storm Prediction Center (SPC) in Norman, OK.

#### **DAY 1 CONVECTIVE OUTLOOK**

The Day 1 Convective Outlook (Figure 12-1) outlines areas in the continental United States where thunderstorms are forecasted during the Day 1 period. It is issued five times daily. The first issuance is 06Z and is the initial Day 1 Convective Outlook that is valid 12Z that day until 12Z the following day. The other issuances are 1300Z, 1630Z, 2000Z, and 0100Z, and all issuances are valid until 12Z the following day.

The outlook issued qualifies the level of risk (i.e., SLGT, MDT, HIGH) as well as the areas of general thunderstorms.

#### **DAY 2 CONVECTIVE OUTLOOK**

The Day 2 Convective Outlook contains the same information as the Day 1 Convective Outlook. It is issued twice a day. It is initially issued at 0830Z during standard time and 0730Z during daylight time. It is updated at 1730Z. The timeframe covered is from 12Z the following day to 12Z the next day. For example, if today is Monday, the Day 2 Convective Outlook will cover the period 12Z Tuesday to 12Z Wednesday.

The outlook issued qualifies the level of risk (i.e., SLGT, MDT, HIGH) as well as the areas of general thunderstorms.

#### **LEVELS OF RISK**

Risk areas come in three varieties and are based on the expected number of severe thunderstorm reports per geographical unit and forecaster confidence. Table 12-1 indicates the labels that appear on both the Day 1 and Day 2 Convective Outlook charts.

**Table 12-1 Notations of Risk**

<b>NOTATION</b>	<b>EXPLANATION</b>
<b>SEE TEXT</b>	<b>Used for those situations where a SLGT risk was considered but at the time of the forecast, was not warranted.</b>
<b>SLGT (Slight risk)</b>	<b>A high probability of 5 to 29 reports of 1 inch or larger hail, and/or 3-5 tornadoes, and/or 5 to 29 wind events,...or...a low/moderate probability of moderate to high risk being issued later if some conditions come together</b>
<b>MDT (Moderate risk)</b>	<b>A high probability of at least 30 reports of hail 1 inch or larger; or 6-19 tornadoes; or numerous wind events (30).</b>
<b>HIGH (High risk)</b>	<b>A high probability of at least 20 tornadoes with at least two of them rated F3 (or higher), or an extreme derecho causing widespread (50 or more) wind events with numerous higher-end wind (80 mph or higher) and structural damage reports</b>

SEE TEXT is used for those situations where a slight risk was considered, but at the time of the forecast, was not warranted. Although there is no severe outlook for the labeled area, users should read the text of the convective outlook (AC) forecast message to learn more about the potential for a threat to develop if some particular conditions do come together.

Slight (SLGT) risk implies well-organized severe thunderstorms are expected but in small numbers and/or low coverage.

Moderate (MDT) risks imply a greater concentration of severe thunderstorms, and in most situations, greater magnitude of severe weather.

High (HIGH) risk almost always means a major severe weather outbreak is expected, with great coverage of severe weather and enhanced likelihood of extreme severe events (i.e., violent tornadoes or unusually intense damaging wind events). SPC issues a public information statement (PWO) describing a "particularly dangerous situation" when HIGH risk areas are in effect, and it sometimes issues a PWO for MDT risk situations. Some National Weather Service (NWS) offices will include in their public forecasts the phrase "some thunderstorms may be severe" when a MDT or HIGH risk is issued.

In addition to the severe risk areas, general thunderstorms (non-severe) are outlined, but with no label on the graphic map.

**USING THE CHART**

The Day 1 and Day 2 Convective Outlooks Charts are flight planning tools used to determine forecast areas of thunderstorms.

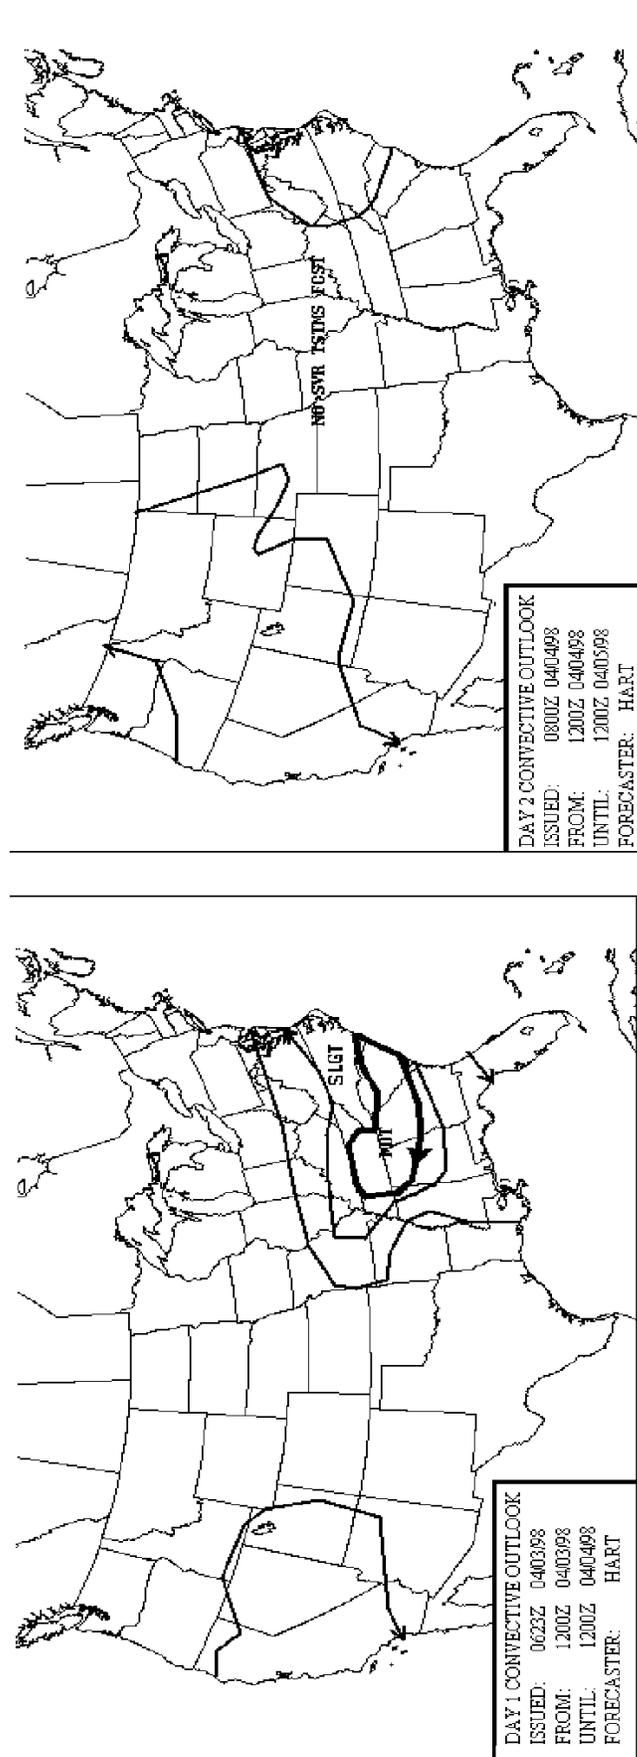


Figure 12-1. Severe Weather Outlook Chart.

### **Section 13**

#### **VOLCANIC ASH ADVISORY CENTER (VAAC) PRODUCTS**

The Volcanic Ash Advisory Center (VAAC) may issue two products when there is a volcanic eruption: the Volcanic Ash Advisory Statement (VAAS) and forecast charts of ash dispersion. The U.S. VAACs are the AAWU in Anchorage, Alaska, and the Washington, D.C. VAAC located in Camp Springs, Maryland. Other international centers contribute to the tracking of volcanic ash events. The VAACs do not issue routine products but create and issue them when a volcanic eruption occurs. The products are based on information from PIREPs, MWO SIGMETs, satellite observations, and volcanic observatory reports. Since the products are triggered by the occurrence of an eruption, pilot reports concerning volcanic activity are extremely important.

#### **VOLCANIC ASH ADVISORY STATEMENT (VAAS)**

Usually the first VAAC product to be issued is the Volcanic Ash Advisory Statement (VAAS). The VAAS is required to be issued within 6 hours of an eruption and every 6 hours after that. However, it can be issued more frequently if new information about the eruption is received. The VAAS summarizes the currently known information about the eruption. It may include the location of the volcano, height of the volcano summit, height of the ash plume, a latitude/longitude box of the ash dispersion cloud, and a forecast of ash dispersion. The height of the ash cloud is estimated by meteorologists analyzing satellite imagery and satellite cloud drift winds combined with any pilot reports, volcano observatory reports, and upper-air wind reports. The VAASs are transmitted to users via the Global Telecommunications System (GTS), the World Area Forecast System (WAFS), the Aeronautical Fixed Telecommunications Network (AFTN), the FAA communications system (WMWCR), and the NWS Family of Services. In addition, VAASs are available on several Internet sites listed on the last page of this document.

December 1999

Example of a VAAS:

FVAK20 PANC 190323

VOLCANIC ASH ADVISORY - ALERT

ALASKA AVIATION WEATHER UNIT

NATIONAL WEATHER SERVICE ANCHORAGE AK

ISSUED 0300 UTC SUNDAY JULY 19 1998 BY ANCHORAGE VAAC

VOLCANO: KARYMSKY (1000-13) 98-01

KAMCHATKA 54.05N 159.43E 1486 M 4875 FT

SOURCES OF INFORMATION: PILOT REPORT

ERUPTION DETAILS: ERUPTION TO FL100 REPORTED BY PILOT REPORT AT 19/0200 UTC VIA WASHINGTON DC VAAC.

ASH CLOUD DESCRIPTION: N/A

ASH CLOUD TRAJECTORY: NE 10 KT.

12 HOUR OUTLOOK: IF ASH PERSISTS ALOFT AT 12 HOURS THE FORECAST AREA FROM THE PUFF MODEL BELOW 15000FT IS 56N 161E, 55N 166E, 54N 165E, 55N 162E.

ADDITIONAL INFORMATION: NO ERUPTION VISIBLE ON SATELLITE IMAGERY DUE TO CLOUD IN AREA.

THIS WILL BE THE ONLY ADVISORY ISSUED FOR THIS EVENT.

DAC JUL98 AAWU

### **VOLCANIC ASH FORECAST TRANSPORT AND DISPERSION (VAFTAD) CHART**

The Volcanic Ash Forecast Transport and Dispersion (VAFTAD) Chart, Figures 13-1 and 13-2, is generated by a three-dimensional time-dependent dispersion model developed by the National Oceanic and Atmospheric Administration (NOAA) Air Resources Laboratory (ARL). The VAFTAD model focuses on hazards to aircraft flight operations caused by a volcanic eruption with an emphasis on the ash cloud location in time and space. It uses National Centers for Environmental Prediction (NCEP) forecast data to determine the location of ash concentrations over 6-hour and 12-hour intervals, with valid times beginning 6, 12, 24, and 36 hours following a volcanic eruption. This computer-prepared chart is not issued on a routine basis, but only as volcanic eruptions are reported. Since the VAFTAD chart is triggered by the occurrence of volcanic eruption, PIREPs concerning volcanic activity are very important. Initial input to the VAFTAD model run and the resulting chart include: geographic region, volcano name, volcano latitude and longitude, eruption date and time, and initial ash cloud height. Utilizing the NCEP meteorological forecast guidance, volcanic ash particle transport and dispersion are depicted horizontally and vertically through representative atmospheric layers. The charts from an actual eruption will be labeled with ALERT. Another possible reason to generate a chart could be for potential volcanic eruption. This chart would be labeled WATCH as shown on Figure 13-1.

## **VAFTAD PRODUCT**

The VAFTAD product presents the relative concentrations of ash following a volcanic eruption for three layers of the atmosphere in addition to a composite of ash concentration through the atmosphere. Atmospheric layers depicted are: surface to flight level (FL) 200, surface to FL550 (composite), FL200 to FL350, and FL350 to FL550. Figure 13-1 shows 8 panels of ash cloud relative concentrations for 12 to 24 hours; and Figure 13-2 shows 18 to 24 hours after a volcanic eruption. Note that the first 6 hours after the volcanic eruption are not depicted. An appropriate SIGMET will be issued by an MWO for that period concerning the volcanic eruption and the area affected by the ash cloud. The four panels in any column are valid for the same time interval (specified and located below the third panel). The top three panels in each column provide the ash location and relative concentrations for an atmospheric layer, identified by top and bottom flight levels. The highest layer is at the top of the chart. Volcano eruption information is given in the legend at the lower left (see Figure 13-1) which includes the volcano name (with location symbol), latitude and longitude, eruption date and time, duration, and ash column height.

## **USING THE CHART**

The VAFTAD chart is strictly for advanced flight planning purposes. It is not intended to take the place of SIGMETs regarding volcanic eruptions and ash.

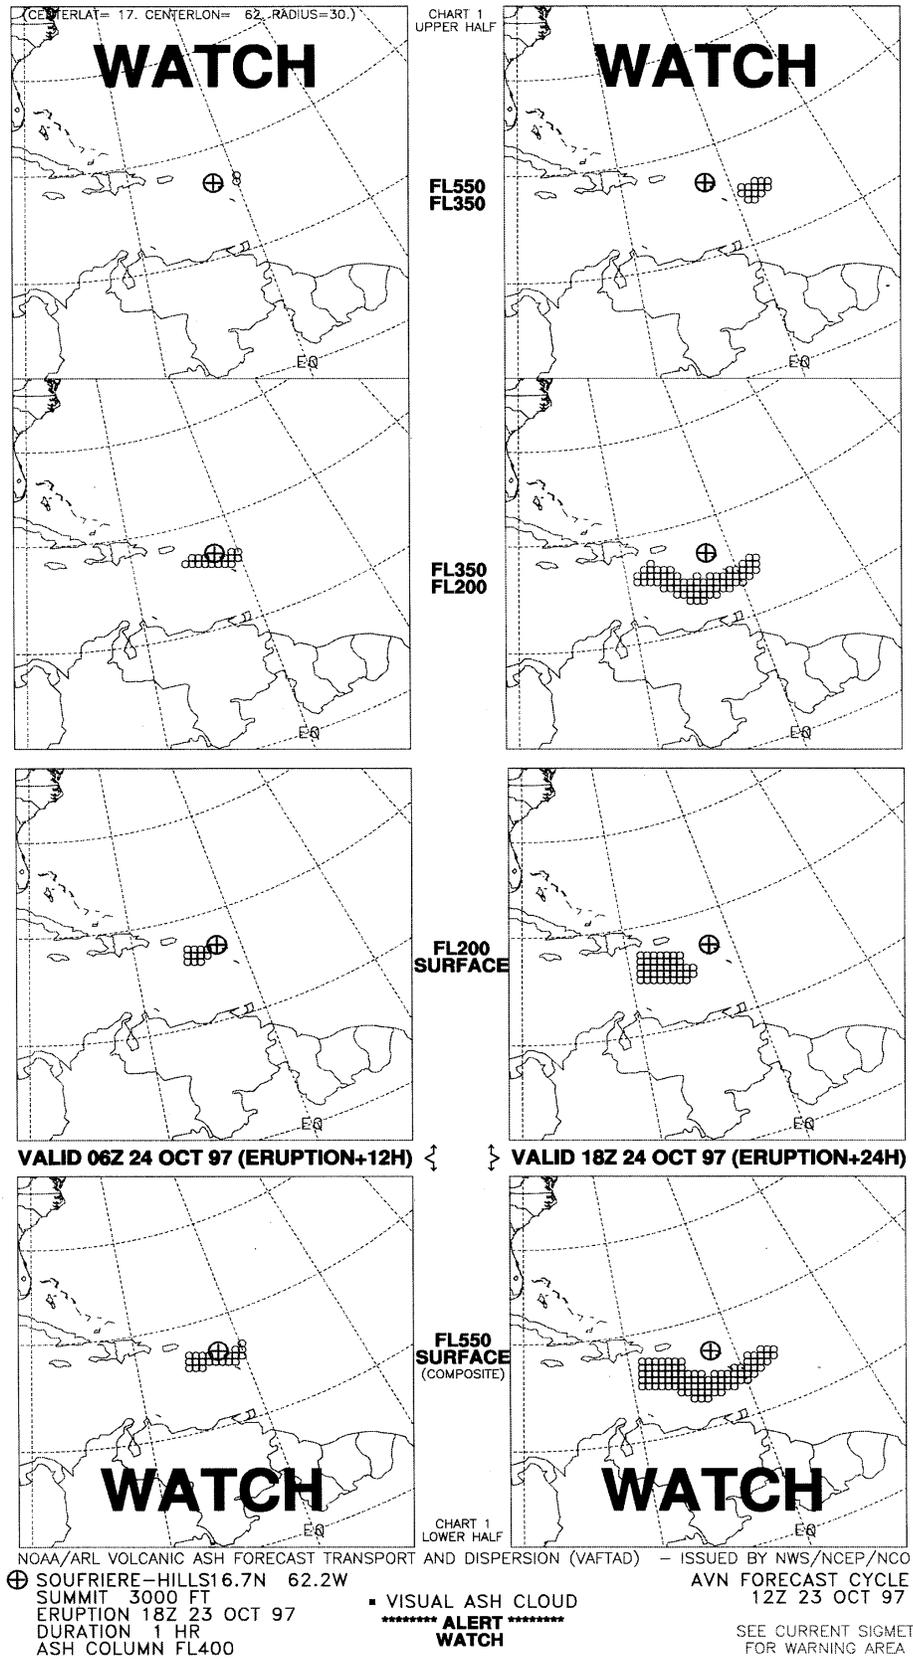


Figure 13-1. Volcanic Ash Forecast Chart.

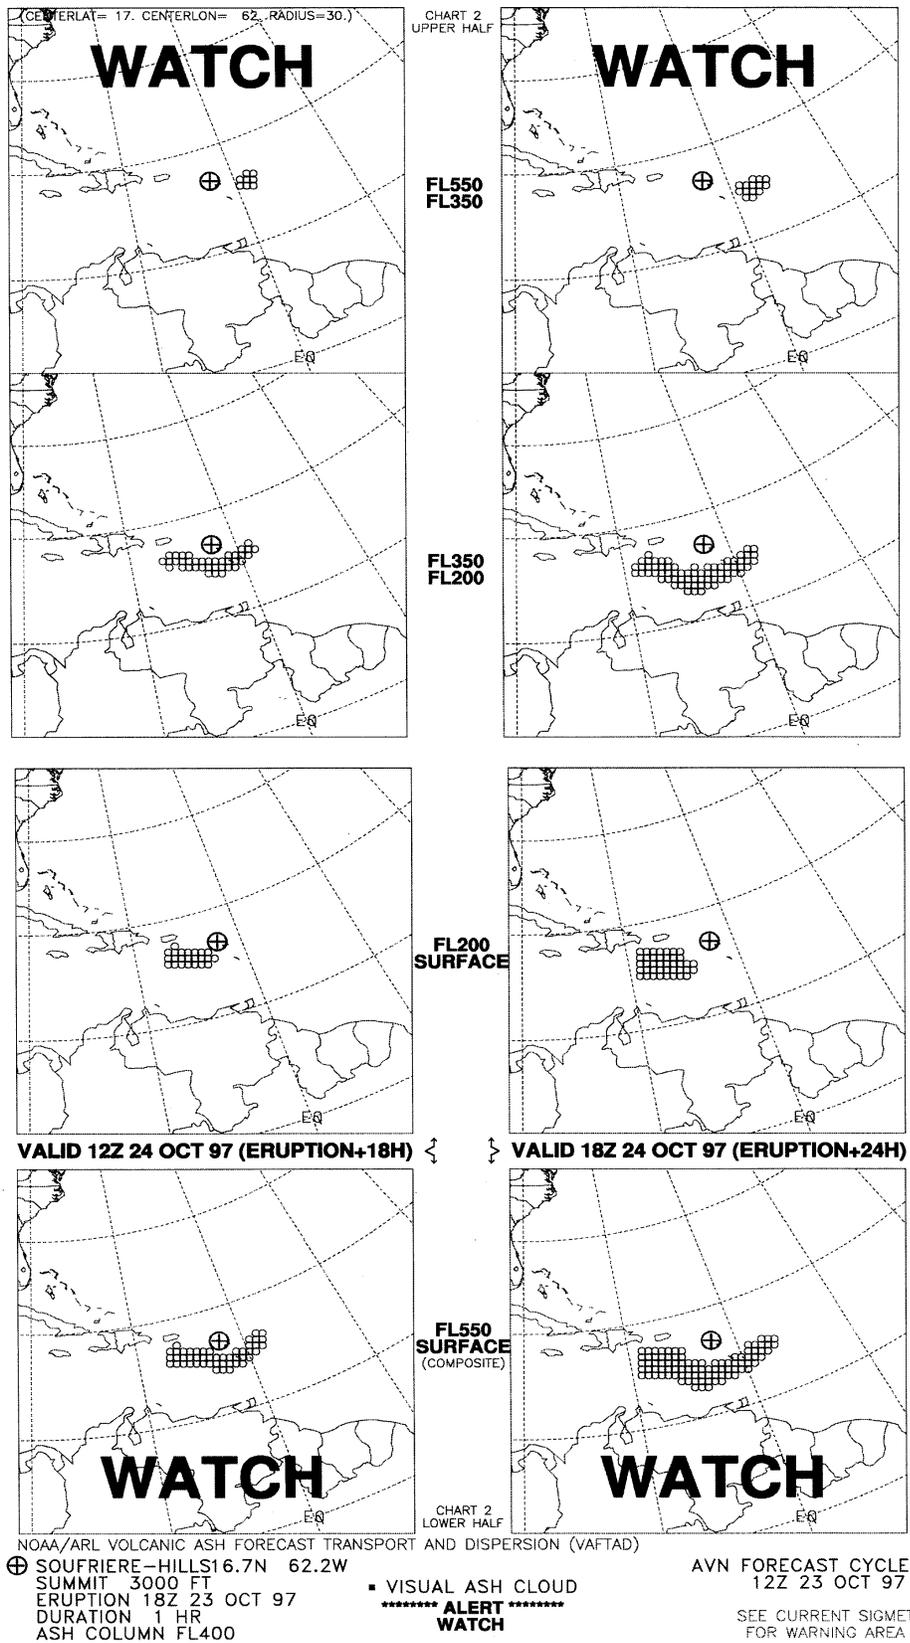


Figure 13-2. Volcanic Ash Forecast Chart.

## Section 14

### **TURBULENCE LOCATIONS, CONVERSION AND DENSITY ALTITUDE TABLES, CONTRACTIONS AND ACRONYMS, SCHEDULE OF PRODUCTS, NATIONAL WEATHER SERVICE STATION IDENTIFIERS, WSR-88D SITES, AND INTERNET ADDRESSES**

This section provides text, graphs, and tables that can be used by the pilot to further understand the weather. Information included covers:

1. Locations of probable turbulence
2. Standard conversions table
3. Density altitude and chart
4. Contractions and acronyms
5. Scheduled issuance and valid times of forecast products
6. National Weather Service station identifiers and WSR-88D sites
7. Internet addresses

#### **LOCATIONS OF PROBABLE TURBULENCE**

Turbulence occurs due to either terrain features or weather phenomenon which can produce intensities from light to extreme. The type and intensity of the turbulence will depend on the situations as described in the following paragraphs.

#### **LIGHT TURBULENCE**

Light turbulence can be caused by obstruction of the wind in hilly or mountainous terrain. Even with light winds, there can be enough displacement of the wind to produce small-scale eddies or turbulence.

Weather conditions that can cause light turbulence are associated with clear-air convective currents over a heated surface or near and in small cumulus clouds. Weak wind shear in the vicinity of troughs aloft, lows aloft, jet streams, or the tropopause can cause light turbulence. Also in the lower 5,000 feet of the atmosphere, light turbulence can occur when winds are near 15 knots or where the air is colder than the underlying surfaces.

#### **MODERATE TURBULENCE**

Moderate turbulence will be reported in mountainous areas with a wind component of 25 to 50 knots perpendicular to and near the level of the ridge. The turbulence will be located at all levels from the surface to 5,000 feet above the tropopause. The areas most likely to have moderate turbulence is within 5,000 feet of the ridge level, at the base of relatively stable layers below the base of the tropopause, or within the tropopause layer. The turbulence will extend downstream from the lee of the ridge for 150 to 300 miles.

Also, moderate turbulence can be encountered in and near towering cumuliform clouds and thunderstorms (in the dissipating stage).

Moderate turbulence can occur in the lower 5,000 feet of the troposphere when surface winds are 30 knots or more, where heating of the underlying surface is unusually strong, where there is an invasion of very cold air, or in fronts aloft.

December 1999

Wind shear in the vertical direction that exceeds 6 knots per 1,000 feet and/or horizontal wind shear that exceeds 18 knots per 150 miles will produce moderate turbulence.

### **SEVERE TURBULENCE**

Severe turbulence is likely in mountainous areas with a wind component exceeding 50 knots perpendicular to and near the level of the ridge. The location of the severe turbulence will be in 5,000-foot layers at and below the ridge level in rotor clouds or rotor action, at the tropopause, and sometimes at the base of other stable layers below the tropopause. The severe turbulence will extend downstream from the lee of the ridge for 50 to 150 miles.

Severe turbulence can be encountered in and near growing and mature thunderstorms and occasionally in other towering cumuliform clouds.

Severe turbulence will also occur 50 to 100 miles on the cold side of the center of the jet stream, in troughs aloft, and in lows aloft where vertical wind shear exceeds 10 knots per 1,000 feet, and horizontal wind shear exceeds 40 knots per 150 miles.

### **EXTREME TURBULENCE**

Extreme turbulence will be found in mountain wave situations. The turbulence will be located in and below the level of well-developed rotor clouds. Sometimes the turbulence extends to the ground.

Besides mountain wave situations, extreme turbulence will occur in severe thunderstorms. A severe thunderstorm is indicated by large hailstones (diameter  $\frac{3}{4}$  inch or greater), strong radar echoes, or continuous lightning.

**STANDARD CONVERSION TABLE**

This table can be used as a quick reference for conversion between metric and English units.

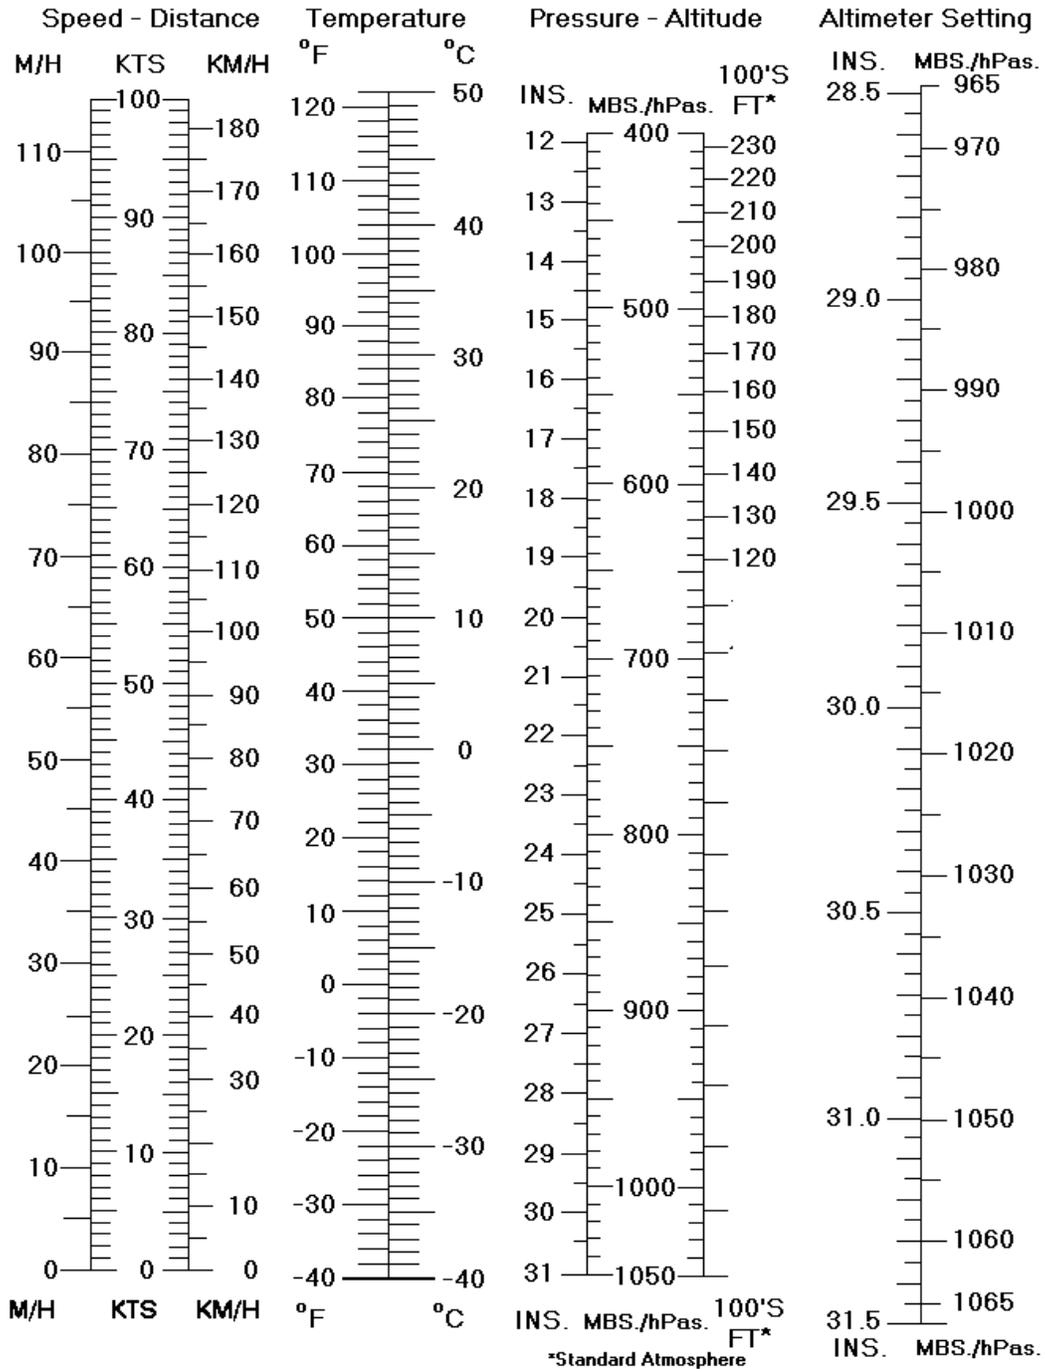


Figure 14-1. Standard Conversion Table.

## **DENSITY ALTITUDE**

Density altitude can affect the takeoff, climb, and landing performance of any aircraft. The distance required to take off and land and the rate of climb are affected by density altitude.

Aircraft will perform better in low density altitude conditions. Low density altitude conditions exist when the air is dense. This occurs when the temperature is cold combined with a high pressure system. The air is the most dense in this situation and the aircraft will perform as if it were at a lower altitude. For example, a plane is at an airport with a station elevation of 7,000 feet MSL. The atmospheric conditions at that airport indicate a low density altitude situation. The density altitude is calculated to be 5,500 feet MSL. The plane will perform as if it were at 5,500 feet MSL instead of 7,000 feet MSL. This low density altitude situation will decrease takeoff and landing roll while increasing the initial rate of climb.

While low density altitude increases aircraft performance, high density altitude can lead to an aircraft accident. High density altitude situations are more prevalent at higher elevations. High temperatures combined with a low pressure system will produce a high density altitude situation. (The air is least dense in this situation.) Airports in mountainous terrain are more susceptible to high density altitude situations because they already have a high station elevation. The combination of a high station elevation, high temperatures, and low pressure will produce a very high density altitude situation. For example, a plane is at an airport with a station elevation of 7,000 feet MSL. Using the values of station elevation, temperature, and pressure, the density altitude is calculated to be 12,000 feet MSL. Any aircraft taking off or landing at that airport will perform as if it were at an airport with a station elevation of 12,000 MSL. For some aircraft, a high density altitude situation will indicate an altitude higher than the service ceiling of that specific aircraft. In that case, if a pilot attempts to take off during a high density situation, the aircraft will not be able to gain altitude but stay in ground effect and possibly crash.

Use Figure 14-2 to find density altitude either on the ground or aloft. Set the aircraft's altimeter at 29.92 inches. The altimeter will indicate pressure altitude. Read the outside air temperature. Enter the graph at the pressure altitude value and move horizontally to the temperature value. Read the density altitude from the sloping lines.

### Examples:

Density altitude in flight: Pressure altitude is 9,500 feet and the temperature is -8 degrees C. Find 9,500 feet on the left of the chart and move to -8 degrees C. Density altitude is 9,000 feet. See dot on the chart that is labeled number 1.

Density altitude for takeoff: Pressure altitude is 4,950 feet and the temperature is 97 degrees F. Enter the graph at 4,950 feet and move across to 97 degrees F. Density altitude is 8,200 feet. See dot on the chart that is labeled number 2.

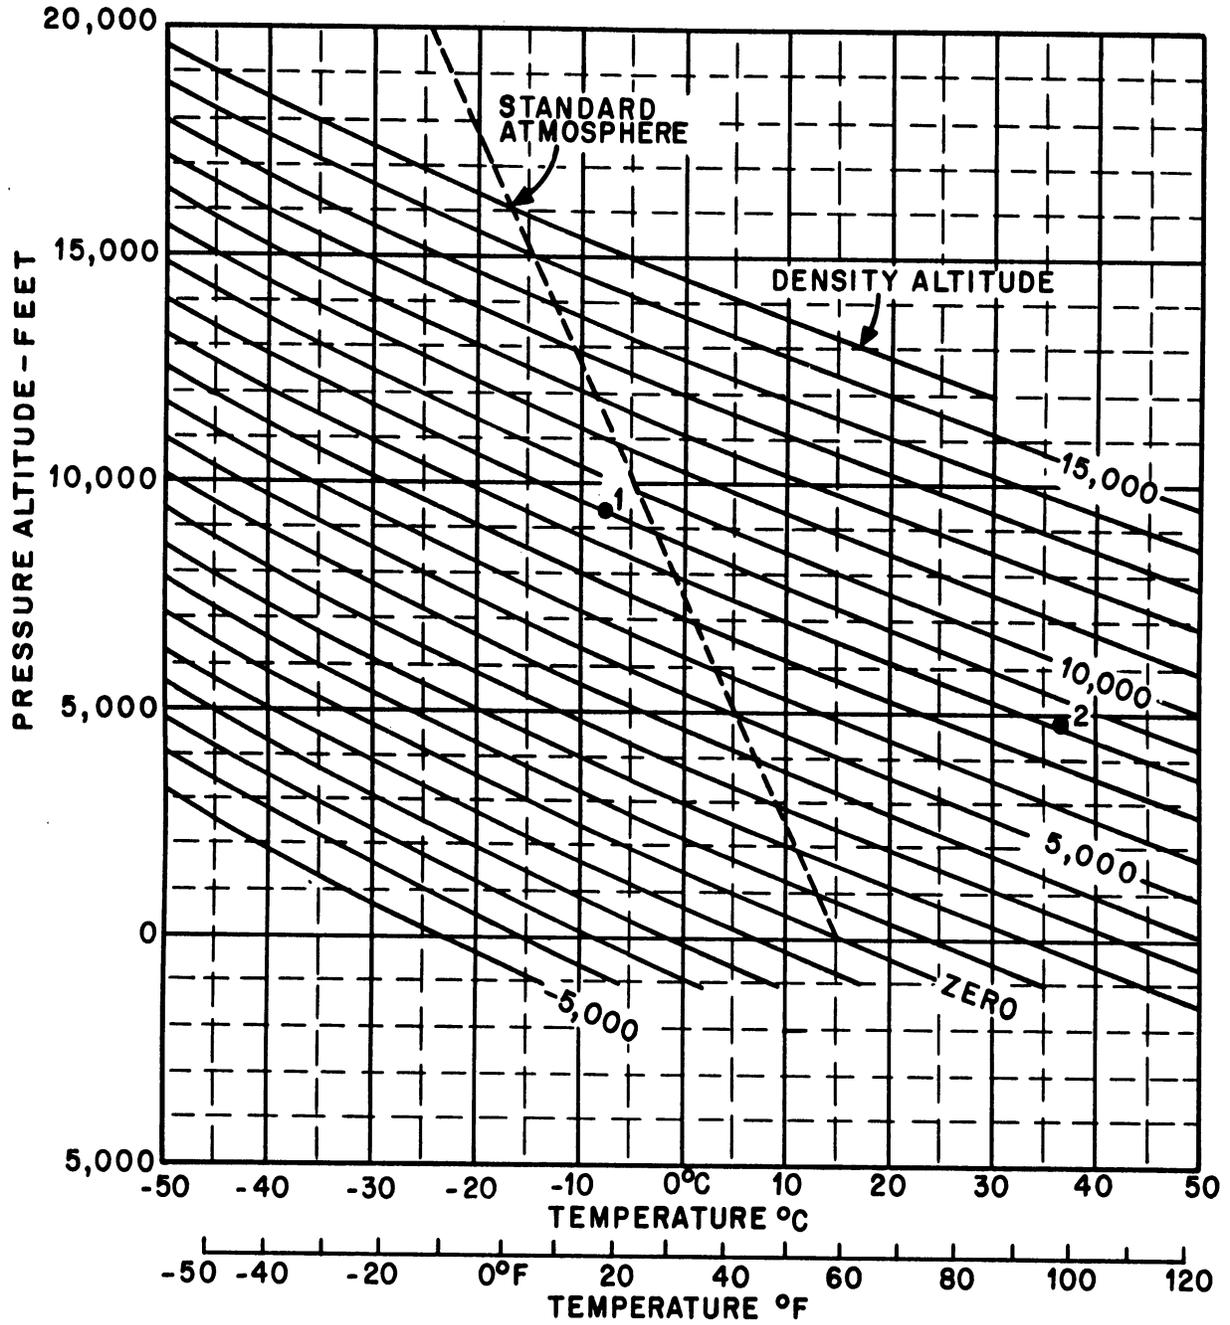


Figure 14-2. Density Altitude Computation Chart.

## CONTRACTIONS AND ACRONYMS

Contractions and acronyms are used extensively in surface reports, pilot reports, and forecasts.

### A

AAWU – Alaskan Aviation Weather Unit  
ABNDT - Abundant  
ABNML - Abnormal  
ABT - About  
ABV - Above  
AC - Convective outlook or altocumulus  
ACC - Altocumulus castellanus  
ACCUM - Accumulate  
ACFT - Aircraft  
ACLT - Accelerate  
ACLTD - Accelerated  
ACLTG - Accelerating  
ACLTS - Accelerates  
ACPY - Accompany  
ACRS - Across  
ACSL - Altocumulus standing lenticular  
ACTV - Active  
ACTVTY - Activity  
ACYC - Anticyclone  
ADJ - Adjacent  
ADL - Additional  
ADQT - Adequate  
ADQTLY - Adequately  
ADRNDCK - Adirondack  
ADVCT - Advect  
ADVCTD - Advected  
ADVCTG - Advecting  
ADVCTN - Advection  
ADVCTS - Advects  
ADVN - Advance  
ADVNG - Advancing  
ADVY - Advisory  
ADVYS - Advisories  
AFCT - Affect  
AFCTD - Affected  
AFCTG - Affecting  
AFDK - After dark  
AFOS - Automated Field Operations System  
AFSS - Automated Flight Service Station  
AFT - After  
AFTN - Afternoon  
AGL - Above ground level  
AGN - Again

AGR - Agreed  
AGRS - Agrees  
AGRMT - Agreement  
AHD - Ahead  
AK - Alaska  
AL - Alabama  
ALF - Aloft  
ALG - Along  
ALGHNY - Allegheny  
ALQDS - All quadrants  
ALSTG - Altimeter setting  
ALT - Altitude  
ALTA - Alberta  
ALTHO - Although  
ALTM - Altimeter  
ALUTN - Aleutian  
AMD - Amend  
AMDD - Amended  
AMDG - Amending  
AMDT - Amendment  
AMP - Amplify  
AMPG - Amplifying  
AMPLTD - Amplitude  
AMS - Air mass  
AMT - Amount  
ANLYS - Analysis  
ANS - Answer  
AOA - At or above  
AOB - At or below  
AP - Anomalous Propagation  
APCH - Approach  
APCHG - Approaching  
APCHS - Approaches  
APLCN - Appalachian  
APLCNS - Appalachians  
APPR - Appear  
APPRG - Appearing  
APPRS - Appears  
APRNT - Apparent  
APRNTLY - Apparently  
APRX - Approximate  
APRXLY - Approximately  
AR - Arkansas  
ARL – Air Resources Lab  
ARND - Around  
ARPT - Airport

ASAP - As soon as possible  
 ASSOCD - Associated  
 ASSOCN - Association  
 ATLC - Atlantic  
 ATTM - At this time  
 ATTN - Attention  
 AVBL - Available  
 AVG - Average  
 AVN - Aviation model  
 AWC - Aviation Weather Center  
 AWT - Awaiting  
 AZ - Arizona  
 AZM - Azimuth

BR - Branch  
 BRF - Brief  
 BRK - Break  
 BRKG - Breaking  
 BRKHIC - Breaks in higher clouds  
 BRKS - Breaks  
 BRKSHR - Berkshire  
 BRM - Barometer  
 BS - Blowing snow  
 BTWN - Between  
 BYD - Beyond

**C**

**B**

BACLIN - Baroclinic  
 BAJA - Baja, California  
 BATROP - Barotropic  
 BC - British Columbia  
 BCH - Beach  
 BCKG - Backing  
 BCM - Become  
 BCMG - Becoming  
 BCMS - Becomes  
 BDA - Bermuda  
 BDRY - Boundary  
 BFDK - Before dark  
 BFR - Before  
 BGN - Begin  
 BGNG - Beginning  
 BGNS - Begins  
 BHND - Behind  
 BINOVC - Breaks in overcast  
 BKN - Broken  
 BLD - Build  
 BLDG - Building  
 BLDUP - Buildup  
 BLKHLS - Black Hills  
 BLKT - Blanket  
 BLKTG - Blanketing  
 BLKTS - Blankets  
 BLO - Below clouds  
 BLW - Below  
 BLZD - Blizzard  
 BN - Blowing sand  
 BND - Bound  
 BNDRY - Boundary  
 BNDRYS - Boundaries  
 BNTH - Beneath  
 BOOTHEEL - Bootheel

C - Celsius  
 CA - California  
 CAA - Cold air advection  
 CARIB - Caribbean  
 CASCDS - Cascades  
 CB - Cumulonimbus  
 CC - Cirrocumulus  
 CCLDS - Clear of clouds  
 CCLKWS - Counterclockwise  
 CCSL - Cirrocumulus standing lenticular  
 CDFNT - Cold front  
 CFP - Cold front passage  
 CHC - Chance  
 CHCS - Chances  
 CHG - Change  
 CHGD - Changed  
 CHGG - Changing  
 CHGS - Changes  
 CHSPK - Chesapeake  
 CI - Cirrus  
 CIG - Ceiling  
 CIGS - Ceilings  
 CLD - Cloud  
 CLDNS - Cloudiness  
 CLDS - Clouds  
 CLKWS - Clockwise  
 CLR - Clear  
 CLRG - Clearing  
 CLRS - Clears  
 CMPLX - Complex  
 CNCL - Cancel  
 CNCLD - Canceled  
 CNCLG - Canceling  
 CNCLS - Cancels  
 CNDN - Canadian  
 CNTR - Center  
 CNTRD - Centered

CNTRL - Central  
 CNTY - County  
 CNTYS - Counties  
 CNVG - Converge  
 CNVGG - Converging  
 CNVGNC - Convergence  
 CNVTN - Convection  
 CNVTV - Convective  
 CNVTVLY - Convectively  
 CONFDC - Confidence  
 CO - Colorado  
 COMPR - Compare  
 COMPRG - Comparing  
 COMPRD - Compared  
 COMPRS - Compares  
 COND - Condition  
 CONT - Continue  
 CONTD - Continued  
 CONTLY - Continually  
 CONTG - Continuing  
 CONTRAILS - Condensation trails  
 CONTS - Continues  
 CONTDVD - Continental Divide  
 CONUS - Continental U.S.  
 COORD - Coordinate  
 COR - Correction  
 CPBL - Capable  
 CRC - Circle  
 CRLC - Circulate  
 CRLN - Circulation  
 CRNR - Corner  
 CRNRS - Corners  
 CRS - Course  
 CS - Cirrostratus  
 CSDR - Consider  
 CSDRBL - Considerable  
 CST - Coast  
 CSTL - Coastal  
 CT - Connecticut  
 CTGY - Category  
 CTSKLS - Catskills  
 CU - Cumulus  
 CUFRA - Cumulus fractus  
 CVR - Cover  
 CVRD - Covered  
 CVRG - Covering  
 CVRS - Covers  
 CWSU - Center Weather Service Units  
 CYC - Cyclonic  
 CYCLGN - Cyclogenesis

**D**

DABRK - Daybreak  
 DALGT - Daylight  
 DBL - Double  
 DC - District of Columbia  
 DCR - Decrease  
 DCRD - Decreased  
 DCRG - Decreasing  
 DCRGLY - Decreasingly  
 DCRS - Decreases  
 DE - Delaware  
 DEG - Degree  
 DEGS - Degrees  
 DELMARVA - Delaware-Maryland-Virginia  
 DFCLT - Difficult  
 DFCLTY - Difficulty  
 DFNT - Definite  
 DFNTLY - Definitely  
 DFRS - Differs  
 DFUS - Diffuse  
 DGNL - Diagonal  
 DGNLLY - Diagonally  
 DIGG - Digging  
 DIR - Direction  
 DISC - Discontinue  
 DISCD - Discontinued  
 DISCG - Discontinuing  
 DISRE - Disregard  
 DISRED - Disregarded  
 DISREG - Disregarding  
 DKTS - Dakotas  
 DLA - Delay  
 DLAD - Delayed  
 DLT - Delete  
 DLTD - Deleted  
 DLTG - Deleting  
 DLY - Daily  
 DMG - Damage  
 DMGD - Damaged  
 DMGG - Damaging  
 DMNT - Dominant  
 DMSH - Diminish  
 DMSHD - Diminished  
 DMSHG - Diminishing  
 DMSHS - Diminishes  
 DNS - Dense  
 DNSLP - Downslope  
 DNSTRM - Downstream  
 DNWND - Downwind  
 DP - Deep

DPND - Deepened  
 DPNG - Deepening  
 DPNS - Deepens  
 DPR - Deeper  
 DPTH - Depth  
 DRFT - Drift  
 DRFTD - Drifted  
 DRFTG - Drifting  
 DRFTS - Drifts  
 DRZL - Drizzle  
 DSCNT - Descent  
 DSIPT - Dissipate  
 DSIPTD - Dissipated  
 DSIPTG - Dissipating  
 DSIPTN - Dissipation  
 DSIPTS - Dissipates  
 DSND - Descend  
 DSNDG - Descending  
 DSNDS - Descends  
 DSNT - Distant  
 DSTBLZ - Destabilize  
 DSTBLZD - Destabilized  
 DSTBLZG - Destabilizing  
 DSTBLZS - Destabilizes  
 DSTBLZN - Destabilization  
 DSTC - Distance  
 DTRT - Deteriorate  
 DTRTD - Deteriorated  
 DTRTG - Deteriorating  
 DTRTS - Deteriorates  
 DURC - During climb  
 DURD - During descent  
 DURG - During  
 DURN - Duration  
 DVLP - Develop  
 DVLPD - Developed  
 DVLPG - Developing  
 DVLPMT - Development  
 DVLPS - Develops  
 DVRG - Diverge  
 DVRGG - Diverging  
 DVRGNC - Divergence  
 DVRGS - Diverges  
 DVV - Downward vertical velocity  
 DWNDFTS - Downdrafts  
 DWPNT - Dew point  
 DWPNTS - Dew points

**E**

E - East

EBND - Eastbound  
 EFCT - Effect  
 ELNGT - Elongate  
 ELNGTD - Elongated  
 ELSW - Elsewhere  
 EMBDD - Embedded  
 EMERG - Emergency  
 ENCTR - Encounter  
 ENDG - Ending  
 ENE - East-northeast  
 ENELY - East-northeasterly  
 ENERN - East-northeastern  
 ENEWD - East-northeastward  
 ENHNC - Enhance  
 ENHNCD - Enhanced  
 ENHNCG - Enhancing  
 ENHNCS - Enhances  
 ENHNCMNT - Enhancement  
 ENTR - Entire  
 ERN - Eastern  
 ERY - Early  
 ERYR - Earlier  
 ESE - East-southeast  
 ESELY - East-southeasterly  
 ESERN - East-southeastern  
 ESEWD - East-southeastward  
 ESNTL - Essential  
 ESTAB - Establish  
 EST - Estimate  
 ETA - Estimated time of arrival or ETA model  
 ETC - Et cetera  
 ETIM - Elapsed time  
 EVE - Evening  
 EWD - Eastward  
 EXCLV - Exclusive  
 EXCLVLY - Exclusively  
 EXCP - Except  
 EXPC - Expect  
 EXPCD - Expected  
 EXPCG - Expecting  
 EXTDD - Extend  
 EXTDD - Extended  
 EXTDDG - Extending  
 EXTDS - Extends  
 EXTN - Extension  
 EXTRAP - Extrapolate  
 EXTRAPD - Extrapolated  
 EXTRM - Extreme  
 EXTRMLY - Extremely  
 EXTSV - Extensive

**F**

F - Fahrenheit  
FA - Aviation area forecast  
FAM - Familiar  
FCST - Forecast  
FCSTD - Forecasted  
FCSTG - Forecasting  
FCSTR - Forecaster  
FCSTS - Forecasts  
FIG - Figure  
FILG - Filling  
FIR – Flight information region  
FIRAV - First available  
FL - Florida or flight level  
FLG - Falling  
FLRY - Flurry  
FLRYS - Flurries  
FLT - Flight  
FLW - Follow  
FLWG - Following  
FM - From  
FMT - Format  
FNCTN - Function  
FNT - Front  
FNTL - Frontal  
FNTS - Fronts  
FNTGNS - Frontogenesis  
FNTLYS - Frontolysis  
FORNN - Forenoon  
FPM - Feet per minute  
FQT - Frequent  
FQTLY - Frequently  
FRM - Form  
FRMG - Forming  
FRMN - Formation  
FROPA - Frontal passage  
FROFCA - Frontal surface  
FRST - Frost  
FRWF - Forecast wind factor  
FRZ - Freeze  
FRZLVL - Freezing level  
FRZN - Frozen  
FRZG - Freezing  
FT - Feet  
FTHR - Further  
FVRBL - Favorable  
FWD - Forward  
FYI - For your information

**G**

G - Gust  
GA - Georgia  
GEN - General  
GENLY - Generally  
GEO - Geographic  
GEOREF - Geographical reference  
GF - Fog  
GICG - Glaze icing  
GLFALSK - Gulf of Alaska  
GLFCAL - Gulf of California  
GLFMEX - Gulf of Mexico  
GLFSTLAWR - Gulf of St. Lawrence  
GND - Ground  
GRAD - Gradient  
GRDL - Gradual  
GRDLY - Gradually  
GRT - Great  
GRTLY - Greatly  
GRTLKS - Great Lakes  
GSTS - Gusts  
GSTY - Gusty  
GTS – Global Telecommunication System

**H**

HAZ - Hazard  
HDFRZ - Hard freeze  
HDSVLY - Hudson Valley  
HDWND - Head wind  
HGT - Height  
HI - High  
HI - Hawaii  
HIER - Higher  
HIFOR - High level forecast  
HLF - Half  
HLTP - Hilltop  
HLSTO - Hailstones  
HND - Hundred  
HPC – Hydrometeorological Prediction Center  
HR - Hour  
HRS - Hours  
HRZN - Horizon  
HTG - Heating  
HURCN - Hurricane  
HUREP - Hurricane report  
HV - Have  
HVY - Heavy  
HVYR - Heavier  
HVYST - Heaviest  
HWVR - However

HWY - Highway

**I**

IA - Iowa

IC - Ice (in PIREPs only)

ICAO - International Civil Aviation Organization

ICG - Icing

ICGIC - Icing in clouds

ICGICIP - Icing in clouds and in precipitation

ICGIP - Icing in precipitation

ID - Idaho

IFR - Instrument flight rules

IL - Illinois

IMDT - Immediate

IMDTLY - Immediately

IMPL - Impulse

IMPLS - Impulses

IMPT - Important

INCL - Include

INCLD - Included

INCLG - Including

INCLS - Includes

INCR - Increase

INCRD - Increased

INCRG - Increasing

INCRGLY - Increasingly

INCRS - Increases

INDC - Indicate

INDCD - Indicated

INDCG - Indicating

INDCS - Indicates

INDEF - Indefinite

INFO - Information

INLD - Inland

INSTBY - Instability

INTCNTL - Intercontinental

INTL - International

INTMD - Intermediate

INTMT - Intermittent

INTMTLY - Intermittently

INTR - Interior

INTRMTRGN - Intermountain region

INTS - Intense

INTSFCN - Intensification

INTSFY - Intensify

INTSFYD - Intensified

INTSFYG - Intensifying

INTSFYS - Intensifies

INTSTY - Intensity

INTVL - Interval

INVRN - Inversion

IOVC - In overcast

INVOF - In vicinity of

IP - Ice pellets

IPV - Improve

IPVG - Improving

ISOL - Isolate

ISOLD - Isolated

**J**

JCTN - Junction

JTSTR - Jet stream

**K**

KFRST - Killing frost

KLYR - Smoke layer aloft

KOCTY - Smoke over city

KS - Kansas

KT - Knots

KY - Kentucky

**L**

LA - Louisiana

LABRDR - Labrador

LAT - Latitude

LAWRS - Limited aviation weather reporting station

LCL - Local

LCLY - Locally

LCTD - Located

LCTN - Location

LCTMP - Little change in temperature

LEVEL - Level

LFTG - Lifting

LGRNG - Long-range

LGT - Light

LGTR - Lighter

LGWV - Long wave

LI - Lifted Index

LIS - Lifted Indices

LK - Lake

LKS - Lakes

LKLY - Likely

LLJ - Low level jet

LLWAS - Low-level wind shear alert system

LLWS - Low-level wind shear

LMTD - Limited

LMTG - Limiting  
LMTS - Limits  
LN - Line  
LO - Low  
LONG - Longitude  
LONGL - Longitudinal  
LRG - Large  
LRGLY - Largely  
LRGR - Larger  
LRGST - Largest  
LST - Local standard time  
LTD - Limited  
LTG - Lightning  
LTGCC - Lightning cloud-to-cloud  
LTGCG - Lightning cloud-to-ground  
LTGCCCCG - Lightning cloud-to-cloud cloud-to-ground  
LTGCW - Lightning cloud-to-water  
LTGIC - Lightning in cloud  
LTL - Little  
LTLCG - Little change  
LTR - Later  
LTST - Latest  
LV - Leaving  
LVL - Level  
LVLS - Levels  
LWR - Lower  
LWRD - Lowered  
LWRG - Lowering  
LYR - Layer  
LYRD - Layered  
LYRS - Layers

**M**

MA - Massachusetts  
MAN - Manitoba  
MAX - Maximum  
MB - Millibars  
MCD - Mesoscale discussion  
MD - Maryland  
MDFY - Modify  
MDFYD - Modified  
MDFYG - Modifying  
MDL - Model  
MDLS - Models  
MDT - Moderate  
MDTLY - Moderately  
ME - Maine  
MED - Medium  
MEGG - Merging

MESO - Mesoscale  
MET - Meteorological  
METAR - Aviation routine weather report  
METRO - Metropolitan  
MEX - Mexico  
MHKVLV - Mohawk Valley  
MI - Michigan  
MID - Middle  
MIDN - Midnight  
MIL - Military  
MIN - Minimum  
MISG - Missing  
MLTLVL - Melting level  
MN - Minnesota  
MNLD - Mainland  
MNLY - Mainly  
MO - Missouri  
MOGR - Moderate or greater  
MOV - Move  
MOVD - Moved  
MOVG - Moving  
MOVMT - Movement  
MOVS - Moves  
MPH - Miles per hour  
MRGL - Marginal  
MRGLLY - Marginally  
MRNG - Morning  
MRTM - Maritime  
MS - Mississippi  
MSG - Message  
MSL - Mean sea level  
MST - Most  
MSTLY - Mostly  
MSTR - Moisture  
MT - Montana  
MTN - Mountain  
MTNS - Mountains  
MULT - Multiple  
MULTILVL - Multilevel  
MWO - Meteorological Watch Office  
MXD - Mixed

**N**

N - North  
NAB - Not above  
NAT - North Atlantic  
NATL - National  
NAV - Navigation  
NB - New Brunswick

NBND - Northbound  
 NBRHD - Neighborhood  
 NC - North Carolina  
 NCEP - National Center of Environmental  
     Prediction  
 NCO – NCEP Central Operations  
 NCWX - No change in weather  
 ND - North Dakota  
 NE - Northeast  
 NEB - Nebraska  
 NEC - Necessary  
 NEG - Negative  
 NEGLY - Negatively  
 NELY - Northeasterly  
 NERN - Northeastern  
 NEWD - Northeastward  
 NEW ENG - New England  
 NFLD - Newfoundland  
 NGM - Nested grid model  
 NGT - Night  
 NH - New Hampshire  
 NIL - None  
 NJ - New Jersey  
 NL - No layers  
 NLT - Not later than  
 NLY - Northerly  
 NM - New Mexico  
 NMBR - Number  
 NMBRS - Numbers  
 NML - Normal  
 NMRS - Numerous  
 NNE - North-northeast  
 NNELY - North-northeasterly  
 NNERN - North-northeastern  
 NNEWD - North-northeastward  
 NNW - North-northwest  
 NNWLY - North-northwesterly  
 NNWRN - North-northwestern  
 NNWWD - North-northwestward  
 NNNN - End of message  
 NOAA - National Oceanic and Atmospheric  
     Administration  
 NOPAC - Northern Pacific  
 NPRS - Nonpersistent  
 NR - Near  
 NRLY - Nearly  
 NRN - Northern  
 NRW - Narrow  
 NS - Nova Scotia  
 NTFY - Notify  
 NTFYD - Notified

NV - Nevada  
 NVA - Negative vorticity advection  
 NW - Northwest  
 NWD - Northward  
 NWLY - Northwesterly  
 NWRN - Northwestern  
 NWS - National Weather Service  
 NY - New York  
 NXT - Next

## O

OAT - Outside air temperature  
 OBND - Outbound  
 OBS - Observation  
 OBSC - Obscure  
 OBSCD - Obscured  
 OBSCG - Obscuring  
 OCFNT - Occluded front  
 OCLD - Occlude  
 OCLDS - Occludes  
 OCLDD - Occluded  
 OCLDG - Occluding  
 OCLN - Occlusion  
 OCNL - Occasional  
 OCNLY - Occasionally  
 OCR - Occur  
 OCRD - Occurred  
 OCRG - Occurring  
 OCRS - Occurs  
 OFC - Office  
 OFP - Occluded frontal passage  
 OFSHR - Offshore  
 OH - Ohio  
 OK - Oklahoma  
 OMTNS - Over mountains  
 ONSHR - On shore  
 OR - Oregon  
 ORGPHC - Orographic  
 ORIG - Original  
 OSV - Ocean station vessel  
 OTLK - Outlook  
 OTP - On top  
 OTR - Other  
 OTRW - Otherwise  
 OUTFLO - Outflow  
 OVC - Overcast  
 OVHD - Overhead  
 OVNGT - Overnight  
 OVR - Over  
 OVRN - Overrun

OVRNG - Overrunning  
OVTK - Overtake  
OVTKG - Overtaking  
OVTKS - Overtakes

**P**

PA - Pennsylvania  
PAC - Pacific  
PATWAS - Pilot's automatic telephone weather  
answering service  
PBL - Planetary boundary layer  
PCPN - Precipitation  
PD - Period  
PDMT - Predominant  
PEN - Peninsula  
PERM - Permanent  
PGTSND - Puget Sound  
PHYS - Physical  
PIBAL - Pilot balloon observation  
PIREP - Pilot weather report  
PL - Ice pellets  
PLNS - Plains  
PLS - Please  
PLTO - Plateau  
PM - Postmeridian  
PNHDL - Panhandle  
POS - Positive  
POSLY - Positively  
PPINA - Radar weather report not available  
PPINE - Radar weather report no echoes  
observed  
PPSN - Present position  
PRBL - Probable  
PRBLY - Probably  
PRBLTY - Probability  
PRECD - Precede  
PRECDD - Preceded  
PRECDG - Preceding  
PRECDS - Precedes  
PRES - Pressure  
PRESFR - Pressure falling rapidly  
PRESRR - Pressure rising rapidly  
PRIM - Primary  
PRIN - Principal  
PRIND - Present indications are  
PRJMP - Pressure jump  
PROB - Probability  
PROC - Procedure  
PROD - Produce  
PRODG - Producing

PROG - Forecast  
PROGD - Forecasted  
PROGS - Forecasts  
PRSNT - Present  
PRSNTLY - Presently  
PRST - Persist  
PRSTS - Persists  
PRSTNC - Persistence  
PRSTNT - Persistent  
PRVD - Provide  
PRVDD - Provided  
PRVDG - Providing  
PRVDS - Provides  
PS - Plus  
PSBL - Possible  
PSBLY - Possibly  
PSBLTY - Possibility  
PSG - Passage  
PSN - Position  
PSND - Positioned  
PTCHY - Patchy  
PTLY - Partly  
PTNL - Potential  
PTNLY - Potentially  
PTNS - Portions  
PUGET - Puget Sound  
PVA - Positive vorticity advection  
PVL - Prevail  
PVLG - Prevailed  
PVLG - Prevailing  
PVLS - Prevails  
PVLT - Prevalent  
PWB - Pilot weather briefing  
PWR - Power

**Q**

QN - Question  
QSTNRY - Quasistationary  
QTR - Quarter  
QUAD - Quadrant  
QUE - Quebec

**R**

R - Rain  
RADAT - Radiosonde additional data  
RAOB - Radiosonde observation  
RCH - Reach

RCHD - Reached  
 RCHG - Reaching  
 RCHS - Reaches  
 RCKY - Rocky  
 RCKYS - Rockies  
 RCMD - Recommend  
 RCMDD - Recommended  
 RCMDG - Recommending  
 RCMDS - Recommends  
 RCRD - Record  
 RCRDS - Records  
 RCV - Receive  
 RCVD - Received  
 RCVG - Receiving  
 RCVS - Receives  
 RDC - Reduce  
 RDGG - Ridging  
 RDVLP - Redevelop  
 RDVLPG - Redeveloping  
 RDVLPMT - Redevelopment  
 RE - Regard  
 RECON - Reconnaissance  
 REF - Reference  
 RES - Reserve  
 REPL - Replace  
 REPLD - Replaced  
 REPLG - Replacing  
 REPLS - Replaces  
 REQ - Request  
 REQS - Requests  
 REQSTD - Requested  
 RESP - Response  
 RESTR - Restrict  
 RGD - Ragged  
 RGL - Regional model  
 RGLR - Regular  
 RGN - Region  
 RGNS - Regions  
 RGT - Right  
 RH - Relative humidity  
 RI - Rhode Island  
 RIOGD - Rio Grande  
 RLBL - Reliable  
 RLTV - Relative  
 RLTVLY - Relatively  
 RMK - Remark  
 RMN - Remain  
 RMND - Remained  
 RMNDR - Remainder  
 RMNG - Remaining  
 RMNS - Remains

RNFL - Rainfall  
 ROT - Rotate  
 ROTD - Rotated  
 ROTG - Rotating  
 ROTS - Rotates  
 RPD - Rapid  
 RPDLY - Rapidly  
 RPLC - Replace  
 RPLCD - Replaced  
 RPLCG - Replacing  
 RPLCS - Replaces  
 RPRT - Report  
 RPRTD - Reported  
 RPRTG - Reporting  
 RPRTS - Reports  
 RPT - Repeat  
 RPTG - Repeating  
 RPTS - Repeats  
 RQR - Require  
 RQRD - Required  
 RQRG - Requiring  
 RQRS - Requires  
 RSG - Rising  
 RSN - Reason  
 RSNG - Reasoning  
 RSNS - Reasons  
 RSTR - Restrict  
 RSTRD - Restricted  
 RSTRG - Restricting  
 RSTRS - Restricts  
 RTRN - Return  
 RTRND - Returned  
 RTRNG - Returning  
 RTRNS - Returns  
 RUF - Rough  
 RUFLY - Roughly  
 RVS - Revise  
 RVSD - Revised  
 RVSG - Revising  
 RVSS - Revises  
 RWY - Runway

## S

S - South  
 SAB – Satellite Analysis Branch  
 SASK - Saskatchewan  
 SATFY - Satisfactory  
 SBND - Southbound  
 SBSB - Subside

SBSDD - Subsided  
SBSDNC - Subsidence  
SBSDS - Subsides  
SC - South Carolina or stratocumulus  
SCND - Second  
SCNDRY - Secondary  
SCSL -Stratocumulus standing lenticular  
SCT - Scatter  
SCTD - Scattered  
SCTR - Sector  
SD - South Dakota  
SE - Southeast  
SEC - Second  
SELY - Southeasterly  
SEPN - Separation  
SEQ - Sequence  
SERN - Southeastern  
SEV - Severe  
SEWD -Southeastward  
SFC - Surface  
SG - Snow grains  
SGFNT - Significant  
SGFNTLY - Significantly  
SHFT - Shift  
SHFTD - Shifted  
SHFTG - Shifting  
SHFTS - Shifts  
SHLD - Shield  
SHLW - Shallow  
SHRT - Short  
SHRTLY - Shortly  
SHRTWV - Shortwave  
SHUD - Should  
SHWR - Shower  
SIERNEV - Sierra Nevada  
SIG - Signature  
SIGMET - Significant meteorological  
information  
SIMUL - Simultaneous  
SKC - Sky clear  
SKED - Schedule  
SLD - Solid  
SLGT - Slight  
SLGTLY - Slightly  
SLO - Slow  
SLOLY - Slowly  
SLOR - Slower  
SLP - Slope  
SLPG - Sloping  
SLW - Slow  
SLY - Southerly

SM - Statute mile  
SML - Small  
SMLR - Smaller  
SMRY - Summary  
SMTH - Smooth  
SMTHR - Smoother  
SMTHST - Smoothest  
SMTM - Sometime  
SMWHT - Somewhat  
SN - Snow  
SNBNK - Snowbank  
SNFLK - Snowflake  
SNGL - Single  
SNOINCR - Snow increase  
SNOINCRG - Snow increasing  
SNST - Sunset  
SOP - Standard operating procedure  
SPC – Storm Prediction Center  
SPCLY - Especially  
SPD - Speed  
SPKL - Sprinkle  
SPLNS - Southern Plains  
SPRD - Spread  
SPRDG - Spreading  
SPRDS - Spreads  
SPRL - Spiral  
SQ - Squall  
SQLN - Squall line  
SR - Sunrise  
SRN - Southern  
SRND - Surround  
SRNDD - Surrounded  
SRNDG - Surrounding  
SRNDS - Surrounds  
SS - Sunset  
SSE - South-southeast  
SSELY - South-southeasterly  
SSERN - South-southeastern  
SSEWD - South-southeastward  
SSW - South-southwest  
SSWLY - South-southwesterly  
SSWRN - South-southwestern  
SSWWD - South-southwestward  
ST - Stratus  
STAGN - Stagnation  
STBL - Stable  
STBLTY - Stability  
STD - Standard  
STDY - Steady  
STFR - Stratus fractus  
STFRM - Stratiform

STG - Strong  
 STGLY - Strongly  
 STGR - Stronger  
 STGST - Strongest  
 STM - Storm  
 STMS - Storms  
 STN - Station  
 STNRY - Stationary  
 SUB - Substitute  
 SUBTRPCL - Subtropical  
 SUF - Sufficient  
 SUFLY - Sufficiently  
 SUG - Suggest  
 SUGG - Suggesting  
 SUGS - Suggests  
 SUP - Supply  
 SUPG - Supplying  
 SUPR - Superior  
 SUPSD - Supersede  
 SUPSDG - Superseding  
 SUPSDS - Supersedes  
 SVG - Serving  
 SVRL - Several  
 SW - Southwest  
 SWD - Southward  
 SWWD - Southwestward  
 SWLY - Southwesterly  
 SWRN - Southwestern  
 SX - Stability index  
 SXN - Section  
 SYNOP - Synoptic  
 SYNS - Synopsis  
 SYS - System

**T**

TAF - Aviation terminal forecast  
 TCNTL - Transcontinental  
 TCU - Towering cumulus  
 TDA - Today  
 TEMP - Temperature  
 THK - Thick  
 THKNG - Thickening  
 THKNS - Thickness  
 THKR - Thicker  
 THKST - Thickest  
 THN - Thin  
 THNG - Thinning  
 THNR - Thinner  
 THNST - Thinnest  
 THR - Threshold

THRFTR - Thereafter  
 THRU - Through  
 THRUT - Throughout  
 THSD - Thousand  
 THTN - Threaten  
 THTND - Threatened  
 THTNG - Threatening  
 THTNS - Threatens  
 TIL - Until  
 TMPRY - Temporary  
 TMPRYLY - Temporarily  
 TMW - Tomorrow  
 TN - Tennessee  
 TNDCY - Tendency  
 TNDCYS - Tendencies  
 TNGT - Tonight  
 TNTV - Tentative  
 TNTVLY - Tentatively  
 TOPS - Tops  
 TOVC - Top of overcast  
 TPG - Topping  
 TRBL - Trouble  
 TRIB - Tributary  
 TRKG - Tracking  
 TRML - Terminal  
 TRMT - Terminate  
 TRMTD - Terminated  
 TRMTG - Terminating  
 TRMTS - Terminates  
 TRNSP - Transport  
 TRNSPG - Transporting  
 TROF - Trough  
 TROFS - Troughs  
 TROP - Tropopause  
 TRPCD - Tropical continental air mass  
 TRPCL - Tropical  
 TRRN - Terrain  
 TRSN - Transition  
 TS - Thunderstorm  
 TSFR - Transfer  
 TSFRD - Transferred  
 TSFRG - Transferring  
 TSFRS - Transfers  
 TSNT - Transient  
 TURBC - Turbulence  
 TURBT - Turbulent  
 TWD - Toward  
 TWDS - Towards  
 TWI - Twilight  
 TWRG - Towering  
 TX - Texas

**U**

UA - Pilot weather reports  
UDDF - Up- and downdrafts  
UN - Unable  
UNAVBL - Unavailable  
UNEC - Unnecessary  
UNKN - Unknown  
UNL - Unlimited  
UNRELBL - Unreliable  
UNRSTD - Unrestricted  
UNSATFY - Unsatisfactory  
UNSBL - Unseasonable  
UNSTBL - Unstable  
UNSTDY - Unsteady  
UNSTL - Unsettle  
UNSTLD - Unsettled  
UNUSBL - Unusable  
UPDFTS - Updrafts  
UPR - Upper  
UPSLP - Upslope  
UPSTRM - Upstream  
URG - Urgent  
USBL - Usable  
UT - Utah  
UTC – Universal Time Coordinate  
UVV - Upward vertical velocity  
UWNDS - Upper winds

**V**

VA - Virginia  
VAAC – Volcanic Ash Advisory Center  
VAAS – Volcanic Ash Advisory Statement  
VAL - Valley  
VARN - Variation  
VCNTY - Vicinity  
VCOT - VFR conditions on top  
VCTR - Vector  
VFR - Visual flight rules  
VFY - Verify  
VFYD - Verified  
VFYG - Verifying  
VFYS - Verifies  
VLCTY - Velocity  
VLCTYS - Velocities  
VLNT - Violent  
VLNTLY - Violently

VMC - Visual meteorological conditions  
VOL - Volume  
VORT - Vorticity  
VR - Veer  
VRG - Veering  
VRBL - Variable  
VRISL - Vancouver Island, BC  
VRS - Veers  
VRT MOTN - Vertical motion  
VRY - Very  
VSB - Visible  
VSBY - Visibility  
VSBYDR - Visibility decreasing rapidly  
VSBYIR - Visibility increasing rapidly  
VT - Vermont  
VV - Vertical velocity

**W**

W - West  
WA - Washington  
WAA - Warm air advection  
WAFS – Word Area Forecast System  
WBND - Westbound  
WDLY - Widely  
WDSPRD - Widespread  
WEA - Weather  
WFO - Weather Forecast Office  
WFSO - Weather Forecast Service Office  
WFP - Warm front passage  
WI - Wisconsin  
WIBIS - Will be issued  
WINT - Winter  
WK - Weak  
WKDAY - Weekday  
WKEND - Weekend  
WKNG - Weakening  
WKNS - Weakens  
WKR - Weaker  
WKST - Weakest  
WKN - Weaken  
WL - Will  
WLY - Westerly  
WND - Wind  
WNDS - Winds  
WNW - West-northwest  
WNWLY - West-northwesterly  
WNWRN - West-northwestern  
WNWWD - West-northwestward  
WO - Without  
WPLTO - Western Plateau

WRM - Warm  
 WRMG - Warming  
 WRN - Western  
 WRMR - Warmer  
 WRMST - Warmest  
 WRMFNT - Warm front  
 WRMFNTL - Warm frontal  
 WRNG - Warning  
 WRS - Worse  
 WS - Wind shear  
 WSHFT - Windshift  
 WSFO - Weather Service Forecast Office  
 WSTCH - Wasatch Range  
 WSW - West-southwest  
 WSWLY - West-southwesterly  
 WSWRN - West-southwestern  
 WSWWD - West-southwestward  
 WTR - Water  
 WTSPT - Waterspout  
 WUD - Would  
 WV - West Virginia  
 WVS - Waves  
 WW - Severe weather watch  
 WWD - Westward  
 WX - Weather  
 WY - Wyoming

**X**

XCP - Except

XPC - Expect  
 XPCD - Expected  
 XPCG - Expecting  
 XPCS - Expects  
 XPLOS - Explosive  
 XTND - Extend  
 XTND - Extended  
 XTNDG - Extending  
 XTRM - Extreme  
 XTRMLY - Extremely

**Y**

YDA - Yesterday  
 YKN - Yukon  
 YLSTN - Yellowstone

**Z**

ZN - Zone  
 ZNS - Zones

**SCHEDULED ISSUANCE AND VALID TIMES OF FORECAST PRODUCTS**

Table 14-1 shows scheduled issuance and valid times of the TAFs. All times are UTC.

**Table 14-1 Scheduled Issuance and Valid Times of TAFs**

<b>Scheduled Issuance Times</b>	<b>Valid Period</b>	<b>Transmission Period</b>
<b>00</b>	<b>00-00</b>	<b>2320-2340</b>
<b>06</b>	<b>06-06</b>	<b>0520-0540</b>
<b>12</b>	<b>12-12</b>	<b>1120-1140</b>
<b>18</b>	<b>18-18</b>	<b>1720-1740</b>

The Table 14-2 has scheduled issuance and valid times of the TWEBs. All times are UTC.

**Table 14-2 Scheduled Issuance and Valid Times of TWEBs**

<b>Scheduled Issuance Times</b>	<b>Valid Period</b>	<b>Transmission Period</b>
<b>02</b>	<b>02-14</b>	<b>0130-0140</b>
<b>08</b>	<b>08-20</b>	<b>0730-0740</b>
<b>14</b>	<b>14-02</b>	<b>1330-1340</b>
<b>20</b>	<b>20-08</b>	<b>1930-1940</b>

Table 14-3 shows the scheduled issuance times of the FAs for their respective areas. The FA is valid 1 hour after issuance time. All times are UTC. The times the FA is issued depends on whether the FA area is in local standard or local daylight time.

**Table 14-3 Scheduled Issuance Times of FAs**

<b>Area Forecast (FA)</b>	<b>Boston and Miami (LDT/LST)</b>	<b>Chicago and Ft. Worth (LDT/LST)</b>	<b>San Francisco and Salt Lake City (LDT/LST)</b>	<b>Alaska (LDT/LST)</b>	<b>Hawaii</b>
<b>1<sup>st</sup> issuance</b>	<b>0845/0945</b>	<b>0945/1045</b>	<b>1045/1145</b>	<b>0145/0245</b>	<b>0345</b>
<b>2<sup>nd</sup> issuance</b>	<b>1745/1845</b>	<b>1845/1945</b>	<b>1945/2045</b>	<b>0745/0845</b>	<b>0945</b>
<b>3<sup>rd</sup> issuance</b>	<b>0045/0145</b>	<b>0145/0245</b>	<b>0245/0345</b>	<b>1345/1445</b>	<b>1545</b>
<b>4<sup>th</sup> issuance</b>				<b>1945/2045</b>	<b>2145</b>

Table 14-4 shows the scheduled issuance times of the Gulf of Mexico FA. All times are UTC.

**Table 14-4 Scheduled Issuance Times of the Gulf of Mexico FA**

<b>Gulf of Mexico FA</b>	<b>Issuance Times (LDT/LST)</b>
<b>1<sup>st</sup> issuance</b>	<b>1040/1140</b>
<b>2<sup>nd</sup> issuance</b>	<b>1740/1840</b>

**NATIONAL WEATHER SERVICE STATION IDENTIFIERS****NORTHEAST REGION**

AKQ - Norfolk/Wakefield, VA  
 ALY - Albany/East Berne, NY  
 BGM - Binghamton, NY  
 BOX - Boston/Taunton, MA  
 BTV - Burlington, VT  
 BUF - Buffalo, NY  
 CLE - Cleveland, OH  
 CTP - State College, PA  
 GYX - Portland/Gray, ME  
 ILN - Cincinnati/Wilmington, OH  
 LWX - Washington, DC/Sterling, VA  
 OKX - New York City/Brookhaven, NY  
 PBZ - Pittsburgh/Coraopolis, PA  
 PHI - Philadelphia, PA/Mount Holly, NJ  
 RLX - Charleston/Ruthdale, WV  
 RNK - Roanoke/Blacksburg, VA

**SOUTHCENTRAL REGION**

AMA - Amarillo, TX  
 BMX - Birmingham, AL  
 BRO - Brownsville, TX  
 CRP - Corpus Christi, TX  
 EPZ - El Paso, TX/Santa Theresa, NM  
 EWX - Austin/San Antonio, TX  
 FWD - Dallas/Forth Worth, TX  
 HGX - Houston/Dickinson, TX  
 JAN - Jackson, MS  
 LCH - Lake Charles, LA  
 LIX - New Orleans/Slidell, LA  
 LUB - Lubbock, TX  
 LZK - North Little Rock, AR  
 MAF - Midland, TX  
 MEG - Memphis/Germantown, TN  
 MOB - Mobile, MS  
 MRX - Knoxville/Tri Cities, TN  
 OHX - Nashville/Old Hickory, TN  
 OUN - Oklahoma City/Norman, OK  
 SHV - Shreveport, LA  
 SJT - San Angelo, TX  
 TSA - Tulsa, OK

**SOUTHEAST REGION**

CAE - Columbia, SC  
 CHS - Charleston, SC  
 FFC - Atlanta/Peachtree City, GA  
 GSP - Greenville-Spartanburg/Greer, SC  
 ILM - Wilmington, NC  
 JAX - Jacksonville, FL  
 MFL - Miami, FL  
 MHX - Morehead City/Newport, NC  
 MLB - Melbourne, FL  
 RAH - Raleigh/Durham, NC  
 TAE - Tallahassee, FL  
 TBW - Tampa/Ruskin, FL  
 TJSJ - San Juan, PR

**MOUNTAIN REGION**

ABQ - Albuquerque, NM  
 BIL - Billings, MT  
 BOI - Boise, ID  
 BOU - Denver/Boulder, CO  
 CYS - Cheyenne, WY  
 FGZ - Flagstaff/Bellefont, AZ  
 GGW - Glasgow, MT  
 GJT - Grand Junction, CO  
 LKN - Elko, NV  
 MSO - Missoula, MT  
 PIH - Pocatello, ID  
 PSR - Phoenix, AZ  
 PUB - Pueblo, CO  
 REV - Reno, NV  
 RIW - Riverton, WY  
 SLC - Salt Lake City, UT  
 TFX - Great Falls, MT  
 TWC - Tucson, AZ  
 VEF - Las Vegas, NV

**NORTHCENTRAL REGION**

ABR - Aberdeen, SD  
 APX - Alpena/Gaylord, MI  
 ARX - La Crosse, WI  
 BIS - Bismarck, ND  
 DDC - Dodge City, KS  
 DLH - Duluth, MN  
 DMX - Des Moines/Johnston, IA  
 DTX - Detroit/Pontiac, MI  
 DVN - Quad Cities/Davenport, IA

December 1999

FGF - Fargo/Grand Forks, ND  
EAX - Kansas City/Pleasant Hill, MO  
FSD - Sioux Falls, SD  
GID - Hastings, NE  
GLD - Goodland, KS  
GRB - Green Bay, WI  
GRR - Grand Rapids, MI  
ICT - Wichita, KS  
ILX - Lincoln, IL  
IND - Indianapolis, IN  
JKL - Jackson/Noctor, KY  
LBF - North Platte, NE  
LMK - Louisville, KY  
LOT - Chicago/Romeoville, IL  
LSX - St Louis, MO  
MPX - Minneapolis/Chanhassen, MN  
MKX - Milwaukee/Dousman, WI  
MQT - Marquette, MI  
OAX - Omaha/Valley, NE  
PAH - Paducah, KY  
SGF - Springfield, MO  
TOP - Topeka, KS  
UNR - Rapid City, SD

PHFO - Honolulu, HI

#### **WEST COAST REGION**

EKA - Eureka, CA  
HNX - Hanford, CA  
LOX - Los Angeles/Oxnard, CA  
MFR - Medford, OR  
MTR - San Francisco/Monterey, CA  
OTX - Spokane, WA  
PDT - Pendleton, OR  
PQR - Portland, OR  
SEW - Seattle, WA  
SGX - San Diego, CA  
STO - Sacramento, CA

#### **ALASKAN REGION**

PAFC - Anchorage, AK  
PAFG - Fairbanks, AK  
PAJK - Juneau, AK

#### **PACIFIC REGION**

PGUA - Tiyan, GU

**WSR-88D SITES**

ABC Bethel, AK  
 ABR Aberdeen, SD  
 ABX Albuquerque, NM  
 ACG Sitka/Biorka Island, AK  
 AEC Nome, AK  
 AHG Anchorage/Nikiski, AK  
 AIH Middleton Island, AK  
 AKC King Salmon, AK  
 AKQ Norfolk/Wakefield, VA  
 AMA Amarillo, TX  
 AMX Miami, FL  
 APD Fairbanks, AK  
 APX Gaylord, MI  
 ARX La Crosse, WI  
 ATX Seattle-Tacoma/Camano Island, WA  
 BBX Marysville/Beale AFB, CA  
 BGM Binghamton, NY  
 BHX Eureka/Bunker Hill, CA  
 BIS Bismarck, ND  
 BIX Keesler AFB, MS  
 BLX Billings/Yellowstone County, MT  
 BMX Birmingham/Alabaster, AL  
 BOX Boston/Taunton, MA  
 BRO Brownsville, TX  
 BUF Buffalo/Cheektowaga, NY  
 BYX Key West/Boca Chica Key, FL  
 CAE Columbia, SC  
 CBW Caribou/Hodgdon, ME  
 CBX Boise/Ada County, ID  
 CCX State College/Rush, PA  
 CLE Cleveland, OH  
 CLX Charleston/Grays, SC  
 CRP Corpus Christi, TX  
 CXX Burlington/Colchester, VT  
 CYS Cheyenne, WY  
 DAX Sacramento, CA  
 DDC Dodge City, KS  
 DFX Del Rio/Laughlin AFB, TX  
 DIX Philadelphia, PA/Fort Dix, NJ  
 DLH Duluth, MN  
 DMX Des Moines/Johnston, IA  
 DOX Dover AFB, DE  
 DTX Detroit-Pontiac/White Lake, MI  
 DVN Quad Cities/Davenport, IA  
 DYX Abilene/Dyess AFB, TX  
 EAX Kansas City/Pleasant Hill, MO  
 EMX Tucson/Pima County, AZ  
 ENX Albany/East Berne, NY  
 EOX Fort Rucker, AL  
 EPZ El Paso, TX/Santa Teresa, NM  
 ESX Las Vegas/Nelson, NV  
 EVX Red Bay/Eglin AFB, FL  
 EWX Austin-San Antonio/New Braunfels, TX  
 EYX Edwards AFB, CA  
 FCX Roanoke/Coles Knob, VA  
 FDR Frederick/Altus AFB, OK  
 FDX Clovis/Cannon AFB, NM  
 FFC Atlanta/Peachtree City, GA  
 FSD Sioux Falls, SD  
 FSX Flagstaff/Coconino, AZ  
 FTG Denver/Boulder, CO  
 FWS Dallas/Fort Worth, TX  
 GGW Glasgow, MT  
 GJX Grand Junction/Mesa, CO  
 GLD Goodland, KS  
 GRB Green Bay/Ashwaubenon, WI  
 GRK Killeen/Fort hood, TX  
 GRR Grand Rapids, MI  
 GSP Greenville-Spartanburg/Greer, SC  
 GUA Agana, GU  
 GWX Columbus AFB, MS  
 GYX Portland/Gray, ME  
 HDX Alamogordo/Holloman AFB, NM  
 HGX Houston-Galveston/Dickinson, TX  
 HKI South Kauai/Numila, HI  
 HKM Kamuela/Puu Mala, HI  
 HMO Molokai/Kukui, HI  
 HNX San Joaquin Valley/Hanford, CA  
 HPX Fort Campbell, KY  
 HTX Hytop, AL  
 HWA South Hawaii/Naalehu, HI  
 ICT Wichita, KS  
 ICX Cedar City, UT  
 ILN Cincinnati/Wilmington, OH  
 ILX Lincoln, IL  
 IND Indianapolis, IN  
 INX Tulsa/Inola, OK  
 IWA Phoenix/Mesa, AZ  
 IWX North Webster, IN  
 JAN Jackson, MS  
 JAX Jacksonville, FL  
 JGX Warner Robins/Robins AFB, GA  
 JKL Jackson/Noctor, KY  
 JUA San Juan/Cayey, PR  
 LBB LUBBOCK, TX  
 LCH Lake Charles, LA  
 LIX New Orleans-Baton Rouge/Slidell, LA  
 LNX North Platte/Theford, NE  
 LOT Chicago/Romeoville, IL  
 LRX Elko/Sheep Creek Mountain, NV

December 1999

LSX ST. Louis/Research Park, MO  
LTX Wilmington/Charlotte, NC  
LVX Louisville/Fort Knox, KY  
LWX Baltimore, MD-Washington,  
DC/Sterling, VA  
LZK North Little Rock, AR  
MAF Midland/Odessa, TX  
MAX Medford/Mount Ashland, OR  
MBX Minot AFB, ND  
MHX Morehead City/Newport, NC  
MKX Milwaukee/Dousman, WI  
MLB Melbourne, FL  
MOB Mobile, AL  
MPX Minneapolis/Chanhausen, MN  
MQT Marquette/Negaunee, MI  
MRX Knoxville-Cities/Morristown, TN  
MSX Missoula/Point Six Mountain, MT  
MTX Salt Lake City/Promontory Point, UT  
MUX San Francisco/Mount Umunhum, CA  
MVX Fargo-Grand Forks/Mayville, ND  
MXX Carrville/Maxwell AFB, AL  
NKX San Diego/Miramar Nas, CA  
NQA Memphis/Millington, TN  
OAX Omaha/Valley, NE  
OHX Nashville/Old Hickory, TN  
OKX New York City/Upton, NY  
OTX Spokane, WA  
PAH Paducah, KY  
PBZ Pittsburgh/Coraopolis, PA  
PDT Pendleton, OR  
POE Fort Polk, LA  
PUX Pueblo, CO  
RAX Raleigh-Durham/Clayton, NC  
RGX Reno/Virginia Peak, NV  
RIW Riverton, WY  
RLX Charleston/Ruthdale, WV  
RMX Rome/Griffiss AFB, NY  
RTX Portland/Scappoose, OR  
SFX Pocatello-Idaho Falls/Springfield, ID  
SGF Springfield, MO  
SHV Shreveport, LA  
SJT San Angelo, TX  
SOX Santa Ana Mountains/Orange County, CA  
SRX Slatington Mountain, AR  
TBW Tampa/Ruskin, FL  
TFX Great Falls, MT  
TLH Tallahassee, FL  
TLX Oklahoma City/Norman, OK  
TWX Topeka/Alma, KS  
TYX Fort Drum, NY  
UDX Rapid City/New Underwood, SD  
UEX Hastings/Blue Hill, NE  
VAX Valdosta/Moody AFB, GA  
VBX Lompoc/Vandenberg AFB, CA  
VNX Enid/Vance AFB, OK  
VTX Los Angeles/Sulphur Mountain, CA  
YUX Yuma, AZ

**INTERNET ADDRESSES**

**NATIONAL WEATHER SERVICE HOME PAGE**

<http://www.nws.noaa.gov>

**INTERACTIVE WEATHER INFORMATION NETWORK (IWIN)**

<http://weather.gov>

**WEATHER CHARTS**

<http://weather.noaa.gov/fax/graph.shtml>

or

<http://weather.noaa.gov/fax/nwsfax.shtml>

**AVIATION DIGITAL DATA SERVICE**

<http://adds.awc-kc.noaa.gov>

**NWS NATIONAL CENTERS FOR ENVIRONMENTAL PREDICTION**

<http://www.ncep.noaa.gov>

**AVIATION WEATHER CENTER**

<http://www.awc-kc.noaa.gov>

**NWS LINKS**

<http://nimbo.wrh.noaa.gov/wrhq/nwspage.html>

or

<http://www.nws.noaa.gov/regions.shtml>

**ALASKAN AVIATION WEATHER UNIT**

<http://www.alaska.net/~aawu/>